

Quantum[®]

User's Guide

StorNext 4.1.2



Document Title, 6-01658-16 Rev A, June 2011, Product of USA.

Quantum Corporation provides this publication “as is” without warranty of any kind, either express or implied, including but not limited to the implied warranties of merchantability or fitness for a particular purpose. Quantum Corporation may revise this publication from time to time without notice.

COPYRIGHT STATEMENT

Copyright 2011 by Quantum Corporation. All rights reserved.

Your right to copy this manual is limited by copyright law. Making copies or adaptations without prior written authorization of Quantum Corporation is prohibited by law and constitutes a punishable violation of the law.


TRADEMARK STATEMENT

Quantum, the Quantum logo, DLT, DLTtape, the DLTtape logo, Scalar, and StorNext are registered trademarks of Quantum Corporation, registered in the U.S. and other countries.

Backup. Recovery. Archive. It’s What We Do., the DLT logo, DLTSage, DXi, DXi-Series, Dynamic Powerdown, FastSense, FlexLink, GoVault, MediaShield, Optyon, Pocket-sized. Well-armed, SDLT, SiteCare, SmartVerify, StorageCare, Super DLTtape, SuperLoader, and Vision are trademarks of Quantum.

LTO and Ultrium are trademarks of HP, IBM, and Quantum in the U.S. and other countries. All other trademarks are the property of their respective companies.

Specifications are subject to change without notice.

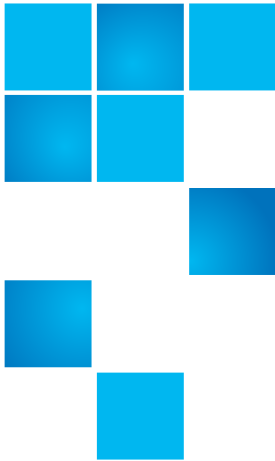

Contents

Chapter 1	Introduction	1
	About StorNext File System	1
	About StorNext Storage Manager	2
	About Distributed LAN Clients	2
	About Licensing	3
	Purpose of This Guide	3
	How This Guide is Organized	3
	Notes, Cautions, and Warnings	4
	Document Conventions	5
Chapter 2	StorNext GUI Overview	7
	Accessing the StorNext GUI	7
	The StorNext Home Page	10
	StorNext Monitors	11
	StorNext Home Page Dropdown Menus	14
Chapter 3	The Configuration Wizard	19
	High Availability Systems	20
	Step 1: Welcome	20

Step 2: Licenses	21
License Expiration and Limits	26
Updating Licenses	28
Licensing and Upgrades	29
Manually Editing the license.dat File	30
Step 3: Name Servers	31
Multiple fsnameserver Hosts	31
Entering Name Servers	33
Deleting a Name Server	34
Step 4: File Systems	34
Editing a File System and Performing Other Actions	39
Step 5: Storage Destinations	40
Adding a New Library	40
Viewing an Existing Library	43
Editing a Library	44
Deleting a Library	45
Performing Other Library Actions	45
Storage Disk Overview	46
Adding a New Storage Disk	47
Viewing an Existing Storage Disks	48
Editing a Storage Disk	49
Deleting a Storage Disk	50
Adding a New Data Replication Host	50
Editing a Data Replication Host	51
Deleting a Data Replication Target	52
Adding a New Mount Point	52
Enabling Data Deduplication	53
Step 6: Storage Policies	54
Adding a Storage Manager Storage Policy	55
Adding a Replication Storage Policy	61
Viewing a Storage Policy	61
Running a Storage Policy	62
Editing a Storage Policy	62
Deleting a Storage Policy	63
Step 7: Email Server	63
Adding an Email Server	64
Step 8: Email Notification	64
Adding an Email Recipient	65
Viewing Email Recipient Information	66
Editing an Email Recipient	67

Deleting an Email Recipient 67
 Step 9: Done 68

Chapter 4 File System Tasks 69

Label Disks 70
 Labeling a Device 70
 Unlabeling a Device 72
 Check File System 72
 Viewing and Deleting a Check Report. 74
 File System Check Output Files 74
 Affinities 75
 Allocation Strategy 75
 Example Use Cases 76
 Adding a New Affinity 77
 Deleting an Affinity. 78
 Migrate Data 79
 Truncation Parameters. 80

Chapter 5 Storage Manager Tasks 83

Storage Components. 84
 Setting Devices Online and Offline 85
 Additional Options for Tape Drives. 85
 Drive Pools. 85
 Viewing Drive Pool Information 86
 Adding a Drive Pool 87
 Editing a Drive Pool. 88
 Deleting a Drive Pool 88
 Media Actions 89
 Viewing Media Information 89
 Filtering Media 90
 Performing Media Actions 90
 Storage Exclusions. 98
 Accessing Storage Exclusions 98
 Adding an Exclusion Pattern 99

Truncation Exclusions	101
Accessing Truncation Exclusions	102
Adding an Exclusion Pattern	103
Tape Consolidation	105
Setting Tape Consolidation Parameters.	106
Scheduling Tape Cleaning and Defragmentation	108
Library Operator Interface	108
Software Requests.	110
Scheduler	111
Viewing a Schedule.	112
Adding a Schedule	112
Editing an Existing Schedule.	114
Deleting an Existing Schedule.	114
Alternate Retrieval Location.	115
Distributed Data Mover (DDM)	117
Distributed Data Mover Overview	117
Installing the DDM Feature on Clients.	121
Accessing Distributed Data Mover	121
Enabling DDM.	122
Managing DDM Hosts.	123
Host Priority	126
Distributed Data Mover Reporting	127
Disaster Recovery	127

Chapter 6	Replication and Deduplication	129
------------------	--------------------------------------	------------

Replication Overview	130
Replication Configuration Overview	130
Replication Process Overview	131
Files Excluded From Replication	132
Replication Terms and Concepts	133
Namespace Realization	133
Blockpool	134
Blackout Period	134
Replication Source Policy and Replication Source Directory	134
Replication Target Directory	134
Replication Schedule.	135
Replication Copies.	135
Bandwidth Throttling	135

Multilink	135
Virtual IP (vIP)	136
Some Replication Scenarios	136
Scenario 1: Simplest Replication	136
Scenario 2: Replicating Multiple Copies in the Same Target File System	137
Scenario 3: Replicating to Multiple Target Hosts / File Systems.	139
Additional Replication Possibilities	140
Non-Supported Replication Between Source and Target.	143
Non-Supported “Chained” Replication	143
Configuring Replication	144
Step 1: Create Source and Target File Systems	144
Step 2: Setting up the Blockpool.	147
Step 3: Creating Replication Targets	149
Step 4: Create a Replication Storage Policy	150
Configuration Steps Summary	156
Scheduling Replication Blackouts (Optional).	157
Optional HA and Multilink Configuration	159
Running Replication Manually (Optional)	163
Replication Statuses and Reporting	164
Replication Reports	164
Replication Administration	164
StorNext Jobs	165
Troubleshooting Replication	166
Data Deduplication Overview	166
How Deduplication Works	167
Deduplication and Replication	167
Setting Up Deduplication	168
Step 1: Creating a Deduplication-Enabled File System	168
Step 2: Specifying the Blockpool.	169
Step 3: Creating a Deduplication-Enabled Storage Policy	169
Data Deduplication Functions	171
Deduplication Administration	171
Deduplication Reports	171

Chapter 7	Tools Menu Functions	173
	User Accounts	175
	Adding a New User	175
	Viewing an Existing User Profile	177
	Modifying an Existing User	178
	Deleting an Existing User	179
	Changing the Admin Password	179
	Client Download	180
	System Control	182
	Starting or Stopping StorNext File System	183
	Starting or Stopping StorNext Storage Manager	183
	Refreshing System Status	184
	Specifying Boot Options	184
	File and Directory Actions	184
	Store Files	185
	Change File Version	186
	Recover Files	187
	Recover Directories	189
	Retrieve Files	192
	Retrieve Directory	193
	Truncate Files	193
	Move Files	194
	Modify File Attributes	195
	View File Information	197
	File Systems	198
	Storage Manager	198
	Replication and Deduplication	199
	HA	200
Chapter 8	Service Menu Functions	201
	The Health Check Function	201
	Running a Health Check	202
	Viewing the Health Check Results	203
	Viewing Health Check Histories	204

The Capture State Function	204
Creating a Capture State Log	205
Deleting a Previous System State Capture.	206
The System Backup Function	206
The Admin Alerts Function	207
The Tickets Function	209
Viewing Ticket Information.	209
Editing Ticket Information	211
Closing Tickets	212

Chapter 9	Converting to HA	213
	HA Overview	213
	HA Terms and Concepts	214
	Failover	214
	Primary Node	214
	Secondary Node	214
	Virtual IP (vIP)	215
	Virtual Netmask	215
	HA Reset	215
	Preparing for HA Conversion	216
	Pre-Conversion Steps	216
	HA and Distributed LAN Clients	217
	Converting to HA.	217
	HA Conversion Procedure	218
	Managing HA	219
	HA Statuses and Reporting	220
	Troubleshooting HA	221

Chapter 10	StorNext Reports	223
	Report Navigation Controls.	224
	StorNext Logs	224
	The Jobs Report.	226
	Viewing Detailed Job Information.	227
	Exiting the Jobs Report screen.	228

The File Systems Report	229
The SAN Devices Report	230
The Media Report	231
The Tape Consolidation Report	234
The SAN and LAN Clients Report	236
The LAN Client Performance Report	237
The Distributed Data Mover Report	239
Replication Deduplication Reports	240
Policy Activity Report	240
Policy Summary Report	242

Chapter 11	Customer Assistance	247
	Quantum Technical Assistance Center	247

Appendix A	Operating Guidelines	249
	The Reserved Space Parameter	249
	Linux Configuration File Format	250
	Distributed LAN Server/Client Network and Memory Tuning	251
	Distributed LAN Server and Client Network Tuning	251
	Distributed LAN Server Memory Tuning	253
	Configuring LDAP	254
	Using LDAP	254
	UNIX File and Directory Modes	255
	LDAP Refresh Timeout	255
	Setting Up Restrictive ACLs	256
	Default Single-Path I/O Retry Behavior	256
	Event Handles for fsm.exe on a Windows Metadata Server	256
	FSBlockSize, Metadata Disk Size, and JournalSize Settings	257
	Disk Naming Requirements	259
	Changing StorNext’s Default Session Timeout Interval	260
	General Operating Guidelines and Limitations	261

Appendix B	Additional Replication and Deduplication Information	277
	Replication Configuration File	277
	Replication Terminology and Conventions.	278
	Copies and Versions	278
	Replication Target Directories	279
	Number of Replication Copies.	280
	Isolating a Replication Target Directory.	281
	Final Recommendation For Target Directories.	282
	StorNext snpolicyd Policies	283
	Replication Copies = 2 (Detail)	286
	More About Replication Target Directories	289
	Deduplication Overview.	291
	Enabling Deduplication.	293
	Deduplication Modification Time	293
	Deduplication and Blockpools.	294
	Deduplication and Truncation	294
	Enabling Deduplication and Truncation	295
	Storage Manager Truncation	295
	Replication, Deduplication and Truncation	296
	Replication, Deduplication and Storage Manager	297
	Replicating into a Storage Manager Relation Point.	297
	Truncation and Deduplication / Replication (with and without SM)	299
	The snpolicyd Debug Log	306

Appendix C	High Availability Systems	309
	High Availability Overview.	310
	HA Internals: HAMon Timers and the ARB Protocol	312
	Primary and Secondary Server Status	316
	File System Types	316
	The <code>ha_peer</code> and <code>fsnameservers</code> File.	318
	HA Manager	318

Configuration and Conversion to HA	323
Conversion to HA	324
SyncHA process	325
Managing High Availability in the StorNext GUI	327
High Availability Operation	329
Windows and Linux SNFS Installations Without the HaShared File System	330
Linux SNMS and SNFS Installations with the HaShared File System	331
HA Resets	336
HA Resets of the First Kind	337
HA Resets of the Second Kind	338
HA Resets of the Third Kind	338
Using HA Manager Modes	338
HA Tracing and Log Files	339
Single (Singleton) Mode	340
FSM failover in HA Environments	341
Failover Timing	341
Replacing an HA System	345

Appendix D

Web Services API	349
Enabling WS-API	349
WS-API APIs	350
The doCancel API	350
The doMediaMove API	350
The doRetrieve API	351
The doStore API	351
The doTruncate API	351
The getDriveReport API	352
The getFileLocation API	352
The getMediaInfo API	352
The getMediaReport API	353
The getSMQueue API	353
The getSNAPIVersion API	353
The getSystemStatus API	354
The setMediaMoveInfo API	354

Appendix E	Storage Manager Truncation	355
	Truncation Overview	355
	Normal Truncation	356
	Immediate Truncation	356
	Daily Truncation	356
	Space Management	357
	LOSPACE Cycle	357
	Emergency Cycle	358
	Disabling Truncation	359
	Truncation Feature Locking	359
	Disable Truncation Commands	360
	Common Problems	360
	Files Are Not Truncated as Expected	360
	"Old" Files Not Truncating According to Policy Class	361
	Small Files Not Truncating	361
	Miscellaneous Usage Notes	361
Appendix F	Security	363
	StorNext Security	363
	ACLs on Windows	364
	ACLs on Mac OS X	368
	"Central Control"	371
	Limitations	373
	Example	373
	Cross-Platform Permissions	374
	Config (.cfg) File Options	375
Appendix G	Troubleshooting	377
	Troubleshooting StorNext File System	378
	Troubleshooting StorNext Storage Manager	386
	Troubleshooting OS Issues	388
	Troubleshooting Replication	391
	Troubleshooting HA	392
	Troubleshooting StorNext Installation and Upgrade Issues	396
	Troubleshooting Other Issues	397

<hr/>		
Appendix H	StorNext Offline Notification	401
	StorNext Offline Notification Overview	402
	What is a StorNext Offline File?	402
	Why Block Access to Offline Files?	402
	Offline Notification Configuration Options	403
	How the Notification Feature Operates.	403
	Installing the Notification Application	405
	Installing onto a Standalone Machine.	405
	Starting the Notification Application.	412
	Configuring the Notification Application.	413
	Setting Application Options	413
	Viewing Access Denied Files	415
	Viewing the Application Log.	416
	Exiting Application Preferences.	416
	Uninstalling the Notification Application	417
<hr/>		
Appendix I	RAS Messages	419
	Media and Drive RAS Messages.	419
	SNFS RAS Messages.	429
	Other RAS Messages	442



Figures

Figure 1	StorNext Login Window	8
Figure 2	System Control	9
Figure 3	StorNext Home Page.	11
Figure 4	Configuration > Configuration Wizard Welcome Screen .	21
Figure 5	Configuration > Licenses > Agreement Screen	24
Figure 6	Configuration > Licenses > Entry Screen	25
Figure 7	Configuration > Licenses > Entry Screen	26
Figure 8	Name Servers Screen	33
Figure 9	Configuration > File System Screen	35
Figure 10	Configuration > File System > New Screen	35
Figure 11	Configuration > File System > New Screen 2.	36
Figure 12	Configuration > File System > New Screen 3.	38
Figure 13	Configuration > File System > New Screen 3.	39
Figure 14	Storage Destinations > Library Screen	41
Figure 15	Storage Destinations > Library > New Screen.	42
Figure 16	Library Details Screen	43
Figure 17	Edit Library Screen	44

Figure 18	Configuration > Storage Destinations > Storage Disk Screen.	47
Figure 19	Storage Destinations > Storage Disk > New Screen.	48
Figure 20	View Storage Disk Screen	49
Figure 21	Configuration > Storage Destinations > Replication / Deduplication Screen	51
Figure 22	Configuration > Storage Destinations > Replication / Deduplication Screen (Blockpool)	53
Figure 23	Configuration > Storage Policies Screen	55
Figure 24	Storage Policies > New Screen	56
Figure 25	Storage Policies > New > General Tab.	57
Figure 26	Storage Policies > New > Relocation Tab	58
Figure 27	Storage Policies > New > Steering Tab	59
Figure 28	Storage Policies > New > Schedule Tab.	60
Figure 29	Storage Policies > New > Associated Directories Tab.	61
Figure 30	View Storage Policies Screen	62
Figure 31	Configuration > Email Server Screen	64
Figure 32	Configuration > Email Notifications Screen	65
Figure 33	Configuration > Email Notifications New Screen	66
Figure 34	Configuration > Configuration Wizard Done Screen	68
Figure 35	Label Disks Screen	71
Figure 36	Check File System Screen	73
Figure 37	Check File System Report	74
Figure 38	Affinities Screen	77
Figure 39	New Affinity Screen	78
Figure 40	Migrate Screen	80
Figure 41	Truncation Parameters Screen	81
Figure 42	Storage Components Screen	84
Figure 43	Drive Pools Screen	86
Figure 44	New Drive Pool Screen	87

Figure 45 Media Actions Screen 89

Figure 46 Storage Exclusions Screen. 99

Figure 47 Exclusion Screen 99

Figure 48 Truncation Exclusions Screen 103

Figure 49 Exclusion Screen 103

Figure 50 Tape Consolidation Screen 106

Figure 51 Library Operator Interface Screen 109

Figure 52 Software Requests Screen. 110

Figure 53 Scheduler Screen 112

Figure 54 Scheduler > New Screen 113

Figure 55 Alternate Retrieval Location Screen 116

Figure 56 Configuration > Distributed Data Mover Screen 122

Figure 57 DDM Screen New Host 124

Figure 58 Replication Process 132

Figure 59 Replication scenario 1 137

Figure 60 Replication Scenario 2 138

Figure 61 Replication Scenario 3 140

Figure 62 Replicating From One Source to Multiple Targets. 141

Figure 63 Replicating From Multiple Sources to One Target. 142

Figure 64 Non-Supported Replication From Source to Target 143

Figure 65 Configuration > File System > New Screen 145

Figure 66 Configuration > File System > New Screen 2. 146

Figure 67 Configuration > File System > New Screen 3. 147

Figure 68 Configuration > Storage Destinations > Deduplication
Screen (Blockpool) 148

Figure 69 Storage Destinations > Replication Targets Screen 149

Figure 70 Configuration > Storage Policies > New Screen 151

Figure 71 Configuration > Storage Policies > New / Source
Directories Screen. 152

Figure 72 Storage Policies > New > Outbound Replication Tab . . 153

Figure 73	Outbound Replication Tab > Replication Schedule.	154
Figure 74	Configuration > Storage Policies Screen (Select "target").	155
Figure 75	Storage Policies > Edit > target > Inbound Replication Tab	156
Figure 76	Configuration > Storage Policies (Run Policy).	157
Figure 77	Storage Policies > New > Blackout Tab	158
Figure 78	Tools > HA Convert Screen.	160
Figure 79	Tools > Replication > Bandwidth Screen	162
Figure 80	Tools > Replication/Deduplication > Administration Screen.	165
Figure 81	Deduplication	167
Figure 82	Replication/Deduplication Policy Screen	170
Figure 83	User Accounts Screen	175
Figure 84	New User Screen.	176
Figure 85	Edit User Screen	177
Figure 86	Edit User Screen	178
Figure 87	Edit Admin Screen	180
Figure 88	Client Download Screen	181
Figure 89	Client Download Link	181
Figure 90	System Control Screen	183
Figure 91	File and Directory Action Screen	185
Figure 92	Change File Version Screen.	187
Figure 93	Recover Files Browse Screen	188
Figure 94	Recover Directories Browse Screen	190
Figure 95	Retrieve Files Screen	192
Figure 96	Retrieve Directory Screen	193
Figure 97	Truncate Files Screen	194
Figure 98	Move Files Screen	195
Figure 99	Modify File Attributes Screen	196

Figure 100 View File Info Screen 197

Figure 101 Health Check Screen 202

Figure 102 Health Check > View Selected Screen 203

Figure 103 Health Check > View History Screen. 204

Figure 104 Capture State Screen 205

Figure 105 Backup Screen 207

Figure 106 Admin Alerts Screen 208

Figure 107 Tickets Screen 209

Figure 108 Tickets > View Ticket Screen 210

Figure 109 Tickets > Edit Ticket Screen 212

Figure 110 Tools > HA Screen 218

Figure 111 Manage HA Screen 220

Figure 112 Reports > Logs Screen 225

Figure 113 Jobs Report. 226

Figure 114 File Systems Report. 229

Figure 115 SAN Devices Report 230

Figure 116 Media Report 232

Figure 117 Media Information Report 234

Figure 118 Tape Consolidation Report 235

Figure 119 SAN and LAN Clients Report. 236

Figure 120 LAN Client Performance Report 238

Figure 121 Distributed Data Mover Report. 239

Figure 122 Replication/Deduplication Policy Activity Report. 241

Figure 123 Replication/Deduplication Policy Summary Report. 243

Figure 124 Replication/Deduplication Policy Details Report. 244

Figure 125 Replication/Deduplication Policy Completion Report . . . 245

Figure 126 High Availability Manage Screen 328

Figure 127 FSM Failover in an HA Cluster. 342

Figure 128 Run as Administrator 406

Figure 129	Logging in to the Administrator Account	406
Figure 130	Installing the .NET Framework	407
Figure 131	Offline Notification Setup Wizard	408
Figure 132	Quantum End User License Agreement	409
Figure 133	Select Installation Folder	410
Figure 134	Confirm Installation	410
Figure 135	Installation Complete	411
Figure 136	Manual Start	412
Figure 137	Application Options	414
Figure 138	Access Denied List	415
Figure 139	Application log	416
Figure 140	Removing the Application	417
Figure 141	Possible Drive/Media Mount Discrepancy RAS	420
Figure 142	Tape Drive Alerts RAS part 1	421
Figure 143	Tape Drive Alerts RAS part 2	422
Figure 144	Tape Drive Alerts RAS part 3	423
Figure 145	Drive Reported Drive Error RAS	424
Figure 146	Cleaning of Drive Failed RAS	425
Figure 147	Wrong Firmware Level/Invalid Drive Type RAS	426
Figure 148	Tape Drive - Reported Media Error RAS	427
Figure 149	Cleaning Media Expired RAS	428
Figure 150	Duplicate Physical Media Found RAS	428
Figure 151	Storage Disk Taken Offline RAS	429
Figure 152	Configuration Not Supported RAS	430
Figure 153	Label Validation Failure RAS	430
Figure 154	Connection Rejected RAS	431
Figure 155	File System Failover RAS	431
Figure 156	I/O Error RAS	432
Figure 157	Journaling Error Detected RAS	432

Figure 158 SNFS License Required RAS 433

Figure 159 SNFS License Failure RAS 433

Figure 160 LUN Mapping Changed RAS 434

Figure 161 Communication Failure RAS 434

Figure 162 Metadata Inconsistency Detected RAS 435

Figure 163 Bad File System Metadata Dump RAS 435

Figure 164 Metadata Dump Failure RAS 436

Figure 165 File System or Metadata Capacity Warning RAS 436

Figure 166 File Processing Failure RAS 437

Figure 167 Missing LUNs RAS 437

Figure 168 Disk Space Allocation Failure RAS 438

Figure 169 System Resource Failure RAS 438

Figure 170 Affinity Configuration Violations RAS 439

Figure 171 Quota Limit or Fragmentation Warnings RAS 440

Figure 172 Shutdown Error RAS 440

Figure 173 Initialization Failure RAS 441

Figure 174 SNFS I/O Error RAS 441

Figure 175 Port Failure 442

Figure 176 Checksum Error RAS 443

Figure 177 Troubleshooting the StorNext Software RAS 444

Figure 178 Software Resource Violations RAS 445

Figure 179 Vault Failure RAS 446

Figure 180 Robotics - Not Ready RAS 446

Figure 181 Robotics - Move Failure RAS 447

Figure 182 Robotics - Wrong Firmware Level/Invalid Library Type
RAS 448

Figure 183 Backup Errors RAS 449

Figure 184 Invalid Configuration RAS part 1 450

Figure 185 Invalid Configuration RAS part 2 451



Chapter 1 Introduction

StorNext is data management software that enables customers to complete projects faster and confidently store more data at a lower cost. Used in the world's most demanding environments, StorNext is the standard for high performance shared workflow operations and multitier archives. StorNext consists of two components: StorNext File System (SNFS), a high performance data sharing software, and StorNext Storage Manager (SNSM), the intelligent, policy-based data mover.

About StorNext File System

StorNext File System streamlines processes and facilitates faster job completion by enabling multiple business applications to work from a single, consolidated data set. Using SNFS, applications running on different operating systems (Windows, Linux, Solaris, HP-UX, AIX, and Mac OS X) can simultaneously access and modify files on a common, high-speed SAN storage pool.

This centralized storage solution eliminates slow LAN-based file transfers between workstations and dramatically reduces delays caused by single-server failures. In high availability (HA) configurations, a redundant server is available to access files and pick up processing requirements of a failed system, and carry on processing.

About StorNext Storage Manager

StorNext Storage Manager enhances the StorNext solution by reducing the cost of long term data retention, without sacrificing accessibility. SNSM sits on top of SNFS and utilizes intelligent data movers to transparently locate data on multiple tiers of storage. This enables customers to store more files at a lower cost, without having to reconfigure applications to retrieve data from disparate locations. Instead, applications continue to access files normally and SNSM automatically handles data access – regardless of where the file resides. As data movement occurs, SNSM also performs a variety of data protection services to guarantee that data is safeguarded both on site and off site.

About Distributed LAN Clients

StorNext supports *distributed LAN clients*. Unlike a traditional StorNext SAN client, a distributed LAN client does not connect directly to StorNext via fibre channel or iSCSI, but rather across a LAN through a gateway system called a *distributed LAN server*. The distributed LAN server is itself a directly connected StorNext client, but it processes requests from distributed LAN clients in addition to running applications.

Any number of distributed LAN clients can connect to multiple distributed LAN servers. StorNext File System supports Distributed LAN client environments in excess of 1000 clients.

Besides the obvious cost-savings benefit of using distributed LAN clients, there will be performance improvements as well.

Distributed LAN clients must be licensed in the same way as StorNext SAN clients. When you request your permanent StorNext license, you will need to specify the number of distributed LAN clients you plan to use. Naturally, you can always purchase additional distributed LAN client licenses as your needs expand. For more information about StorNext licensing, see [Step 2: Licenses](#) on page 21

StorNext provides distributed LAN client information via the status monitors on the StorNext home page. More detailed information is available through the Clients Report and Distributed LAN Client Performance Report. For more information about StorNext reports, see [Chapter 10, StorNext Reports](#).

Before you can fully use distributed LAN clients, you must first configure a distributed LAN server and distributed LAN clients as described in the *StorNext Installation Guide*.

About Licensing

Beginning with StorNext 4.0, licensing has changed significantly compared to previous releases. Multiple licenses are now required for various StorNext features, as well as to perform an upgrade to a new release.

If you have not already installed StorNext 4.0 (or upgraded from a previous release), be sure to read the procedure in the section [Step 2: Licenses](#) on page 21 before you proceed.

Purpose of This Guide

This guide is intended to assist StorNext users perform day-to-day tasks with the software. This guide also describes how to generate reports. Quantum recommends using the graphical user interface to accomplish tasks, but an appendix provides alternative procedures for users who wish to perform those tasks via the command line interface.

How This Guide is Organized

This guide contains the following chapters:

- [Chapter 1, Introduction](#)
- [Chapter 2, StorNext GUI Overview](#)
- [Chapter 3, The Configuration Wizard](#)
- [Chapter 4, File System Tasks](#)
- [Chapter 5, Storage Manager Tasks](#)
- [Chapter 6, Replication and Deduplication](#)
- [Chapter 7, Tools Menu Functions](#)
- [Chapter 8, Service Menu Functions](#)
- [Chapter 9, Converting to HA](#)
- [Chapter 10, StorNext Reports](#)

- [Chapter 11, Customer Assistance](#)
- [Appendix A, Operating Guidelines](#)
- [Appendix B, Additional Replication and Deduplication Information](#)
- [Appendix C, High Availability Systems](#)
- [Appendix D, Web Services API](#)
- [Appendix E, Storage Manager Truncation](#)
- [Appendix F, Security](#)
- [Appendix G, Troubleshooting](#)
- [Appendix H, StorNext Offline Notification](#)
- [Appendix I, RAS Messages](#)

Notes, Cautions, and Warnings

The following table describes important information about Notes, Cautions, and Warnings used throughout this guide.

Description	Definition	Consequences
Note:	Indicates important information that helps you make better use of the software.	No hazardous or damaging consequences.
Caution:	Advises you to take or avoid a specified action.	Failure to take or avoid this action could result in loss of data.
Warning:	Advises you to take or avoid a specified action.	Failure to take or avoid this action could result in physical harm to the user or hardware.

Document Conventions

This guide uses the following document conventions to help you recognize different types of information.

Conventions	Examples
For all UNIX-based commands, the # prompt is implied, although it is not shown.	TSM_control stop is the same as # TSM_control stop
For all UNIX-based commands, words in <i>italic</i> are variables and should be replaced with user-defined values.	cvaffinity <filename> where <filename> is a variable and should be replaced with a user-defined value.



Chapter 2

StorNext GUI Overview

This section describes how to access and navigate through the StorNext GUI.

This chapter includes the following topics:

- [Accessing the StorNext GUI](#)
- [The StorNext Home Page](#)

Note: StorNext supports internationalization for the name space of the file system. This support is fully UTF-8 compliant. It is up to the individual client to set the proper UTF-8 locale.

Accessing the StorNext GUI

The StorNext GUI is browser-based and can be remotely accessed from any machine with access to the StorNext server.

Use this procedure to access the StorNext GUI.

- 1 Open a Web browser.

Note: The following browsers have been tested to work with StorNext. Browsers not listed may work but are not recommended.

- Internet Explorer 7.x and 8.x
- FireFox 3.x


To ensure proper browser operation, all monitors must be set to display at a minimum resolution of 1024 x 768. If you use a popup blocker, be sure to enable pop-ups in order to ensure that StorNext displays properly.

2 In the browser's **Address** field, type the full address of the machine and its port number, and then press **Enter**. For example: `http://<machine name>:<port number>`. Use the name of the machine and port number you copied when you installed the StorNext software.

Note: Typically, the port number is 81. If port 81 is in use, use the next unused port number. (I.e., 82, 83, etc.)

After you enter the machine name and port number, the following window appears:


Figure 1 StorNext Login Window

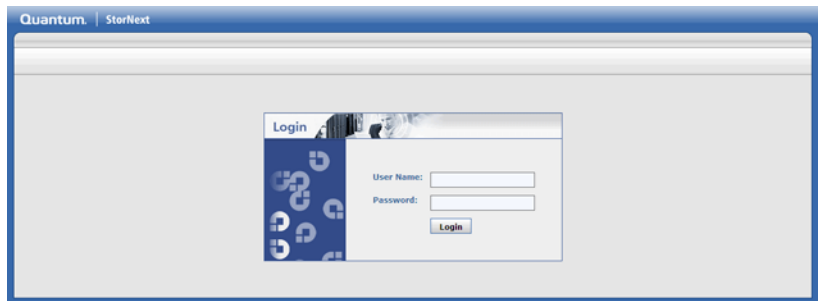

- 3 In the **User ID** field, type admin.
- 4 In the **Password** field, type password.

5 Click **Login**. The initial StorNext **System Control** screen appears.

Figure 2 System Control

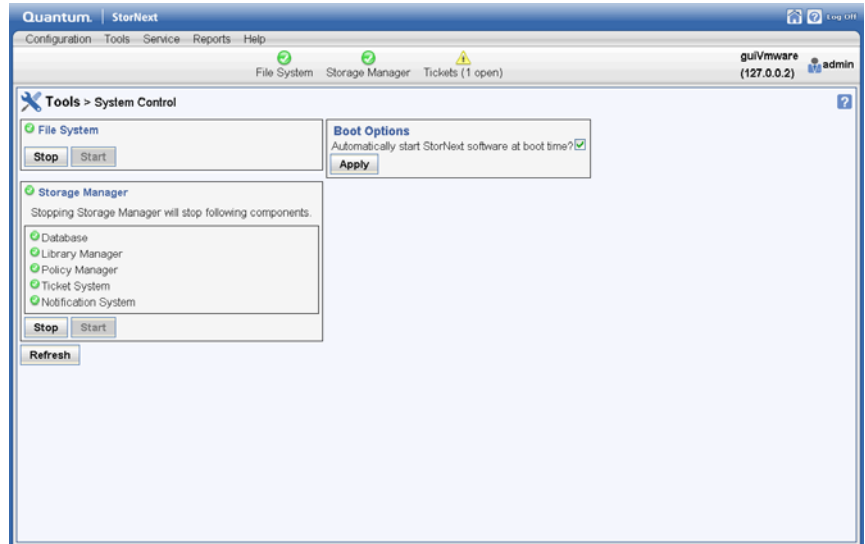

- 6 On this screen you can determine if the StorNext File System and Storage Manager components are currently started. If not, click **Start** for each component to start them.
- 7 Click the home (house) icon in the upper right corner to go to the StorNext Home Page.

Note: When you log into StorNext for the first time, you might see a message warning you about a security certificate. Refer to the Quantum Knowledge Base for a permanent workaround to this issue. For a temporary solution, create a certificate exception that will allow you to log into StorNext without seeing the warning message during subsequent logins.

The StorNext Home Page

On the home page you will find the following:


- Status and Capacity Monitors for file systems, libraries, storage disks, and tape drives
- Dropdown Menus: Setup, Tools, Service, Reports and Help
- Current status indicators for the file system and Storage Manager
- A link to the tickets page (if tickets exist)
- A link to admin alerts (if they exist)
- A link to the Library Operator Actions Required page if actions exist
- A link to blockpool status if the blockpool is in the process of starting up

From any page you can return to the StorNext home page by clicking the Home (house) icon in the upper right corner of the screen.

Beside the Home icon is a question mark icon. Clicking this icon displays a list of StorNext online help topics.

Displayed in the upper right corner beneath the home and help icons is the user name or IP address of the StorNext user currently logged in.

Figure 3 StorNext Home Page

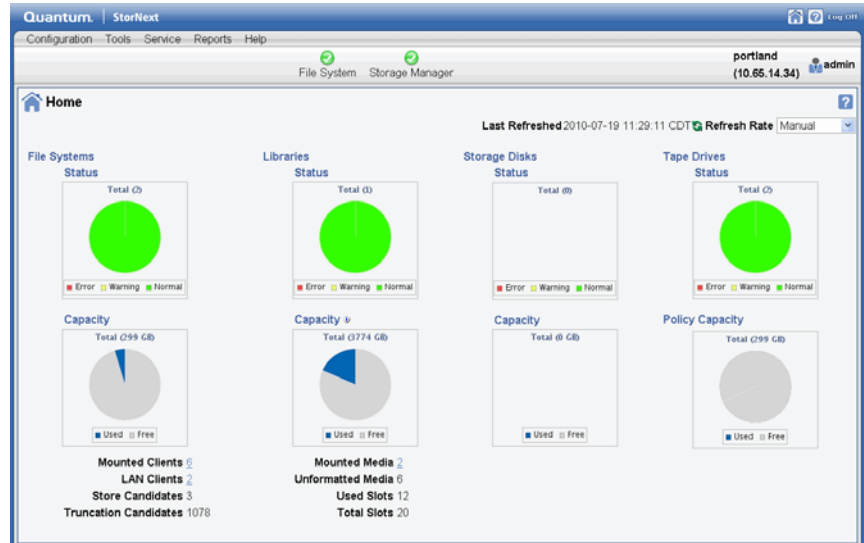

StorNext Monitors

The StorNext Home Page displays the following status and capacity monitors which are used to show the current state of the StorNext system:

- [File Systems Capacity Monitor](#)
- [Libraries Capacity Monitor](#)
- [Storage Disks Capacity Monitor](#)
- [Tape Drive Status](#)
- [Policy Capacity Monitor](#)

Use these monitors to view current statistics of managed or unmanaged file systems and configured libraries and/or drives, including file system, library, and drive information. Each of the status monitors provides an at-a-glance view of the total number of components (file systems, libraries, storage disks, or tape drives) and the current state of the file system: green for normal, yellow for warning, and red for error.

The information shown in the monitors is refreshed periodically. You can specify the refresh rate by choosing the desired interval from the Refresh Rate list:

- No Refresh
- 30 seconds
- 1 minute
- 2 minutes
- 5 minutes
- 10 minutes

File Systems Capacity Monitor

The File Systems Capacity Monitor provides the following information:

- Total space (in GB) for the file system
- A graphical representation of the free and used space amount
- The number of active StorNext SAN clients (connected via fibre channel or iSCSI) for which you are licensed
- The number of StorNext distributed LAN clients for which you are licensed. For more information about distributed LAN clients, see [About Distributed LAN Clients](#) on page 2.
- The number of store candidates, which are files selected for storage to secondary media.
- The number of files that have been stored and meet the criteria to become a truncation candidate.
- Current status (Error, Warning or Normal)

Libraries Capacity Monitor

The Libraries Capacity Monitor provides the following information:

- Total space (in GB) for the library. (This amount is an approximation if the library contains unformatted media.)
- A graphical representation of the library's free and used space amount
- The number of mounted and unmounted media

- The number of used slots
- The total number of slots
- Current status (Error, Warning or Normal)

Storage Disks Capacity Monitor

The Storage Disks Capacity Monitor provides the following information:

- Total number of storage disks
- A graphical representation of the free and used space amount
- Current status (Error, Warning or Normal)

Tape Drive Status

The Tape Drive Status Monitor provides the following information:

- Total number of tape drives
- A graphical representation of the free and used space amount
- Current status (Error, Warning or Normal)

Policy Capacity Monitor

The Policy Capacity Monitor provides the following information:

- Total space (in GB) for policy
- A graphical representation of the free and used space amount

Note: NOTE: The home page status and capacity monitors are intended to give you an **approximate** at-a-glance view of all the file systems, libraries, storage disks etc. on your system.

For a detailed, more accurate summary of your system's components, click inside one of the Status or Capacity boxes to view all file system, libraries, storage disks, and so on. (For example, click inside either the File Systems Status or Capacity box to view all file systems.)

StorNext Home Page Dropdown Menus

The dropdown menu options located in the bar at the top of every page allow you to access StorNext setup, tools, service, and reporting options.

The StorNext home page contains these drop-down menus and menu options:

The Configuration Menu

Use these menu options to launch the Configuration Wizard or complete individual configuration tasks.

- **Configuration Wizard:** Launches the StorNext Configuration Wizard
- **License:** Enter StorNext license information
- **Name Servers:** Enter and set order for servers used for StorNext file systems
- **File Systems:** Add a file system to your environment
- **Storage Destinations:** Add a library or storage disk, or set up data replication and deduplication
- **Storage Policies:** Add a storage policy to a file system
- **Email Server:** Configure the email server to use for notifications
- **Email Notifications:** Configure email notifications for Service Tickets, Admin Alerts, StorNext Backups, and Policy Class Alerts

The Tools Menu

Use these options to control day-to-day operations of StorNext.

- **User Accounts:** Control user access to StorNext tasks
- **Client Download:** Download StorNext client software
- **System Control:** Stop or start the file system or StorNext Storage Manager, and specify whether to automatically start StorNext at system startup
- **File and Directory Actions:** Perform file-related and directory-related tasks such as storing and moving files, recovering and retrieving files and directories, and modifying file attributes.

- **File Systems**
 - **Label Disks:** Label disk drives
 - **Check File System:** Run a check on your file system before expanding the file system or migrating a stripe group.
 - **Affinities:** Add affinities to the file system.
 - **Migrate Data:** Migrate the file system's stripe group(s)
 - **Truncation Parameters:** Manage the file system's truncation parameters
- **Storage Manager**
 - **Storage Components:** View current status for libraries, storage disks, and tape drives; place one or more of these components online or offline
 - **Drive Pools:** Add, modify, or delete drive pools
 - **Media Actions:** Remove media from a library or move media from one library to another
 - **Library Operator Interface:** Enter or eject media from the Library Operator Interface
 - **Software Requests:** View or cancel pending software requests
 - **Scheduler:** Schedule file system events including Clean Info, Clean Versions, Full Backup, Partial Backup, and Rebuild Policy
 - **Alternate Retrieval Location:** Specify a remote retrieval location to use in situations where files stored on tape or a storage disk cannot be accessed.
 - **Distributed Data Mover:** Distribute data movement operations from the metadata controller to client machines.
- **Replication/Deduplication**
 - **Administration:** View current progress for data replication, data deduplication, and truncation operations
 - **Replication Targets:** Add replication hosts and mount points to your replication targets, and edit properties for existing hosts and mount points
 - **Replication Bandwidth:** Monitor bandwidth usage for ongoing data replication processes

- **High Availability**
 - **Convert:** Convert to a High Availability (HA) configuration
 - **Manage:** Manage an HA configuration

The Service Menu

Use these options to monitor and capture system status information.

- **Health Check:** Perform one or more health checks on StorNext and view recent health check results
- **Capture State:** Obtain and preserve detailed information about the current StorNext system state
- **System Backup:** Run a backup of StorNext software
- **Admin Alerts:** View informational messages about system activities
- **Tickets:** View, edit, or close service tickets generated for the system

The Reports Menu

Use these options to view StorNext reports.

- **Logs:** Access logs of StorNext operations
- **Jobs:** View a list of pending and completed jobs on the system
- **File Systems:** View file system statistics including active clients, space, size, disks, and stripe groups
- **SAN Devices:** View information about devices currently attached to your SAN, including disks/LUNs, libraries, and tape drives
- **LAN Client Performance:** View information about distributed LAN clients and servers, including read and write speed
- **SAN and LAN Clients:** View statistics for StorNext clients, including the number of connected clients and distributed LAN clients, and client performance

- **Replication/Deduplication**
 - **Policy Activity:** View replication and deduplication performance statistics
 - **Policy Summary:** View replication and deduplication information for each policy
- **Distributed Data Mover:** View activity related to the Distributed Data Mover feature

The Help Menu

Use these options to access StorNext documentation, find Quantum contact information, or detailed information about this version of StorNext.

- **Documentation:** Access the StorNext documentation
- **Support:** Access Quantum Technical Support information
- **About:** Access detailed information about your version of StorNext and the system on which it is running. Also shows StorNext patent information.



Chapter 3

The Configuration Wizard

StorNext includes a Configuration Wizard that guides you through the process of setting up your StorNext system. The wizard includes tasks you would typically perform when you are first configuring your system.

The Configuration Wizard appears automatically when you launch StorNext for the first time. As you complete tasks, click **Next** to proceed to the next configuration task, or click **Back** to return to the previous task. Some tasks allow you to skip the task for configuration at a later time. These tasks have a **Next/Skip** button instead of a **Next** button.

You can display the Configuration Wizard at any time by selecting **Configuration Wizard** from the StorNext **Configuration** menu. If you have completed all of the tasks, each task will be marked as Complete. If you have not completed all tasks, the ones you finished will be marked Complete and the wizard will be ready for you to begin the next uncompleted task.

You can perform any of the Configuration Wizard's tasks separately rather than through the wizard. Each of these tasks is selectable from the StorNext **Configuration** menu.

Following are the setup and configuration tasks the Configuration Wizard allows you to complete:

- [Step 1: Welcome](#): View disks and libraries currently available for StorNext usage
- [Step 2: Licenses](#): Enter StorNext License Information

- [Step 3: Name Servers](#): Specify and order the machines acting as StorNext name servers
- [Step 4: File Systems](#): Add a StorNext file system
- [Step 5: Storage Destinations](#): Add a library, storage disks, and other storage destinations
- [Step 6: Storage Policies](#): Add a Storage Manager or replication storage policy
- [Step 7: Email Server](#): Specify an email server to handle StorNext notifications
- [Step 8: Email Notification](#): Add email notifications recipients
- [Step 9: Done](#): Signify that you are finished using the Configuration Wizard. You can also convert to a high availability (HA) system.

This chapter provides an overview of the steps necessary to complete each of the Configuration Wizard's tasks.

High Availability Systems


This chapter contains some instructions that pertain to high availability (HA) systems, but if you plan to convert to HA you should read [Chapter 9, Converting to HA](#). In particular, be sure to read and follow the [Pre-Conversion Steps](#) on page 216.

Step 1: Welcome

The first screen in the Configuration Wizard is the Welcome screen. This screen shows disks and libraries that are currently available for StorNext usage. As you add new disks and libraries, the information on this screen is updated.

If desired, you can manually update the screen by clicking **Refresh**. When you are ready to proceed to the next step, click **Next** in the left column.

Figure 4 Configuration > Configuration Wizard Welcome Screen

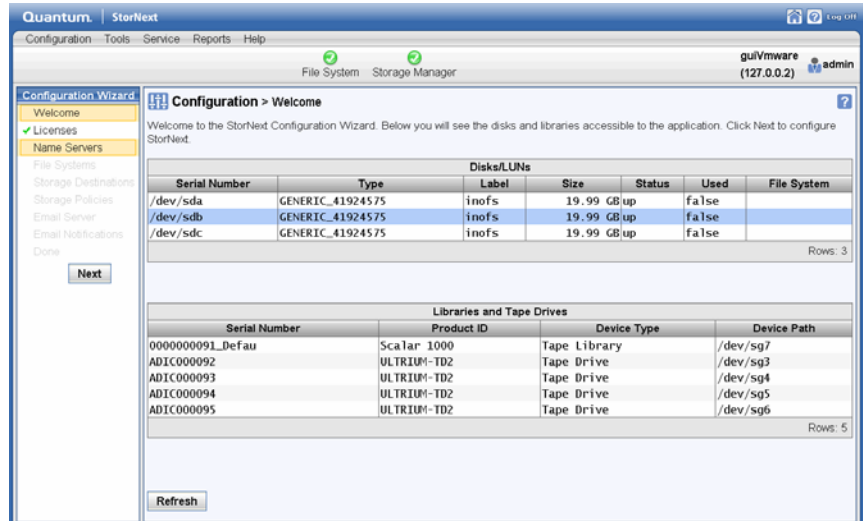

Step 2: Licenses

Use the Enter License wizard to enter license strings for the StorNext products you have purchased. You must have a license to configure or use StorNext products or features.

If the `license.dat` file does not contain permanent licenses, StorNext produces an auto-generated license with an expiration date for all StorNext products and features except Deduplication and Archive Conversion. In some cases Quantum may provide evaluation licenses for features. Evaluation licenses also have a fixed expiration date.

Beyond the evaluation period, you must have a permanent license to configure or use StorNext features.

Note: On HA systems, auto-generated licenses must be replaced on *both* HA MDCs, and StorNext must be run on the secondary only for this purpose.

Also, if you manually edit the `license.dat` file, you must restart StorNext after making changes.

Here is a list of StorNext licenses:

- **File System:** A File System license enables you to create and modify StorNext-supported file systems.
- **LAN Client:** You must have a Distributed LAN Client license for each LAN client you use with StorNext (in addition to any SAN clients).
- **Storage Manager:** A Storage Manager license provides full access to StorNext's Storage Manager features that are not licensed separately.
- **Replication:** A Replication license is required if you want to use StorNext's Data Replication feature.
- **Deduplication:** A Deduplication license is required if you want to use StorNext's Data Deduplication (blockpool) feature.
- **Vaulting:** A Vaulting license provides the ability to move seldom-used media to a manual archive vault, freeing room for media in the managed archives.
- **Storage Disk:** You must have a Storage Disk license to be able to configure and use StorNext storage disks.
- **Checksum:** A Checksum license enables you to verify data integrity by ensuring that the checksum created when data was stored matches the checksum upon data retrieval.
- **Distributed Data Mover (DDM):** A license is required for using DDM if you plan to use additional machines besides the primary server to distribute data streams.

- **Failover (HA):** A Failover (High Availability) license is required if you plan to use StorNext's HA failover features.

Note: Both MDCs' license.dat files are merged into one file when the conversion to HA is performed in the final Configuration Wizard steps. Be sure to read [Chapter 9, Converting to HA](#) so you understand this HA-related step in the Configuration Wizard.

- **Maintenance:** A Maintenance license verifies that your site has purchased StorNext upgrade licenses, and is required for StorNext upgrades.
- **Archive Conversion:** An Archive Conversion license is required if you plan to use StorNext's conversion tool to read and migrate data from non-StorNext archive media into the StorNext file system. (To purchase or configure the Archive Conversion tool, contact your Quantum Sales representative.)

To obtain permanent product/feature licenses, you must contact the Quantum Technical Assistance Center at licenses@Quantum.com and give them the following information:

- The serial number from your product CD or box.
- A list of the products/features you wish to license
- The number of StorNext SAN clients and distributed LAN clients you want to support, as well as capacity.
- The StorNext server identification number. You can find this number on the Configuration Wizard's **Configuration > Licenses** screen.

After the Quantum Technical Assistance Center receives the above information, a representative will send you license strings for the products/features you specified. Enter these license strings on the **Configuration > Licenses > Entry** screen to begin using StorNext features.


Note: You cannot mix auto-generated/evaluation and permanent licenses. Once you enter one or more permanent licenses in StorNext, all auto-generated/evaluation licenses are deleted. If you are using an auto-generated or evaluation license period to evaluate new features, be aware that you will lose any remaining time on those licenses as soon as you enter one or more permanent license.

After you have entered permanent licenses, you should not install an evaluation license.

There are two ways to access the Enter License wizard:


- Through the StorNext Configuration wizard
 - By choosing **Licenses** from the **Configuration** menu
- 1 When the Configuration Wizard is displayed, choose **Licenses** on the left side of the screen. (Alternatively, choose **Licenses** from the **Configuration** menu.) The **Configuration > Licenses > Agreement** screen appears. You must accept the license agreement in order to continue with the licensing process.

Figure 5 Configuration > Licenses > Agreement Screen

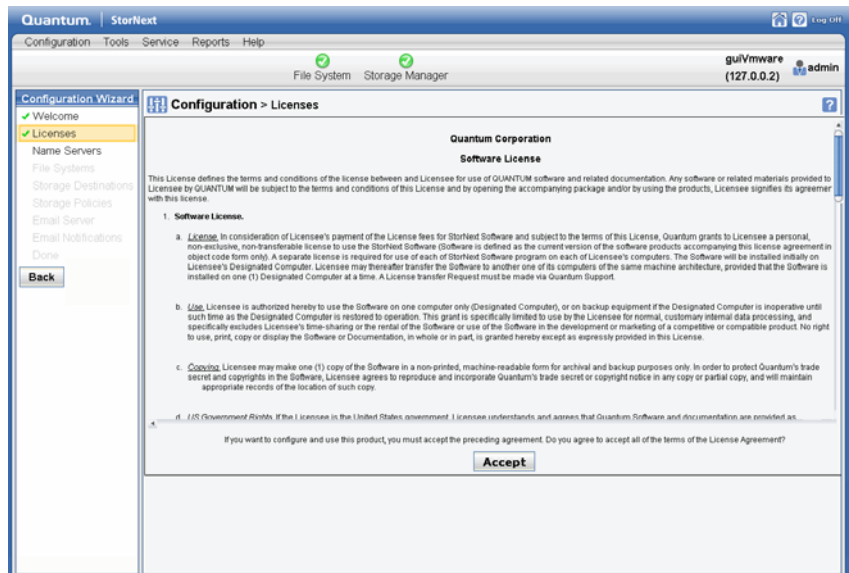

- 2 Read the license carefully, and then click **Accept**. The **Configuration > Licenses > Entry** screen appears.

Figure 6 Configuration > Licenses > Entry Screen

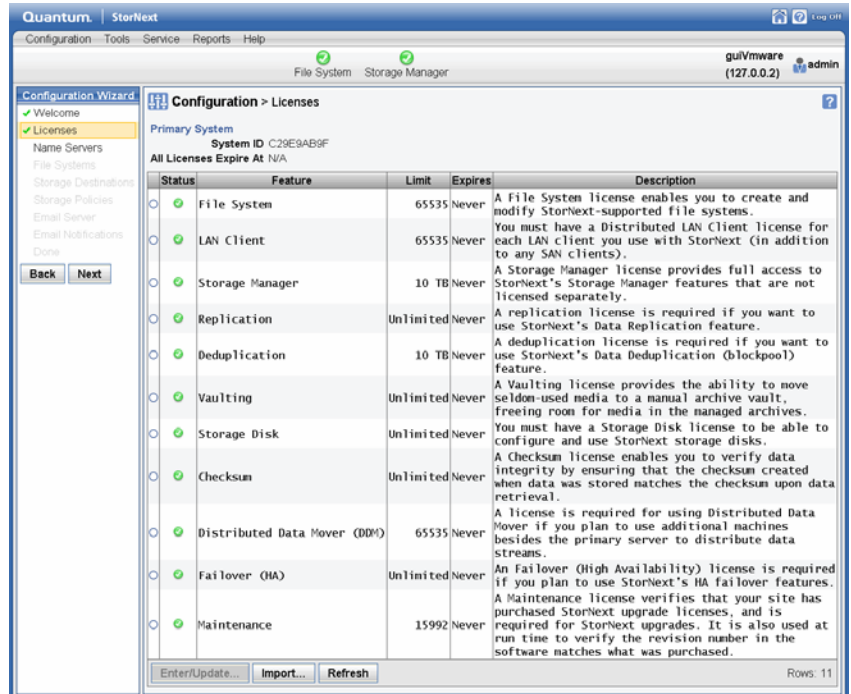

- 3 To import license string information from a text file, click **Import**. When the **Import License File** window appears, click **Browse** and navigate to the file's location. Click **Close** to continue.

A message at the top of the screen informs you whether the information was successfully imported and copied from the file into the StorNext license file. The status indicator changes to enabled (a green check mark icon and you are now ready to activate your licenses.

- 4 To enter licenses individually, select the product/feature and then click **Enter/Update**. At the [License/Feature Name] License field, enter the license string you received from Quantum. Click **Apply** to apply the string.

Figure 7 Configuration >
Licenses > Entry Screen



A message at the top of the screen informs you whether the information was successfully validated and copied into the StorNext license file. The status indicator changes to enabled (a green check mark icon).

License Expiration and Limits

Each StorNext feature license has a license expiration date (shown in the **Expires** column) and a limit shown in the **Limit** column.

Following is an explanation of the limit for each feature as it pertains to licensing:

- **File System:** The number displayed is the maximum number of SAN clients allowed
- **LAN Clients:** The number displayed is the maximum number of LAN clients allowed
- **Storage Manager:** The number displayed is the licensed capacity for files being managed by the SNSM software.

The current used capacity for the Storage Manager feature is determined as follows: It is the sum of all managed files that have been copied to Storage Manager media. This includes tape media and also storage disk. (The capacity calculation does not include files on tape media that have been moved to a vault archive.)

Note the following about the used space that is tracked:

- The used space includes the sizes of all files stored to the media. This includes multiple copies of files, if present, as well as old versions available for recovery.

- The used space includes the size of the header information written to the media with the file. This header contains information used to verify file information at retrieve time, etcetera.
- If compression is enabled, the used space is determined by the native size of the files and not the compressed size.
- For tape media, the used space includes “dead space” for files that have been removed or modified, and for which fscclean has been run to clean up knowledge of the file in the Storage Manager database.

Note: The capacity for storage disks does not include “dead space” but does include *all* data on the file system where the storage disk has been configured, not just files copied to the file system by the Storage Manager. To maximize the licensed Storage Manager capacity, the storage disk file systems should be restricted to Storage Manager data only. If your storage disk contains ‘user’ data you should consider moving that data to an alternate location prior to performing a StorNext upgrade.

If you are unsure about the location of the Storage Manager data on a file system run the command `fsdiskcfg` with no arguments. This command produces a report on the configured storage disks and the location of the managed data on each file system. The ‘Path’ column in the command output indicates the directory containing the managed data.

- **Replication:** Unlimited
- **Deduplication:** The number displayed is the size of the blockpool. The capacity is tracked to the nearest terabyte.
- **Vaulting:** Unlimited
- **Storage Disk:** Unlimited
- **Checksum:** Unlimited
- **Distributed Data Mover (DDM):** The number displayed is the maximum number of clients that can be used to run mover processes.
- **Failover (HA):** Unlimited

- **Maintenance:** The date displayed is when your Maintenance license expires. You cannot upgrade to a version of software whose release date is later than the Maintenance license expiration date. You can, however, upgrade if the release date is *prior* to your expiration date.

For example, if your maintenance license expires in December, 2010 and a new version of StorNext is released in November 2010, you can upgrade to this new version at any time, even if you don't get around to upgrading until some time in 2011.
- **Archive Conversion:** Unlimited

Determining License Capacity

The numbers displayed on the StorNext License screen represent *licensed capacity*, not necessarily *actual capacity*. You can determine the actual capacity for the File System, LAN Clients, Deduplication, Replication, Failover and Maintenance licenses by running the following command from the command line:

```
# snlicense -v <license type>
```

When running this command, do not use capital letters or include the angled brackets around the license type.

To obtain capacities for the Storage Manager, Vaulting, Storage Disk, Checksum, DDM and Maintenance features, run the following command from the command line:

```
# sntsm -l -v <feature name>
```

Note that character after the dash in the preceding command is the letter L, not the numeral 1. As before, when running this command do not use capital letters or include the angled brackets around the feature name.

For more information, see the man pages for both of these commands.

Updating Licenses

You will need to update a license if the license expires or if your configuration changes (for example, if you add additional clients or increase capacity.)

To update a license, select the desired product/feature and then click **Enter/Update**. When the **Configuration > Licenses > Enter/Update**

screen appears, copy the license string you received from Quantum into the [License/Feature Name] License field, and then click **Apply**.

Licensing and Upgrades

The new licensing implementation affects StorNext upgrades, both for release 4.1.1 and future releases. Be aware of the following upgrade-related implications and plan accordingly:

- A non-expired Maintenance license is required to perform a StorNext upgrade. This means you must contact Quantum Technical Support for a Maintenance license before you can upgrade to StorNext 4.1.1.
- The Maintenance license provided by Quantum Technical Support must be put into place prior to the upgrade, or you will not be allowed to proceed with the upgrade. This step is done by manually editing the `license.dat` file because the StorNext GUI has not been installed and therefore you cannot enter licenses through the GUI. This applies to upgrades to StorNext 4.1.1 and also to future upgrades.
- For future upgrades, for any StorNext feature or component currently in use, you must have a license in place prior to the upgrade. Otherwise, you will not be allowed to proceed with the upgrade.
- For future upgrades, after an upgrade you will still be allowed to run StorNext if the Maintenance license expires. However, no future upgrades will be allowed.
- The Maintenance license must remain in place even after expiration to allow the StorNext software to run, because it indicates which version of the software was purchased.
- If you are ready to upgrade and then notice that the Storage Manager capacity has been exceeded, you can follow the procedure below to free up capacity to bring it under the licensed value. These steps will clean up “dead space” on tape media, and do not apply to storage disks.

- 1 Run the `fsmedcopy` command with no arguments. Running command generates a report of media and wasted space. The report looks similar to this:

```
% fsmedcopy
```

```
-----  
Media Fragmentation Report   hu Feb  4 15:18:14 2010  
  
Media ID           Fill Level      Wasted Space  
-----  
000099             10.00           0.00  
000098             30.00           5.00  
000096             70.99           44.98  
000095             0.12            99.65
```

The “Fill Level” column shows how full the media is. The “Wasted Space” column indicates how much of the used space is wasted, NOT the percentage of the entire tape.

Media with high percentages for both values (such as media 000096 in the example) are good candidates for eliminating dead space.

- 2 For each media you identify as having significant dead space, run this command:

```
% fsmedcopy -r <mediaid>
```

Note: On a large system, the `fsmedcopy` report can take a long time to complete. If your site is dynamic (that is, it has a lot of file removes and updates,) you can skip step 1 and just pick media you know are full, and then run the command `fsmedcopy -r` against those media.

Manually Editing the license.dat File

If you choose to manually edit the `license.dat` file instead of using the StorNext GUI, in order to reflect any manual changes to the `license.dat` file you must navigate to the license page in the StorNext GUI. Doing so will ‘re-read’ the license file and allow access to previously disabled sections. If changes are not recognized and the licenses are not updated immediately, click the **Refresh** button.

Step 3: Name Servers

This screen enables you to manage machines acting as File System name servers. These machine names are copied into the StorNext `fsnameservers` file, which specifies machines serving as File System Name Server coordinator(s). The File System Name Server coordinator is a critical component of the StorNext File System Services (FSS).

A principal function of the coordinator is to manage failover voting in a high-availability configuration. Therefore, it is critical to select highly reliable systems as coordinators. Redundancy is provided by listing multiple machine entries in the `fsnameservers` file, one entry per line. The first machine listed is the primary coordinator and any subsequent machines listed serve as backup coordinators. To create redundancy, it is recommended that you list two machines. Typically, the selected systems are also configured for FSM services, but this is not a requirement.

If the `fsnameservers` file does not exist, then the file system operates as a local file system, requiring both a client and a server. The file system will not communicate with any other StorNext File System product on the network, thus eliminating the sharing of the FSS over the SAN.

Multiple `fsnameserver` Hosts

You should be aware that having multiple hosts in the `fsnameservers` file could have performance implications, possibly severe.

To help you weigh the benefits versus disadvantages of having multiple name server hosts, here are some points to consider:

- Metadata controllers needn't be name servers.
- Name servers needn't be MDCs.
- Each additional `fsnameserver` entry adds additional heartbeats from every file system host.
- If multiple metadata networks service an individual file system, each network must have an `fsnameserver` interface. Each `fsnameserver` host must have network interface(s) on every metadata network, and each interface must be listed in the `fsnameserver` file.

- Every host attempts to heartbeat every `fsnameserver` entry twice per second. Each heartbeat is limited to 32kB. This can add substantial traffic to a network.
- Each `fsnameserver` sends one reply to every host twice/second.

Calculating Network Requirements

The following example may help you understand how to calculate computing requirements for multiple name servers.

- 1 Every client sends a packet ($\leq 32\text{kB}$) to every name server address, twice per second, regardless of whether the `fsnameserver` is up or not. That is, total heartbeat traffic $\leq \# \text{ of clients} * \# \text{ of name servers} * 2 \text{ heartbeat-packets/sec} * 32\text{kB}/\text{packet}$. The size of the packet is determined by the number of file systems, the number of local FSMs, and so on.

For example, if the name servers are the FSMs, a simple network of 2 name servers, 2 FSMs, and six additional clients will heartbeat traffic of up to $8 \text{ hosts} * 2 \text{ reply packets/sec} * 32\text{kB} = 512\text{kB/sec} = 1/2 \text{ MB/sec} = 4\text{Mb/sec}$.

- 2 Every running name server sends a reply packet to every client host, twice per second. In the example above, the heartbeat reply packet count will be identical to the heartbeat traffic: $8 \text{ hosts} * 2 \text{ replies/sec} * 2 \text{ fsnameservers} = 32\text{kB/sec} \leq 512\text{kB/sec} = 4 \text{ Mb/sec}$.

In this example, total heartbeat traffic is no more than 1MB/sec or 8Mb/sec. In a more complicated example, these numbers can grow substantially. Picking a configuration with two dedicated name servers and three metadata networks, the `fsnameservers` file will have six entries: two name servers, each with three network interfaces. If there are 48 client and server hosts (plus the two dedicated name servers), then:

Heartbeat traffic $\leq 6 \text{ name server addresses} * 50 \text{ clients} * 2 \text{ heartbeat packets/sec} * 32\text{kB} = 19.2 \text{ MB/sec} = 153.6 \text{ Mb/sec}$. Reply traffic is somewhat less, $2 \text{ name servers} * 50 \text{ clients} * 2 \text{ reply packets/sec} * 32\text{kB} = 6.4 \text{ MB/sec} = 51.2 \text{ Mb/sec}$.

This comes to a total of 25.6MB/sec or 204.8 Mb/sec, which should be divided evenly between the name servers, and will be divided in some fashion between the three networks and six name server interfaces, depending on host/network connectivity.


As a general rule, Quantum recommends having no more than two fsnameservers without first computing total traffic.

Entering Name Servers

Follow these steps to add a name server:

- 1 When the Configuration Wizard is displayed, choose **Name Servers** on the left side of the screen. (Alternatively, choose **Name Servers** from the **Configuration** menu.) The **Configuration > Name Servers** screen appears. (If name servers were previously created, a list of those IP addresses appears on the Name Servers screen.)

Figure 8 Name Servers Screen

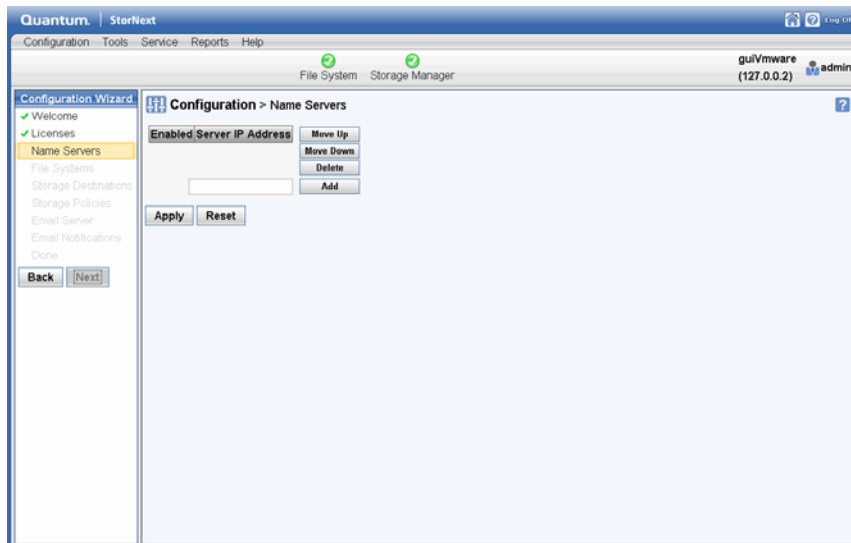

- 2 To add a new name server, enter the IP address in the field to the left of the **Add** button. The new name server appears in the list of available name servers.
- 3 Click **Apply** to use the name server specified.
- 4 When the confirmation message warns you that changing the name server is a cluster-wide event, click **Yes** to continue or **No** to abort.
- 5 After you click **Yes**, a message informs you that Name Servers has been updated. Click **OK** to continue.

- 6 If there are previously configured name servers, you can specify the order in which name servers are used. To set the order, select a server and then click **Move Up** or **Move Down** until the selected server is in the correct order.

A green check mark icon under the **Enabled** column heading indicates that the server is currently enabled as a name server. A red X icon indicates that the server is not currently enabled.

Deleting a Name Server

To delete a name server, select the name server you want to delete and then click **Delete**. Finalize the deletion by clicking **Apply**.

Step 4: File Systems


After entering license information, the next task is to create a file system. When you reach this step, any previously created file systems are displayed.

The following procedure describes the easiest way to create a new file system quickly so you can complete the Configuration Wizard tasks and begin using StorNext immediately. For more detailed information about file systems such as editing, modifying or deleting existing file systems or performing additional file system actions, see [File System Tasks](#) on page 69.

- 1 When the Configuration Wizard is displayed, choose **File Systems** on the left side of the screen. (Alternatively, choose **File Systems** from the **Configuration** menu.) The **Configuration > File Systems** screen displays all currently configured file systems. (If you are running the Configuration Wizard for the first time, there will be no existing file systems.)


From this screen you can view, add, edit, or delete a file system. For information on these procedures, see the online help.

Figure 9 Configuration > File System Screen

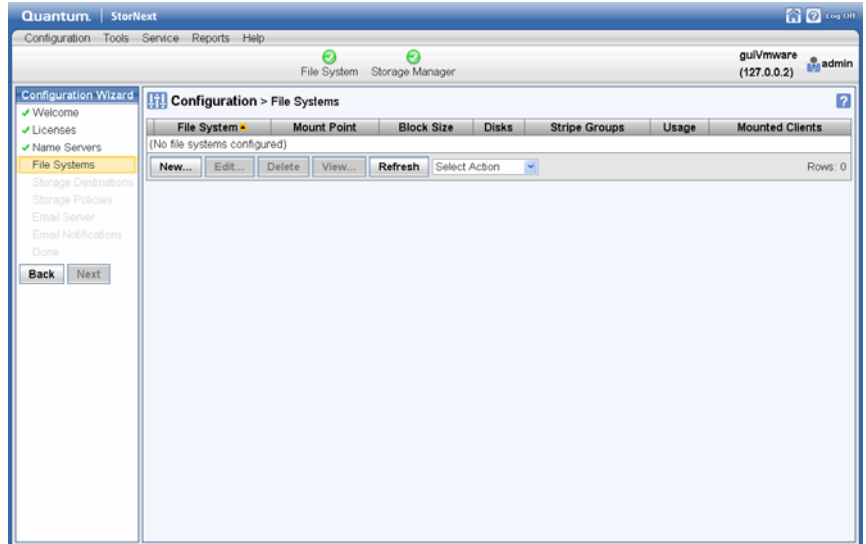

- 2 Click **New** to add a new file system. The **Configuration > File Systems > New** Screen appears.

Figure 10 Configuration > File System > New Screen

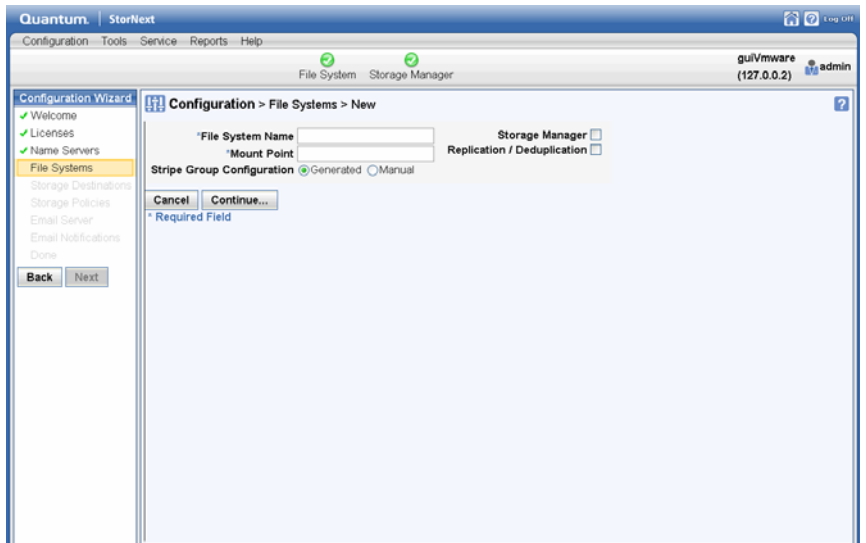

3 Enter the following fields:


- **File System Name**
- **Mount Point**
- **Storage Manager**
- **Replication/Deduplication**
- **Stripe Group Configuration: Generated or Manual**

(For detailed information about what to enter on this screen, see the online help.)

If you chose Manual Configuration, skip to [Manual Configuration](#).

4 Click **Continue** to proceed to the second configuration screen.

Figure 11 Configuration > File System > New Screen 2

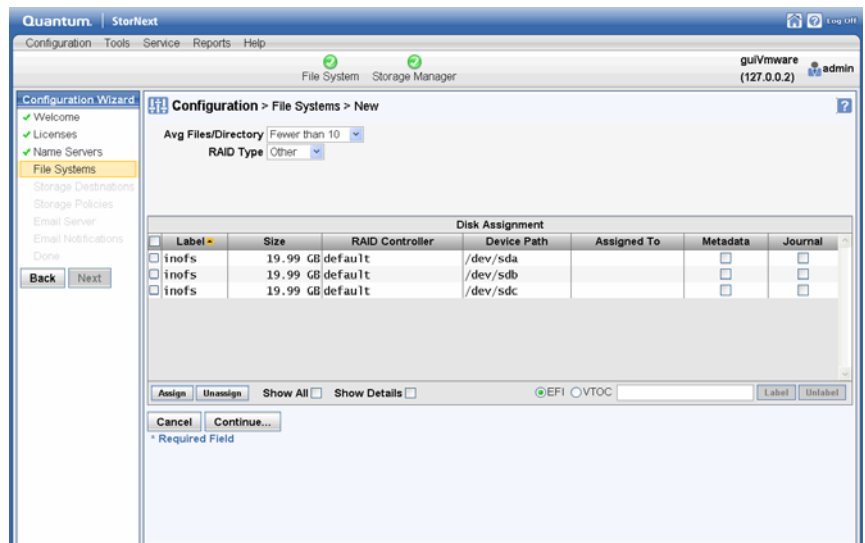


5 At the **Avg Files/Directory** field, select one of the options to indicate the approximate average number of files per directory you anticipate the new file system will contain. Options range from fewer than 10 files to more than 1000 files.

This value helps StorNext calculate capacity. You should select the option that most closely corresponds to your projected usage. You are not limited by the option you select. For example, if you indicate

that there will typically be fewer than 10 files per directory, there is nothing to prevent the directory from containing more than 10 files.

- 6 At the **RAID Type** field, select the type of RAID the file system uses.
- 7 Select one or more disks to assign to the file system.
- 8 After selecting one or more disks, click the **Metadata** checkbox to designate the disk(s) as used for metadata, or click the **Journal** checkbox to use the disk(s) for journaling. A disk can be used for both metadata and journaling.
- 9 At the field to the left of the **Label** button, enter a disk label name. Click **Label** to apply the label name to the selected disks. (Clicking **Unlabel** removes label names from selected disks.) When asked to confirm the action (either Label or Unlabel), click **OK** to continue or **Cancel** to abort.
- 10 After you are finished entering label information, click **Assign** to assign the disk(s) to the file system. (Clicking **Unassign** removes any existing associations between disks and the file system. For example, if you assign disks erroneously, clicking Unassign is an easy way to remove associations and reassign disks.)
- 11 Click **Continue**.

Figure 12 Configuration > File System > New Screen 3

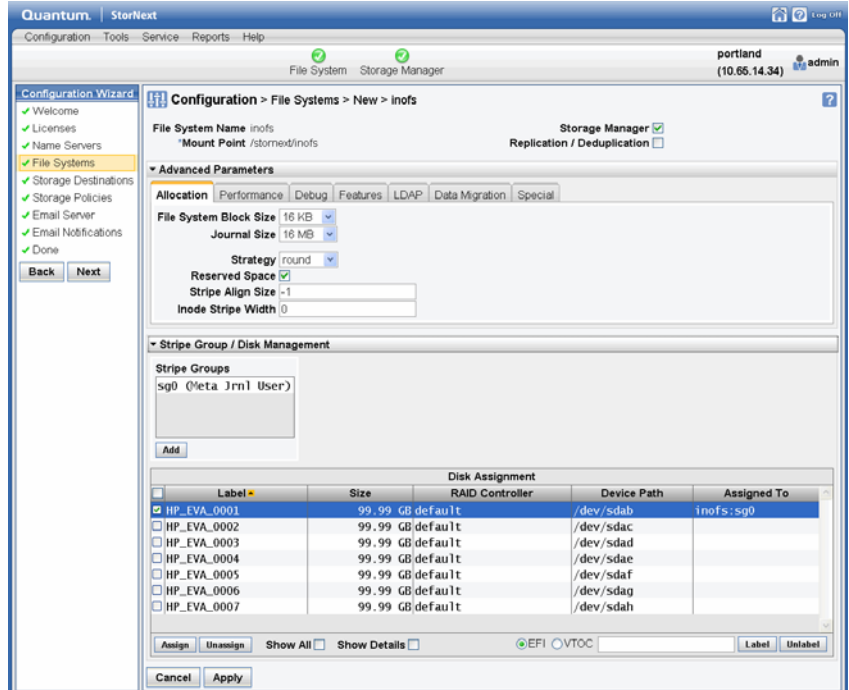


- 12 Click the arrows beside the headings **Advanced Parameters** and **Stripe Group/Disk Management** to display that information. If desired, make any changes in these areas.
- 13 When you are satisfied with the file system parameters, click **Apply**. StorNext automatically configures and mounts the file system based on the information you entered.

Manual Configuration

If you chose Manual Configuration, you must enter the fields on the **Advanced Parameters** tabs and the **Stripe Group/Disk Management** fields. (Click the arrow to the left of these headings to display the tabs and fields.)

Figure 13 Configuration > File System > New Screen 3

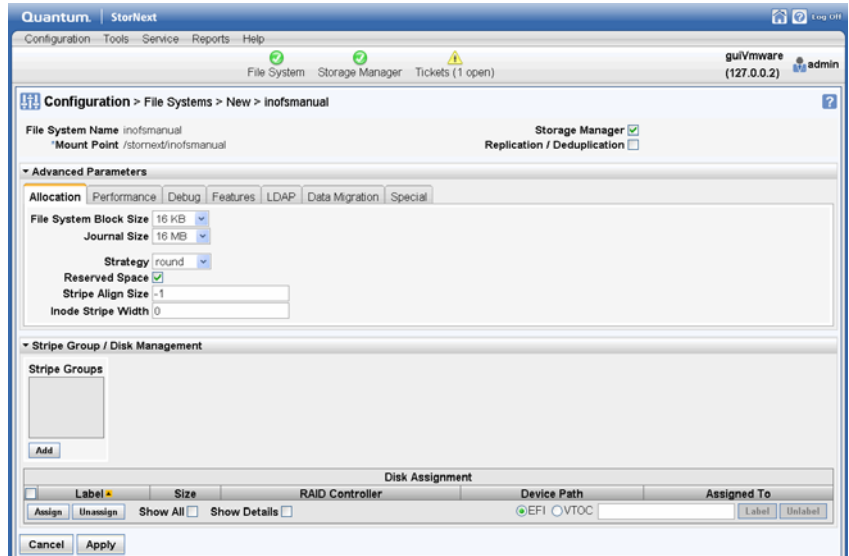

For information about entering these tabs and fields, see the online help.

- 1 When you are finished entering Advanced Parameter and Stripe Group/Disk Management information for the manually configured file system, click **Apply** to save your changes and create the file system.
- 2 When a message informs you that the file system was successfully created, click **OK**.

Editing a File System and Performing Other Actions

Once you have created a file system, you have the option of editing the file system or performing one of the following actions:

Stop or start the file system	Update the file system
Start and activate the file system	Perform a metadata dump for the file system
Start and mount the file system	Check the file system

Activate the file system	Expand the file system Note: StorNext does not support expansion on stripe groups containing mixed-sized LUNs. For example, if you create a file system that has two different-sized disks in a userdata only stripe group and then attempt to add a new disk to that stripe group and expand it, the expansion will fail.
Mount or unmount the file system	Migrate the file system
Make the file system	

Refer to the StorNext online help for instruction on editing a file system or performing one of the available actions.

Step 5: Storage Destinations

After you have created at least one file system, the Configuration menu's Storage Destinations option allows you to add, edit, or delete libraries and storage disks. You can also enter or edit targets for data replication, and specify a blockpool host file system for data deduplication.


Adding a New Library

Follow this procedure to add a new library:

- 1 When the Configuration Wizard is displayed, choose **Storage Destinations** on the left side of the screen. (Alternatively, choose **Storage Destinations** from the **Configuration** menu.)


- 2 If necessary, click the **Library** tab. The **Configuration > Storage Destinations > Library** Screen appears.

Figure 14 Storage Destinations
> Library Screen

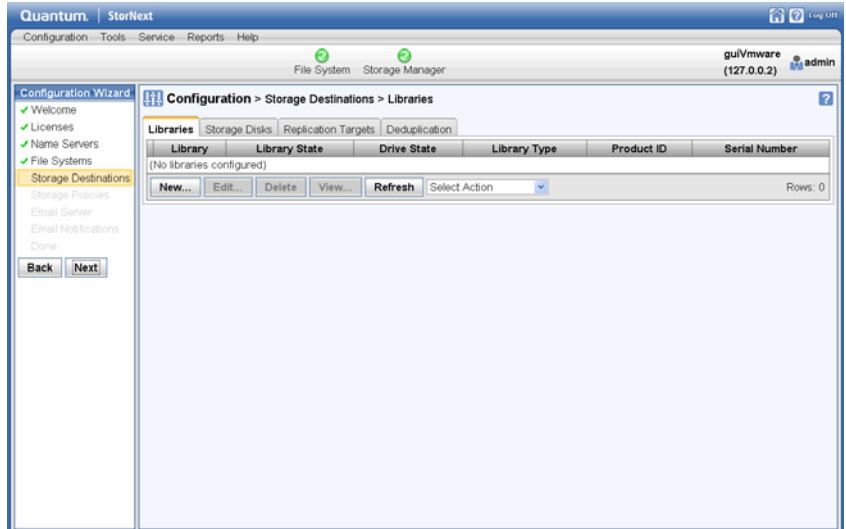

- 3 Click **New**. The **Configuration > Storage Destinations > Library > New** Screen appears.

Figure 15 Storage Destinations
> Library > New Screen

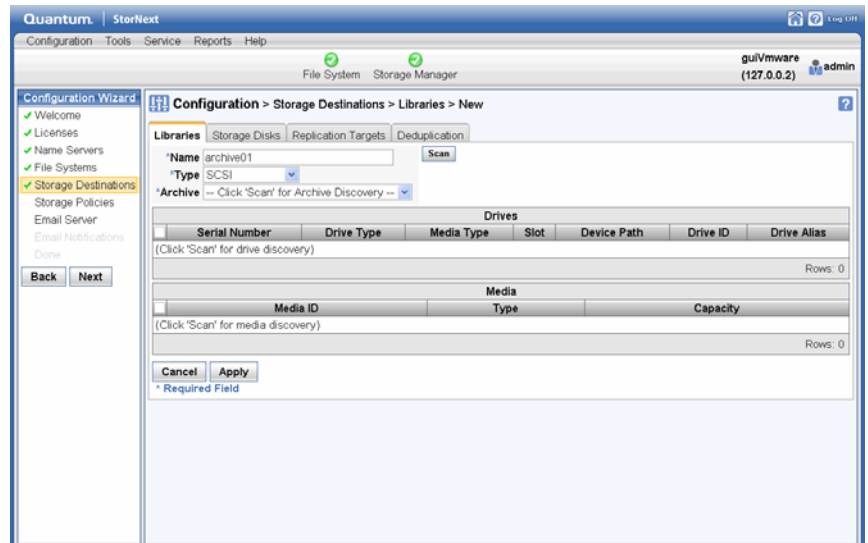


- 4 Enter the fields at the top of the screen. (For detailed information about what to enter on this screen, see the online help.)
- 5 In the **Drives** section, select a tape drive to add to your new library, or click **Scan** to have StorNext discover available drives for you.
- 6 In the **Media** section, view media available for use. (Click **Scan** to have StorNext discover available media for you.)
- 7 Click **Apply**.
- 8 After a message informs you that the library was successfully created, click **OK**.
- 9 Repeat steps 3 - 8 to add additional tape drives and media to the new library.

Viewing an Existing Library

Follow this procedure to view details for a previously created library:

- 1 Choose **Storage Destinations** from the **Configuration** menu. If necessary, click the **Library** tab. The **Configuration > Storage Destinations > Library** screen appears. (See [Figure 14.](#))
- 2 Select the library whose information you want to view.
- 3 Click **View**, or choose **View** from the actions dropdown list. The library detail screen appears.

Figure 16 Library Details Screen

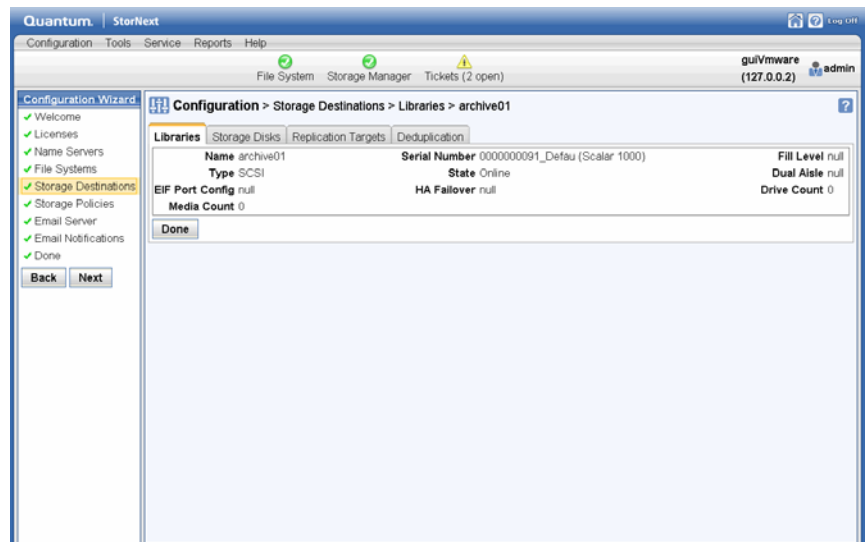

4 The library information screen provides the following information:

- **Name:** The name of the library
- **Serial Number:** The library's serial number
- **Fill Level:** The library's current fill level
- **Type:** The type of library (e.g., SCSI, ACSLS, etc.)
- **State:** The library's current state (e.g., online or offline)
- **Dual Aisle:** Indicates whether the library has a dual aisle configuration

- **EIF Port Config:** The current EIF port configuration. EIF stands for Enterprise Instrumentation Framework, and it helps StorNext process data from applications on the server.
- **HA Failover:** Indicates whether HA failover is enabled for the library
- **Drive Count:** The number of tape drives in the library
- **Media Count:** The number of media in the library


5 When you are finished viewing library information, click **Done**.

Editing a Library

Follow this procedure to edit parameters for an existing library:

- 1 If you have not already done so, choose **Storage Destinations** from the **Configuration** menu and then click the **Library** tab.
- 2 Select the library you want to edit.
- 3 Click **Edit**, or choose **Edit** from the actions dropdown list. After you select this option StorNext scans the library, which could take some time to complete depending on your configuration.

Figure 17 Edit Library Screen

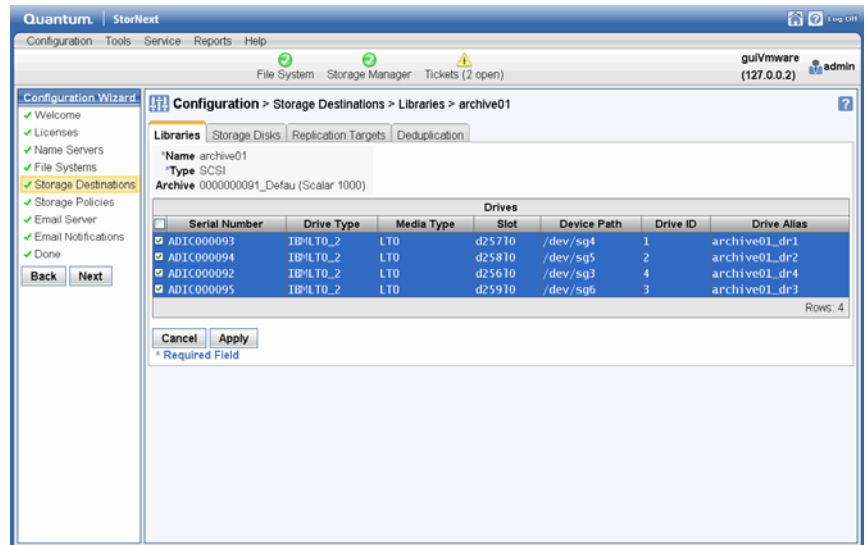

- 4 If desired, click **Scan** if you want StorNext to scan the library for drives.
- 5 Select the tape drives you want included in your library, or click **All** to include all available tape drives. (To exclude all drives, click **None**.)
- 6 Click **Apply**.
- 7 When a confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 8 After a message informs you that the library was successfully modified, click **OK**.

Deleting a Library

Follow this procedure to delete an existing library:

- 1 If you have not already done so, choose **Storage Destinations** from the **Configuration** menu and then click the **Library** tab.
- 2 Select the library you want to delete.
- 3 Click **Delete**, or choose **Delete** from the actions dropdown list.
- 4 When a confirmation message appears, click **Yes** to proceed with the deletion or **No** to abort.
- 5 After a message informs you that the library was successfully deleted, click **OK**.

Performing Other Library Actions

Towards the middle of the **Configuration > Storage Destinations > Library** screen is a dropdown list of actions you can perform for libraries.

Select the library for which you want to perform the action, and then choose one of these options from the **Select Action** dropdown list:

- **Audit**: Select this option to perform an audit on the selected library. An audit is a physical check of each library component to verify its integrity and make sure the database and library are synchronized. Quantum recommends periodic audits on the library to ensure synchronization.
- **Remap-Audit**: This option synchronizes the StorNext databases with the library databases.
- **Online**: Select this option to set the library online.

- **Offline:** Select this option to take the library offline.
- **Drives Online:** Select this option to place the drives in the library online.
- **Drives Offline:** Select this option to take the drives in the library offline.
- **Add Media Bulkload:** Select this option to add media to the library via the bulk loading method.
- **Add Media Mailbox:** Select this option to add media to the library through the library's mailbox.

Storage Disk Overview

Storage disks are external devices on UNIX-based file systems that can be used for long term data storage. Storage disks function and operate the same way as physical tape media.

When a storage disk is configured, the StorNext Storage Manager moves data to storage disks for long-term retention in addition to or instead of tape. This enables users to leverage the specialized third-party functionality of appliances or store small files that might take longer to retrieve from tape. Many users will still use tape for long-term storage and vaulting, but storage disk can be used to create tape-free archives.

Here are a few differences storage disks have over tape media:

- A storage disk either belongs to no policy class, or belongs to a single policy class
- A storage disk can store file copies only with the same copy ID.

Note: Before you create a storage disk, the disks you plan to use must reside in an existing, mounted file system.

After you create a storage disk, observe the following usage recommendations:

- If your file system includes storage disks, avoid using that file system for any data other than storage disk stored data.
- Use complete and physically dedicated file systems (snfs, local, NFS, or other) for storage disk data, not shared file systems or file systems with linked directories.
- If your file system includes storage disks and you accidentally fill it with unrelated user data (i.e., non-storage disk data), call the

Quantum Technical Assistance Center and ask for a procedure to clean up and transcribe data.

The following procedures describe how to view, edit and delete storage disks. The procedure for adding a storage disk is identical to entering one through the StorNext Configuration Wizard as described in [Adding a New Storage Disk](#) on page 47.)


Caution: Storage disks can be an important and integral part of your system, but you should NEVER rely solely on storage disks as your only backup location.

Adding a New Storage Disk

Follow this procedure to add a new storage disk.


- 1 Click the **Storage Disk** tab. The **Configuration > Storage Destinations > Storage Disk** Screen appears.

Figure 18 Configuration > Storage Destinations > Storage Disk Screen

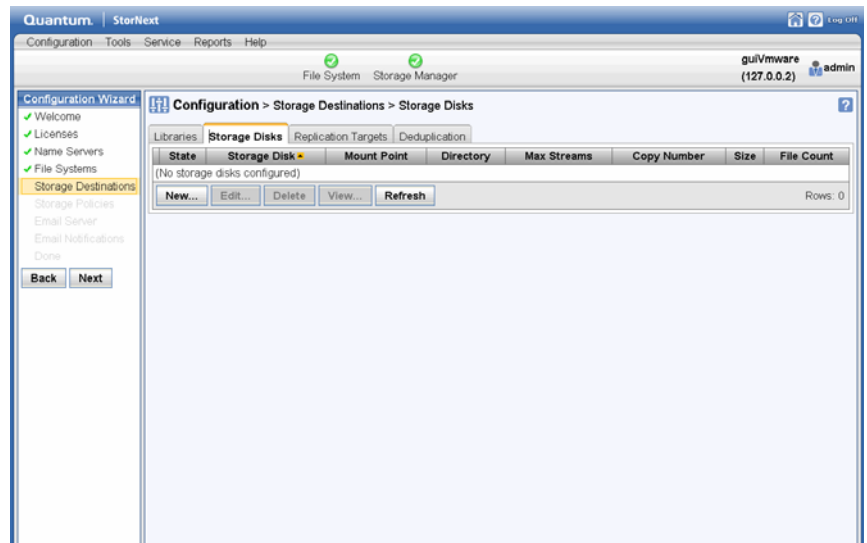

- 2 Click **New**. The **Storage Destinations > Storage Disk > New** Screen appears.

Figure 19 Storage Destinations
> Storage Disk > New Screen

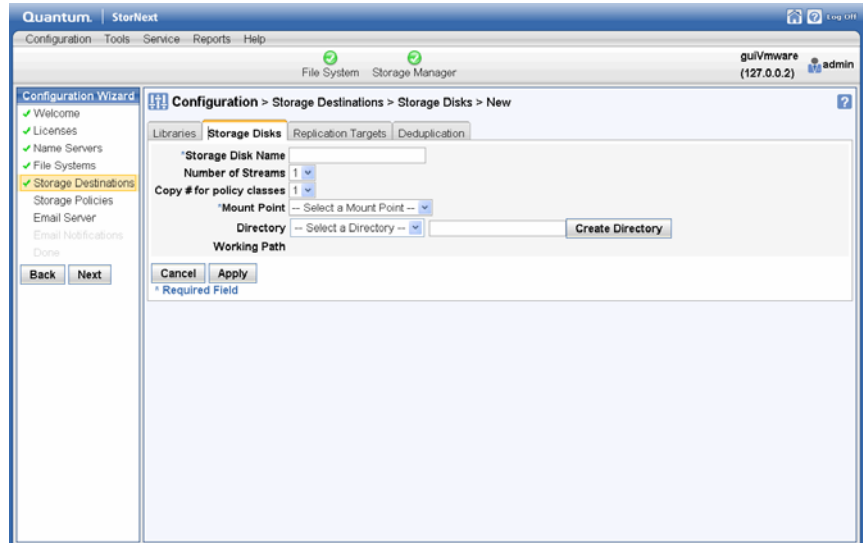

- 3 Enter the fields on the screen. (For detailed information about what to enter on this screen, see the online help.)
- 4 Click **Apply**.
- 5 Repeat steps 2 - 4 to add additional storage disks.


Viewing an Existing Storage Disks

Follow this procedure to view a list of previously configured storage disks.

- 1 Choose **Storage Destinations** from the **Configuration** menu.
- 2 Click the **Storage Disk** tab. Any previously configured storage disks are displayed. (See [Figure 18](#) on page 47.)
- 3 Select the storage disk whose information you want to view.

4 Click **View**.

Figure 20 View Storage Disk Screen

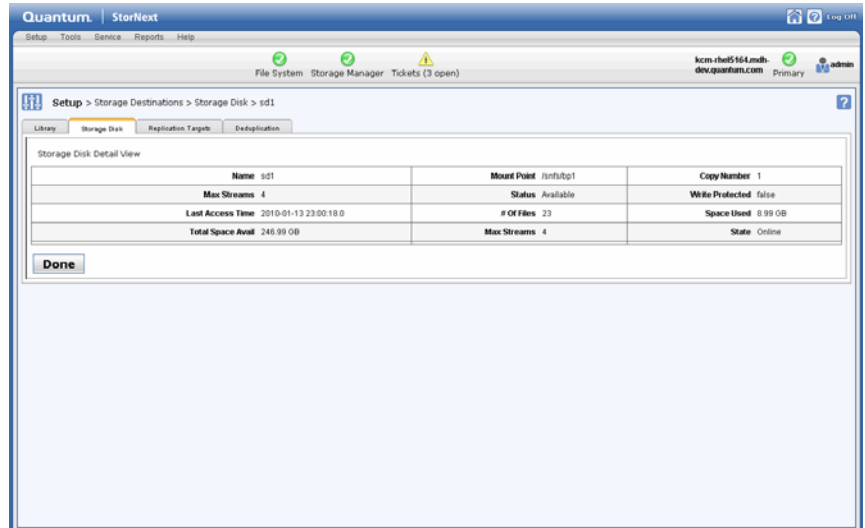

5 When you are finished viewing library information, click **Done**.

Editing a Storage Disk

Follow this procedure to edit a currently configured storage disk.

- 1 If you have not already done so, choose **Storage Destinations** from the **Configuration** menu and then click the **Storage Disk** tab.
- 2 Select the storage disk whose information you want to edit.
- 3 Click **Edit**.
- 4 Modify any of the fields you entered when creating the storage disk. (For field information, see the online help or the descriptions in [Adding a New Storage Disk](#) on page 47.)
- 5 Click **Apply**.
- 6 When a confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 7 After a message informs you that the storage disk was successfully modified, click **OK**.

Deleting a Storage Disk

Follow this procedure to delete a currently configured storage disk.

- 1 If you have not already done so, choose **Storage Destinations** from the **Configuration** menu and then click the **Storage Disk** tab.
- 2 Select the storage disk you want to delete.
- 3 Click **Delete**.
- 4 When a confirmation message appears, click **Yes** to proceed with the deletion or **No** to abort.
- 5 After a message informs you that the storage disk was successfully deleted, click **OK**.


Caution: Before deleting a storage disk, make sure the policies that refer to the storage disk (as well as the file systems that use the storage disk for backup storage) have been safely backed up and configured or updated to not use the storage disk you want to delete.

Adding a New Data Replication Host

The following procedure describes how to add a new replication target host. (For more information about the replication feature, see [Chapter 6, Replication and Deduplication](#) and [Appendix B, Additional Replication and Deduplication Information](#).)

- 1 Click the **Replication Targets** tab. The **Configuration > Storage Destinations > Replication / Deduplication** Screen appears.

Figure 21 Configuration >
Storage Destinations >
Replication / Deduplication
Screen

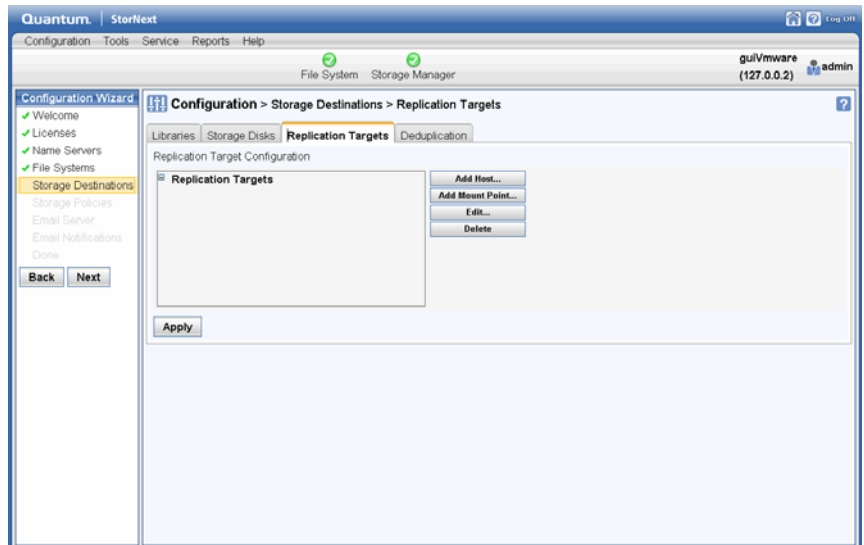

- 2 Click **Add Host**.
- 3 Enter the fields in the **New Target** section. (For detailed information about what to enter on this screen, see the online help.)
- 4 Click **Add** to add the new replication target, or **Cancel** to abort without saving.
- 5 Click **Apply** to save your changes.
- 6 Repeat steps 3 - 6 to add more targets.
- 7 After a message informs you that the target was successfully added, click **OK**.

Editing a Data Replication Host

Follow this procedure to edit an existing data replication target.

- 1 If you have not already done so, click the **Replication Targets** tab.
- 2 If necessary, click the plus sign (+) beside the **Replication Targets** heading in the box titled **Replication Target Configuration**.
- 3 Select the replication target you want to edit.
- 4 Click **Edit**.

- 5 At the **Hostname or IP** field, modify either the host name or IP address for the replication target.
- 6 Click **Update** to save your changes, or **Cancel** to abort.

Deleting a Data Replication Target

Follow this procedure to delete a replication target.

- 1 If you have not already done so, choose click the **Replication Targets** tab.
- 2 If necessary, click the plus sign (+) beside the **Replication Targets** heading in the box titled **Replication Target Configuration**.
- 3 Select the replication target you want to delete.
- 4 Click **Delete**.

Caution: There is no confirmation message for this delete function, so make absolutely certain you want to delete the replication target before you click **Delete**.

Adding a New Mount Point

Follow this procedure to add a new mount point to a replication target.

- 1 If you have not already done so, choose **Storage Destinations** on the left side of the screen. (Alternatively, choose **Storage Destinations** from the **Configuration** menu.)
- 2 Click the **Replication Targets** tab.
- 3 Select the replication target (host) to which you would like to add a mount point. (You might need to click the dash to the left of the **Replication Targets** heading to display the available hosts.)
- 4 Click **Add Mount Point**.
- 5 Click **Scan Host** to identify available mount points on the selected host.
- 6 At the **Mount Point** field, select a mount point and then click **Add**.
- 7 Repeat steps 3 - 6 to add additional mount points.
- 8 Click **Apply** to save the changes.

- 9 After a message informs you that changes were successfully incorporated click **OK**.


Enabling Data Deduplication

The **Deduplication** tab enables you to create a blockpool on a specified file system. (For more information about the deduplication feature, see [Chapter 6, Replication and Deduplication](#) and [Appendix B, Additional Replication and Deduplication Information](#).)

To create the blockpool, select the desired file system from the dropdown list next to the **Blockpool File System** label, and then click **Apply**.

Note: The blockpool should not be placed on a file system that will be used as the HA shared file system. This is a requirement even if you do not plan to use the StorNext Deduplication feature.

Figure 22 Configuration > Storage Destinations > Replication / Deduplication Screen (Blockpool)

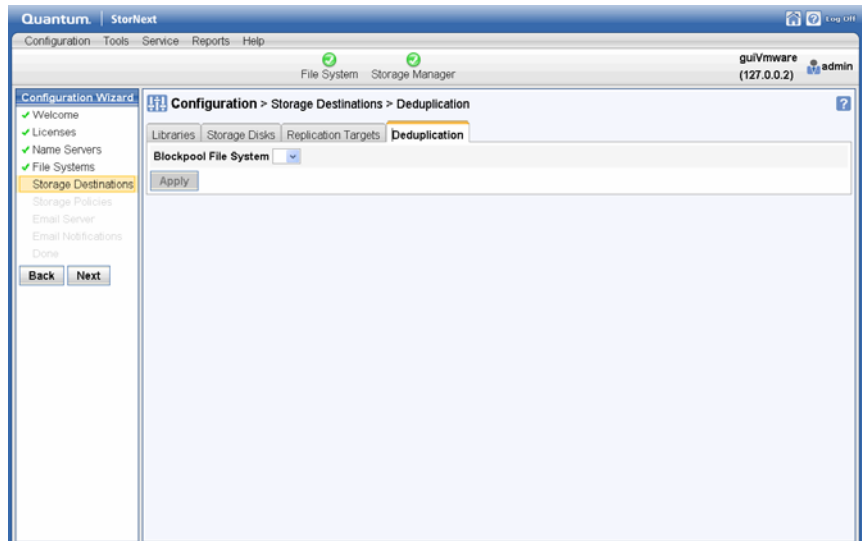

Step 6: Storage Policies

There are two kinds of storage policies: Storage Manager storage policies and Replication/Deduplication storage policies. Replication/Deduplication storage policies control the way StorNext's replication and deduplication features behave. (For more information about the replication and deduplication features, see [Chapter 6, Replication and Deduplication](#) and [Appendix B, Additional Replication and Deduplication Information](#).)

A Storage Manager storage policy defines how files will be managed in a directory and subdirectories. Specifically, these are the available Storage Manager storage policy settings:

- Number of copies to create
- Media type to use when storing data
- Amount of time to store data after data is modified
- If disk-to-disk relocation is enabled, the amount of time (in days) before relocating a file
- Amount of time before truncating a file after a file is modified

Storage policies can be related to one or more directories. In this situation, all files in that directory and sub-directories are governed by the storage policy.

Note: The connection between a storage policy and a directory is called the relation point.

Here are some examples of storage policy usage:

- A directory in which to store backups every night is created. This directory is seldom accessed after the files are copied over. A storage policy could be set up to create two tape copies of the files, store one copy of the files to LTO media after residing on disk for 10 minutes, and then truncate the other set of files immediately after storing the other set to tape in order to free up disk space. This policy can be associated with a directory such as: /sandsm/dsm1/backup.
- A directory has been created to store all documents that are accessed frequently, and if truncated, need to be retrieved quickly.


The in this case could be set up to create a single tape copy, store the files to LTO media 15 minutes after being on disk, and then truncate after 60 days of non-use. This policy can be associated with a directory such as: /sandsm/dsm1/docs.

Adding a Storage Manager Storage Policy

Follow this procedure to add a new Storage Manager storage policy:


- 1 When the Configuration Wizard is displayed, choose **Storage Policies** on the left side of the screen. (Alternatively, choose **Storage Policies** from the **Configuration** menu.) The **Configuration > Storage Policies** Screen appears.

Figure 23 Configuration > Storage Policies Screen

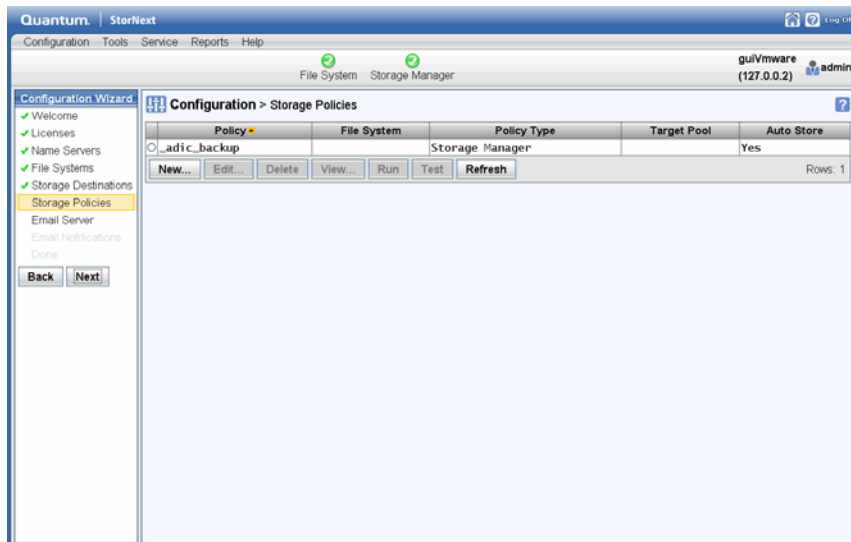

- 2 Click **New**. The **Storage Policies > New** Screen appears.

Figure 24 Storage Policies >
New Screen

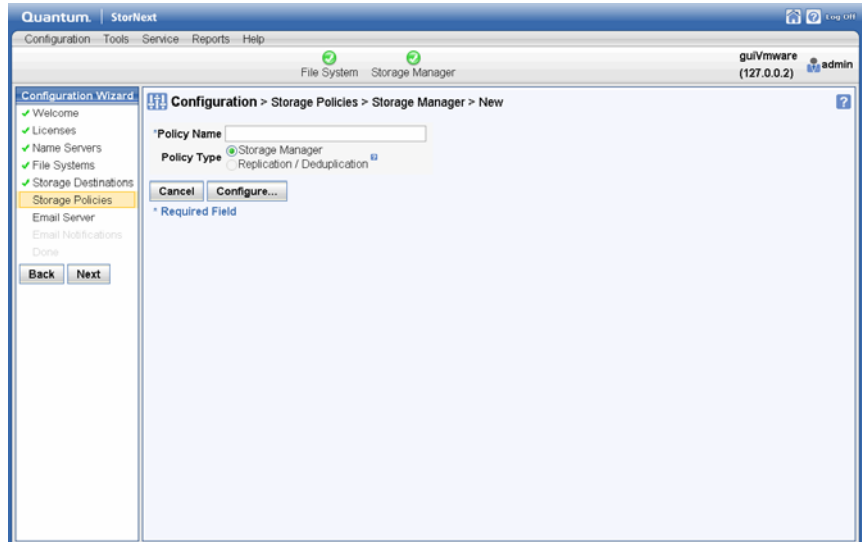

3 Enter the following fields:

- **Policy Name:** The name of the new policy you are creating
- **Policy Type:** choose **Storage Manager** to create a policy for StorNext Storage Manager
- Click **Configure** to continue.

4 Enter information on the **General**, **Relocation**, **Steering**, **Schedule** and **Associated Directories** tabs. (See the sections following for more information about these tabs.)


5 When you are finished entering information about the new policy, click **Apply**, or click **Cancel** to exit without saving.

6 After the Status screen informs you that the policy was created successfully, click **OK**.

The General Tab

The General tab contains parameters that apply to all storage policies. Fields marked with an asterisk are required. Enter additional fields as desired, or accept the displayed default values.

Figure 25 Storage Policies >
New > General Tab

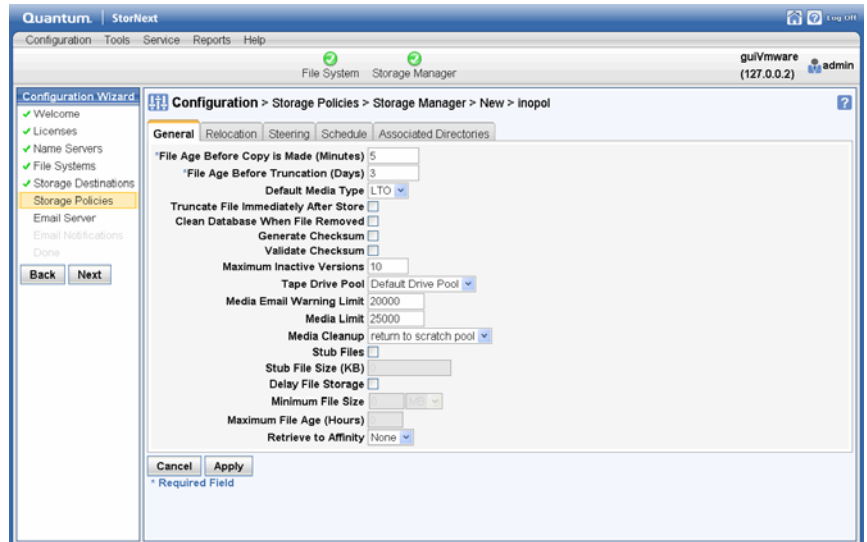


For instructions on what to enter on this screen, see the online help.

The Relocation Tab

The Relocation tab enables you to configure the Disk-to-Disk relocation feature.

Disk-to-Disk relocation allows you to move data from one set of disks (disk stripe group) to another without affecting the file name space.

Figure 26 Storage Policies >
New > Relocation Tab

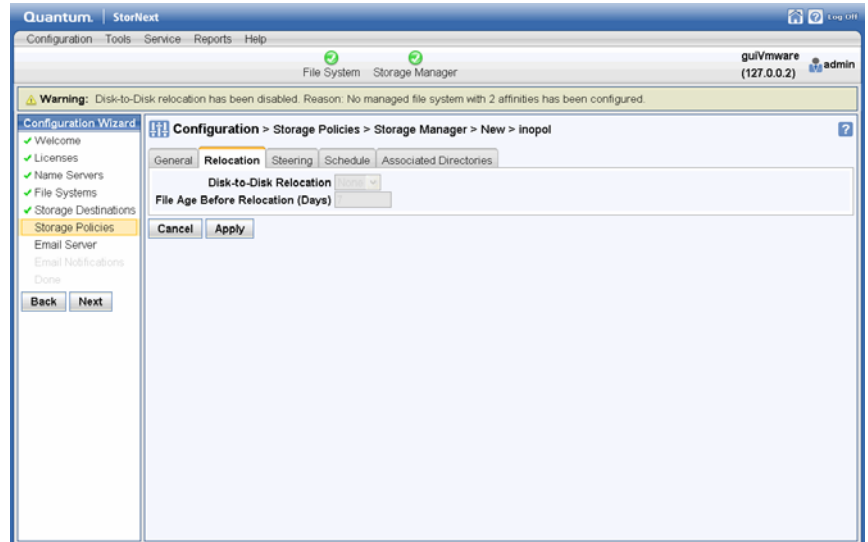


For instructions on what to enter on this screen, see the online help.

The Steering Tab

The Steering tab enables you to configure *file steering*, which allows you to direct a copy of a file to a designated drive pool. This is normally used when you want to direct two or more copies of a file to different archives by putting the tape drive in separate pools and then setting the copy number of the file to go to that pool. You can also use this feature to route your copies of the file to different media types, including storage disks.

Figure 27 Storage Policies >
New > Steering Tab

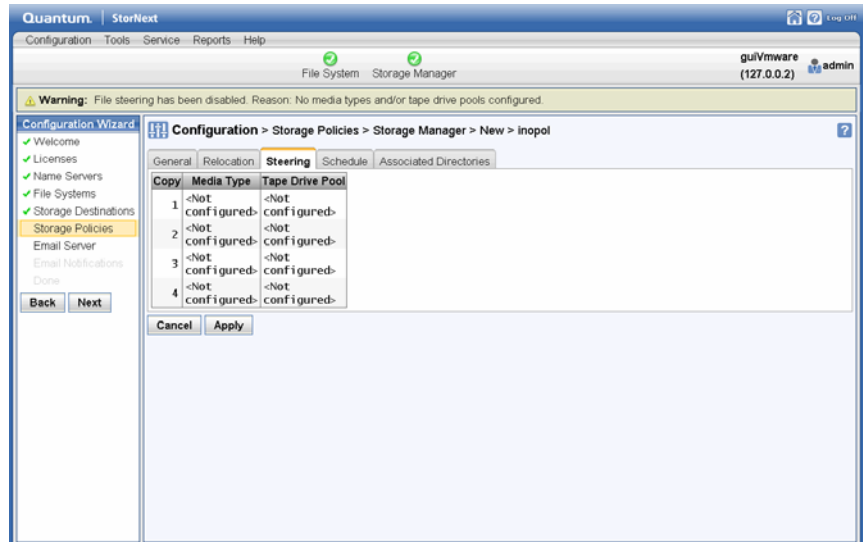


For instructions on what to enter on this screen, see the online help.

The Schedule Tab

The Schedule tab allows you to enable or disable the Store Files Automatically feature.

When this feature is enabled, StorNext automatically stores files for the current storage policy. If this feature is disabled, Quantum recommends that the files for the policy class be stored by scheduled events. (Scheduled events are certain activities which you can set up to run at specified times using StorNext's schedule. For more information, see [Scheduler](#) on page 111.)

Figure 28 Storage Policies >
New > Schedule Tab

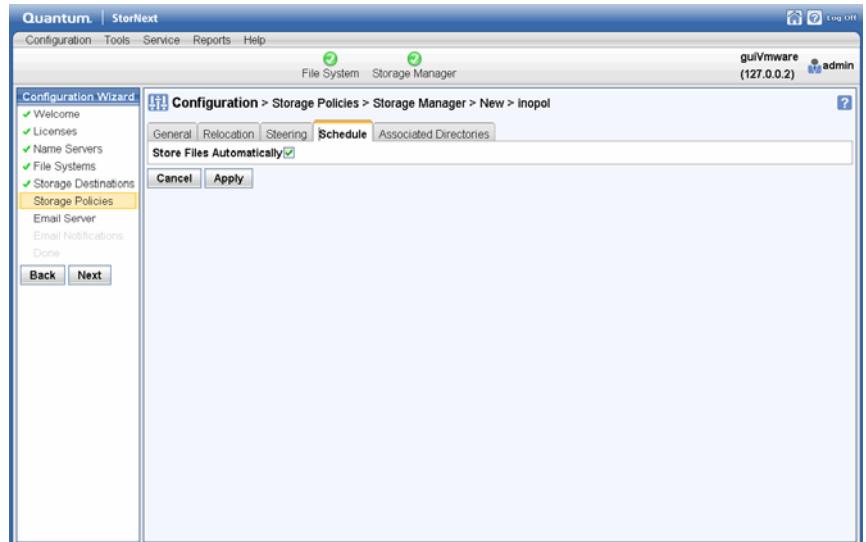


For instructions on what to enter on this screen, see the online help.

The Associated Directories Tab

The Associated Directories tab enables you to view or delete any existing associated directories in the file system for the policy, and to add new directories.

Figure 29 Storage Policies > New > Associated Directories Tab

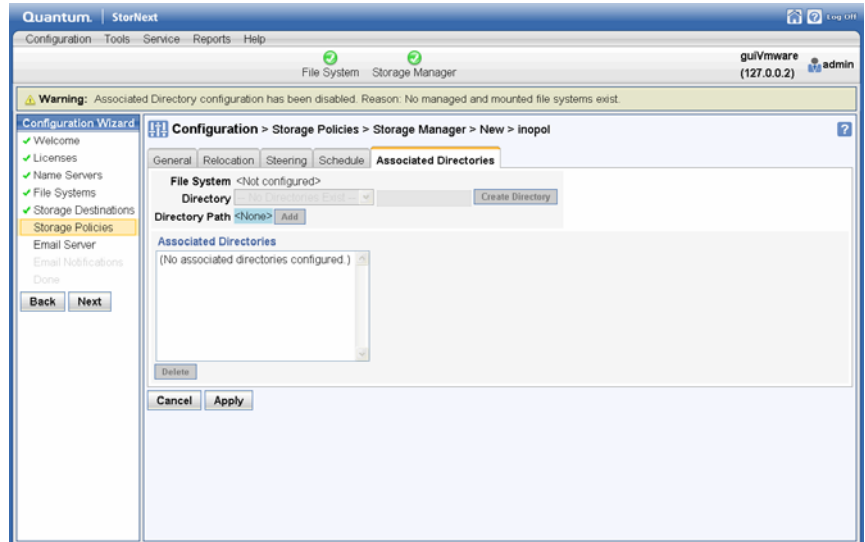

For instructions on what to enter on this screen, see the online help.

Adding a Replication Storage Policy


The steps for creating a replication storage policy are described in [Step 4: Create a Replication Storage Policy](#) on page 150.

Viewing a Storage Policy

To view storage policy details To view storage policy details for a Storage Manager or Replication policy, do the following:

- 1 From the **Configuration > Storage Policies** screen, select the storage policy you wish to view.
- 2 Click **View**.

Figure 30 View Storage Policies Screen

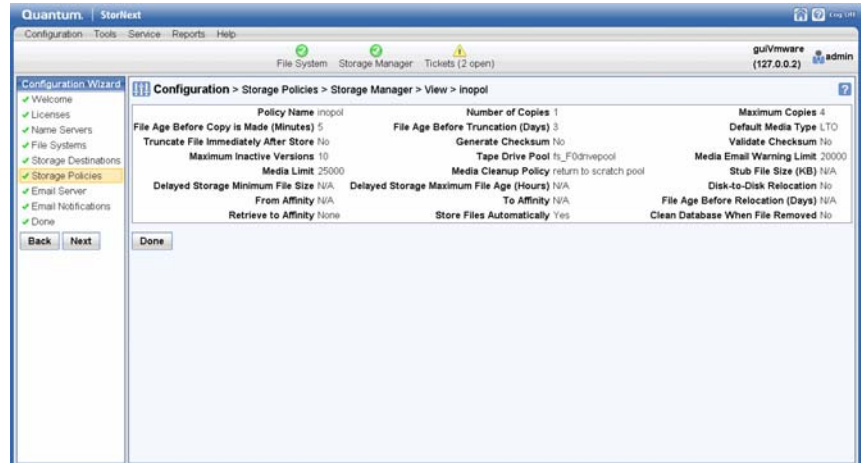

- 3 Click **Done** to return to the **Configuration > Storage Policies** screen.

Running a Storage Policy

Follow this procedure to run an existing storage policy.

- 1 If you have not already done so, choose **Storage Policies** from the **Configuration** menu.
- 2 Select the policy you want to run, and then click **Run**.
- 3 When a message informs you that the job was successfully initiated, click **OK** to continue.
- 4 To view job progress, select **Jobs** from the **Reports** menu.

Editing a Storage Policy

To edit an existing storage policy:

- 1 From the **Configuration > Storage Policies** screen, select the policy you wish to edit.
- 2 Click **Edit**.
- 3 Modify policy information as desired by clicking the tabs and editing or adding information. The process is the same as when you first created the policy.

If you are editing a Storage Manager policy, you can edit fields on the **General, Relocation, Steering, Schedule** and **Associated Directories** tabs. For more information about fields on these tabs, see the online help.

If you are editing a Replication global policy, you can edit fields on **Deduplication, Truncation, Outbound Replication, Inbound Replication**, and **Blackout** tabs. If you are editing a Replication target policy, you can modify field on only the **Inbound Replication** tab. For more information about fields on these tabs, see the online help.

- 4 Click **Apply** to save changes and return to the **Configuration > Storage Policies** screen, or **Cancel** to abort.

Deleting a Storage Policy

To delete an existing storage policy:

- 1 From the **Configuration > Storage Policies** screen, select the policy you wish to delete.
- 2 Click **Delete**.
- 3 Click **Yes** to confirm the deletion, or **No** to cancel.

Step 7: Email Server

The Email Server option allows you to specify the email server used for processing StorNext notification email messages. On this screen you will enter basic information such as the email server name and sending entity. You also have the option of sending a test message so you can verify that StorNext recognizes the email server whose information you entered.


Note: The Email Server option does not configure your email server. Instead, it allows you to specify a previously configured email server so StorNext knows which server is responsible for processing notification messages. Before you use the Email Server option, make sure your email SMTP server is already configured.

Adding an Email Server

Follow this procedure to add a new email server.

- 1 When the Configuration Wizard is displayed, choose **Email** on the left side of the screen. (Alternatively, choose **Email Server** from the **Configuration** menu.) The **Configuration > Email Server** Screen appears.

Figure 31 Configuration > Email Server Screen

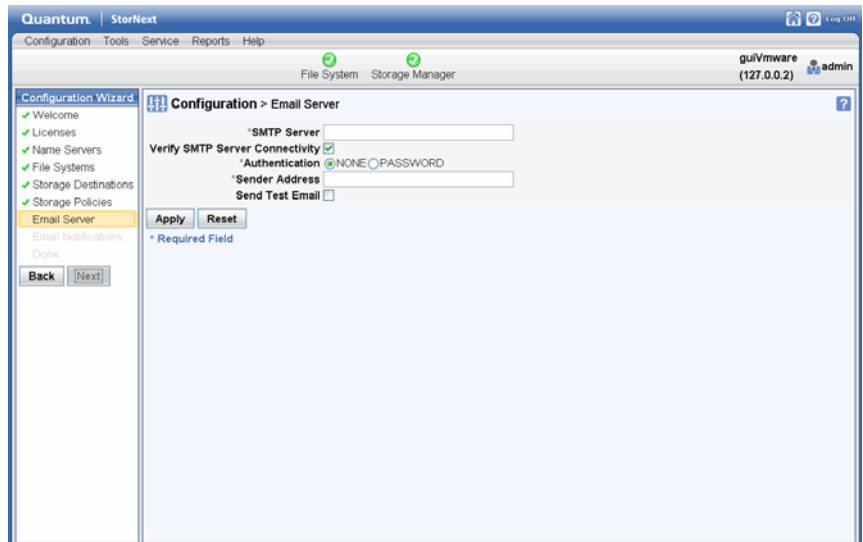

- 2 Complete the fields related to your email system configuration on the **Configuration > Email Server** screen. (For detailed information about what to enter on this screen, see the online help.)
- 3 Click **Apply** to save your changes.

Step 8: Email Notification

The Email Notification feature allows you to specify parties who should receive StorNext email messages about backup statuses, service tickets, admin alerts, and policy class messages.


Note: In order for this feature to work properly, make sure you have specified a configured email server as described in [Adding an Email Server](#) on page 64.

Adding an Email Recipient

Follow this procedure to add a new email recipient.


- 1 Choose **Email Notifications** from the **Configuration** menu.
- 2 When the Configuration Wizard is displayed, choose **Email Notifications** on the left side of the screen. (Alternatively, choose **Email Notifications** from the **Configuration** menu.) The **Configuration > Email Notifications** Screen appears.

Figure 32 Configuration > Email Notifications Screen

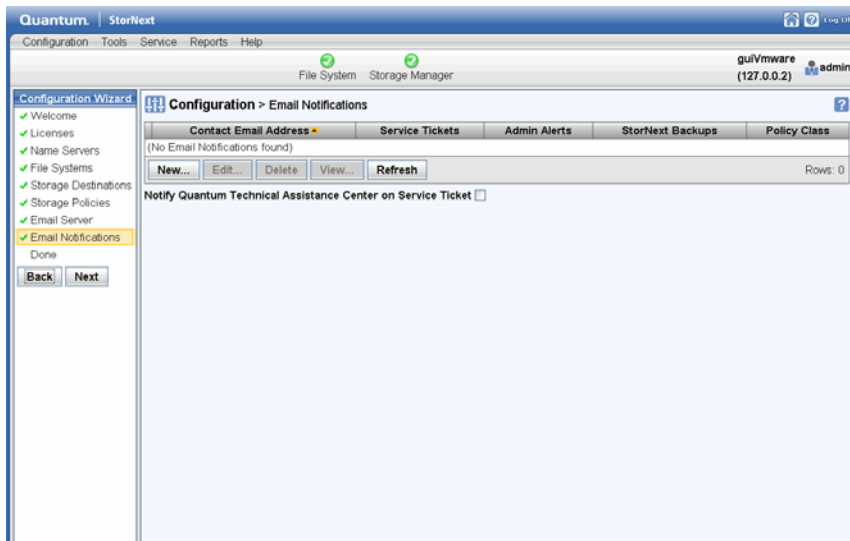

- 3 Click **New**. The **Configuration > Email Notifications > New** screen appears.

Figure 33 Configuration > Email Notifications New Screen

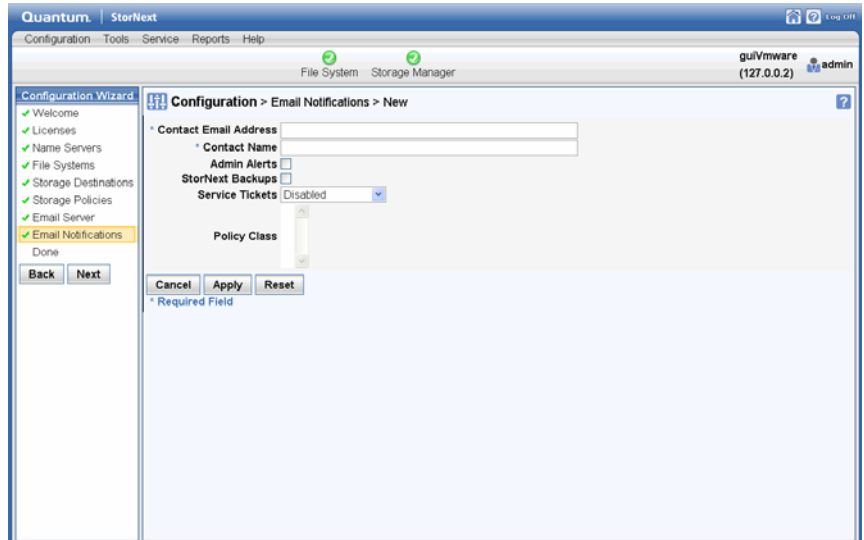

- 4 Complete the fields for the new email recipient. (For detailed information about what to enter on this screen, see the online help.)
- 5 Click **Apply** to save your changes.
- 6 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 7 When a message informs you that the email notification recipient was successfully added, click **OK** to return to the **Configuration > Email Notifications** screen.

Viewing Email Recipient Information

Follow this procedure to view details for an existing email recipient.

- 1 If you have not already done so, when the Configuration Wizard is displayed, choose **Email Notifications** on the left side of the screen. (Alternatively, choose **Email Notifications** from the **Configuration** menu.)

- 2 On the **Configuration > Email Notifications** screen, review the list of current email recipients.
- 3 Select the recipient whose information you want to view, and then click **View**.
- 4 When you are finished viewing recipient information, click **Cancel** to return to the **Configuration > Email Notifications** screen.

Editing an Email Recipient

Follow this procedure to edit information for a previously entered email recipient.

- 1 If you have not already done so, when the Configuration Wizard is displayed, choose **Email Notifications** on the left side of the screen. (Alternatively, choose **Email Notifications** from the **Configuration** menu.)
- 2 On the **Configuration > Email Notifications** screen, select the recipient whose information you want to edit and then click **Edit**.
- 3 Modify any of the fields on the screen. (For detailed information about what to enter on this screen, see the online help.)
- 4 When you are finished making modifications, click **Apply** to save your changes and return to the **Configuration > Email Notifications** screen. (To exit without saving, click **Cancel**.)

Deleting an Email Recipient

Follow this procedure to delete a previously entered email recipient.


- 1 If you have not already done so, when the Configuration Wizard is displayed, choose **Email Notifications** on the left side of the screen. (Alternatively, choose **Email Notifications** from the **Configuration** menu.)
- 2 On the **Configuration > Email Notifications** screen, review the list of current email recipients.
- 3 Select the recipient you want to delete and then click **Delete**.
- 4 When the confirmation message appears, click **Yes** to proceed or **No** to abort the deletion.
- 5 When a message informs you that the email notification recipient was successfully deleted, click **OK** return to the **Configuration > Email Notifications** screen.

Step 9: Done

The last step in the Configuration Wizard is to click **Done** to indicate that you have completed all configuration steps.

On this screen you can also convert to a high availability (HA) configuration by clicking **Convert to HA**. Clicking this button is the same as choosing **High Availability > Convert** from the **Tools** menu. For information about entering the fields on this screen and converting to an HA system, see [Converting to HA](#) on page 217.

Figure 34 Configuration > Configuration Wizard Done Screen

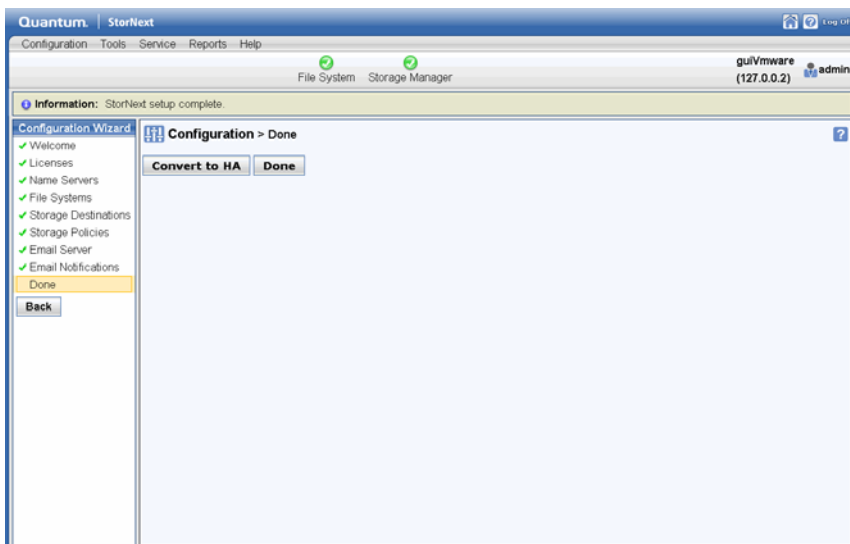



Chapter 4

File System Tasks

In addition to the basic file system tasks described for the Configuration Wizard in [Step 4: File Systems](#) on page 34, the **Tools > File Systems** menu contains additional options that enable you to perform the following file system-related tasks:

- [Label Disks](#): Apply EFI or VTOC label names for disk devices in your StorNext libraries
- [Check File System](#): Run a check on StorNext files systems prior to expanding or migrating the file system
- [Affinities](#): Allocate additional storage to a file system by creating a new stripe group in the file system configuration file, and assigning new disks to the stripe group
- [Migrate Data](#): Move data files from a source file system to a destination stripe group, freeing stripe groups so they can be removed from an existing StorNext file system
- [Truncation Parameters](#): Enter truncation parameters for your file systems in order to free up file storage that isn't being actively used

Label Disks

Each drive used by StorNext must be labeled. (A new drive must be labeled only one time.) You can label a drive from any StorNext server or client that has a fibre channel (FC) connection to the drive.

There are two types of label:

- EFI labels are required if you plan to create LUNs that are larger than 2TB. (For Solaris, EFI labels are also required for LUNs with a raw capacity greater than 1TB.)
- VTOC labels were used for all operating systems in previous StorNext and Xsan releases, and are still required for Solaris releases prior to Solaris 10 Update 2, and LUNs less than 1TB.


Labeling a Device

Follow this procedure to label any new or unused devices, or relabel a device that has been unlabeled.

Caution: Labeling a disk device may result in a complete loss of data on that disk device.

- 1 Choose **Label Disks** from the **Tools > File Systems** menu. The **Tools > Label Disks** screen appears.

Figure 35 Label Disks Screen

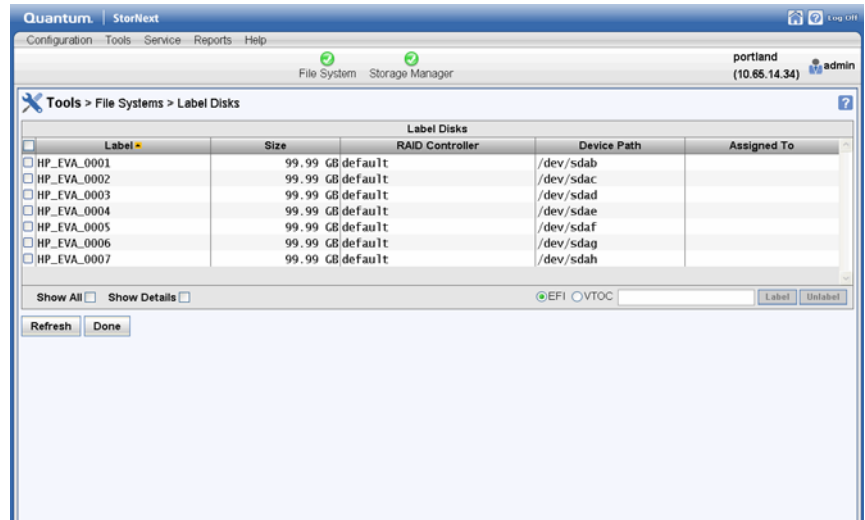

- 2 Select the disk devices to which you want to apply labels. (Click **All** to select all available disks.) If a disk device already has a label, continuing with this procedure overwrites the existing label.

Caution: Overwriting or renaming a disk device label may result in a complete loss of data on that disk device.

- 3 Specify the label type by choosing **EFI** or **VTOC**.
- 4 Enter a label name in the text field to the right of the **EFI** and **VTOC** buttons.
- 5 Click **Label**.
- 6 When the confirmation message appears, verify that the disk you are labeling is empty, and then click **OK** to proceed. (Click **Cancel** to abort without labelling the disk.)

Note: If you later unlabel a device and then decide to make the unlabeled device usable by the StorNext File System, you must first relabel the device. The relabeling process is identical to labeling initially.

Unlabeling a Device

Follow this procedure to remove a label from a previously labeled device. If you unlabel a device and then decide later to make the unlabeled device usable by the StorNext File System, you must first relabel the device. The relabeling process is identical to labeling initially as described in [Labeling a Device](#).

Note: You cannot remove the label from a disk device that has been previously assigned to a file system. You can identify these devices by the file system name under the Filesystem heading.

- 1 If you have not already done so, choose **Label Disks** from the **Tools > File Systems** menu.
- 2 Select the disk devices from which you want to remove labels. (Click **All** to select all available disks.)
- 3 Click **Unlabel**.
- 4 When the confirmation message appears, click **OK** to verify that you want to unlabel the selected disk(s). (Click **Cancel** to abort without unlabelling the disk.)

Caution: When you unlabel a device, all data on that device will be lost. Additionally, the unlabeled device will no longer be used by the file system until it is relabeled.

Check File System

Before you perform either File System Expansion or Migration, you must first perform a check on the file system you plan to use for these features. This operation could take a significant amount of time depending on the size of the file system, so plan accordingly.


Also, this operation could consume a significant amount of space on the local file system. For example, for large file systems you should allow at least 20GB of free space on the local file system for temporary files.

For more information about file system expansion, refer to the StorNext online help.

Use the following procedure to perform a file system check.

- 1 Choose **Check File System** from the **Tools > File Systems** menu. The **Tools > Check > [file system name]** screen appears.

Figure 36 Check File System Screen

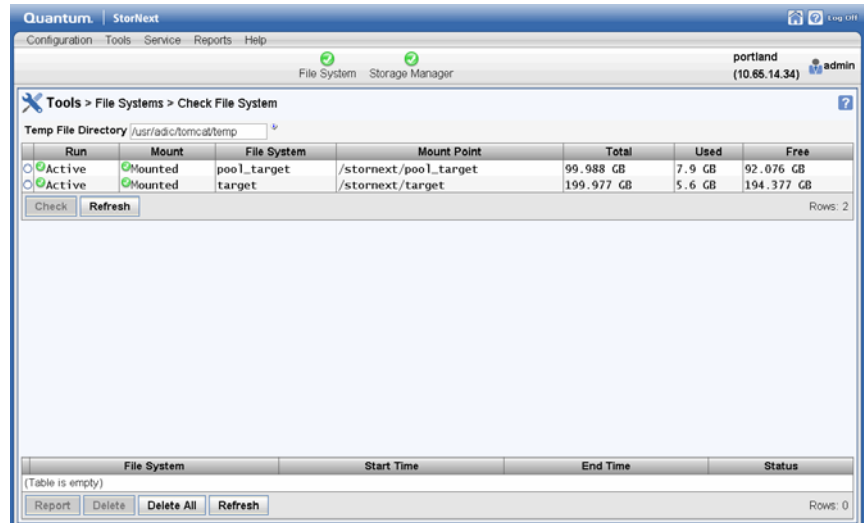


- 2 At the **Temp File Directory** field, enter a new directory if the specified directory does not have enough space to perform the check. (The checking process on large file systems can take hundreds of megabytes or more of local system disk space for working files.)
- 3 Select the file system you want to check. (Only file systems eligible for File System Expansion or Migration are shown.)
- 4 Click **Check** to begin checking the selected file system. Current progress and other details about the checking process appear at the bottom of the screen.

Note: If the file system you select is currently started and mounted, the check will be automatically performed in read-only mode. In read-only mode on a live file system (started and mounted,) you could receive false errors.

Viewing and Deleting a Check Report

After you have run at least one file system check, information about the process appears at the bottom of the screen: file system name, the time the check was initiated and completed, and the status of the check. To view details about a specific check, select the desired check at the bottom of the screen and then click **Report**. When you are finished viewing the report, click **Done** to return to the previous screen.

Figure 37 Check File System Report

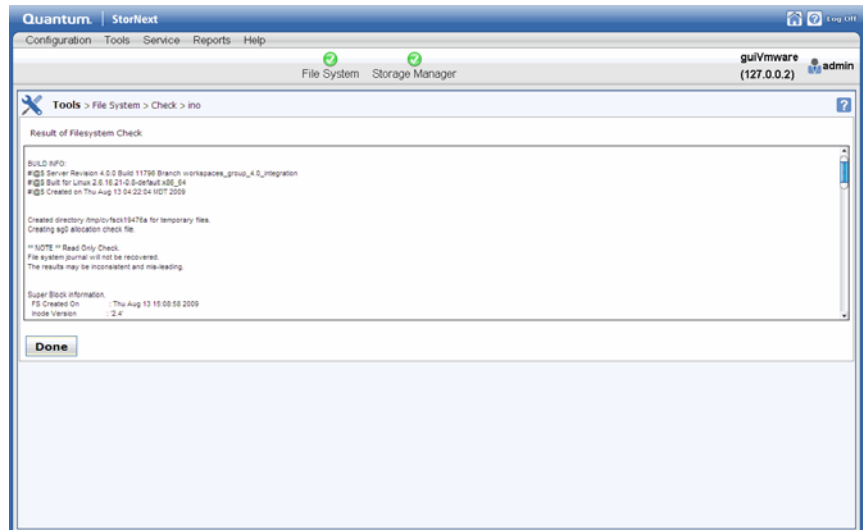

To delete a check report from the list, select the check you want to delete and then click **Delete**. To delete all previously run checks listed, click **Delete All**.

File System Check Output Files

If you do not want to use StorNext to view output from the file system check, you can view output in two files:

- `/usr/cvfs/data/<fsname>/trace/cvfsck-<timestamp>`
For example: `/usr/cvfs/data/snfs1/trace/cvfsck-02_22_2010-12_15_19`
- `/usr/adic/gui/logs/jobs/CHECK_FS-<timestamp>-<jobid>`
For example: `/usr/adic/gui/logs/jobs/CHECK_FS-20100222_121519-77`

Affinities

This section describes StorNext’s “stripe group affinity” feature, and also provides some common use cases.

A *stripe group* is a collection of LUNs (typically disks or arrays) across which data is striped. Each stripe group also has a number of associated attributes, including affinity and exclusivity.

An *affinity* is used to steer the allocation of a file’s data onto a set of stripe groups. Affinities are referenced by their name, which may be up to eight characters long. An affinity may be assigned to a set of stripe groups, representing a named pool of space, and to a file or directory, representing the logical point in the file system and directing the storage to use the designated pool.

Exclusivity means a stripe group has both an affinity and the exclusive attribute, and can have its space allocated only by files with that affinity. Files without a matching affinity cannot allocate space from an exclusive stripe group. Files with an affinity that is exclusive cannot be stored on other stripe groups without that affinity. If the exclusive stripe group(s) become filled, no more files with that affinity can be stored.

Affinities for stripe groups are defined in the file system configuration file. Although stripe groups can be created by adding one or more Affinity lines to the configuration file’s StripeGroup section, Quantum recommends using the StorNext GUI to add stripe groups. A stripe group may have multiple affinities, and an affinity may be assigned to multiple stripe groups.

Allocation Strategy

- StorNext has multiple allocation strategies which can be set at the file system level. These strategies control where a new file’s first blocks will be allocated. Affinities modify this behavior in two ways:
- A file with an affinity will be allocated only on a stripe group with matching affinity.
- A stripe group with an affinity and the exclusive attribute will be used only for allocations by files with matching affinity.

Once a file has been created, StorNext attempts to keep all of its data on the same stripe group. If there is no more space on that stripe group, data may be allocated from another stripe group. If the file has an

affinity, only stripe groups with that affinity will be considered; if all stripe groups with that affinity are full, new space may not be allocated for the file, even if other stripe groups are available.

Example Use Cases

Affinities can be used to segregate audio and video files onto their own stripe groups. For example:

- Create one or more stripe groups with an AUDIO affinity and the exclusive attribute.
- Create one or more stripe groups with a VIDEO affinity and the exclusive attribute.
- Create one or more stripe groups with no affinity (for non-audio, non-video files).
- Create a directory for audio using `'cvmkdir -k AUDIO audio'`.
- Create a directory for video using `'cvmkdir -k VIDEO video'`.

Files created within the audio directory will reside only on the AUDIO stripe group. (If this stripe group fills, no more audio files can be created.)

Files created within the video directory will reside only on the VIDEO stripe group. (If this stripe group fills, no more video files can be created.)

To reserve high-speed disk for critical files:

- Create a stripe group with a FAST affinity and the exclusive attribute.
- Label the critical files or directories with the FAST affinity.

The disadvantage here is that the critical files are restricted to only using the fast disk. If the fast disk fills up, the files will not have space allocated on slow disks.

To reserve high-speed disk for critical files, but allow them to grow onto slow disks:

- Create a stripe group with a FAST affinity and the exclusive attribute.
- Create all of the critical files, pre allocating at least one block of space, with the FAST affinity. (Or move them using `sdfsdefrag`, after ensuring they are non-empty.)

- Remove the FAST affinity from the critical files.

Because files will allocate from their existing stripe group, even if they no longer have a matching affinity, the critical files will continue to grow on the FAST stripe group. Once this stripe group is full, they can allocate space from other stripe groups, since they do not have an affinity.


This will not work if critical files may be created later, unless there is a process to move them to the FAST stripe group, or an affinity is set on the critical files by inheritance but removed after their first allocation (to allow them to grow onto non-FAST groups).

Adding a New Affinity

Follow this procedure to add affinities:


- 1 Choose **Affinities** from the **Tools > File Systems** menu. The **Tools > File Systems > Affinities** screen appears.

Figure 38 Affinities Screen

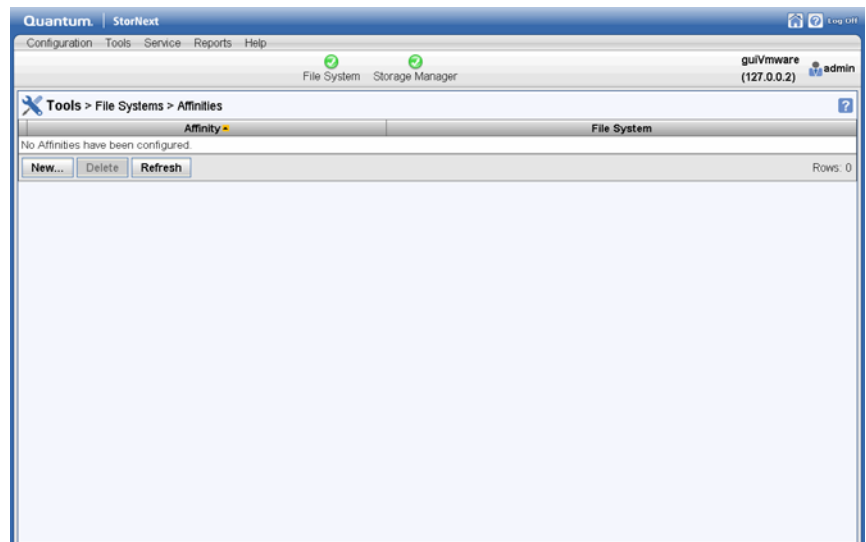

- 2 Click **New**. The **New Affinity** screen appears.

Figure 39 New Affinity Screen

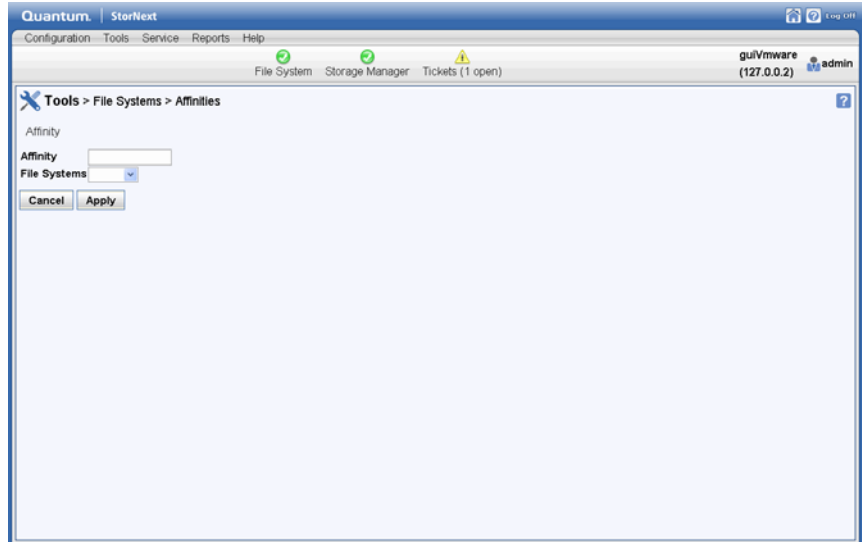

- 3 At the **Affinity** field, enter the name of the new affinity.
- 4 At the **File Systems** field, select the file system to which you want to associate the new affinity.
- 5 Click **Apply** to create the affinity.
- 6 When a message notifies you that the affinity was successfully created, click **OK** to continue.

Deleting an Affinity

Follow this procedure to delete affinities:

- 1 If you have not already done so, choose **Affinities** from the **Tools > File Systems** menu. The **Tools > File Systems > Affinities** screen appears.
- 2 Select the affinity you want to delete.
- 3 Click **Delete**.
- 4 When asked to confirm the deletion, click **Yes** to proceed or **No** to abort.

- 5 When a message notifies you that the affinity was successfully deleted, click **OK** to continue.

Migrate Data

Migrating file system data refers to moving data files from a file system's source stripe group to all the other stripe groups on the same file system, and then freeing the source stripe group so it can be removed from the file system. You can select the source stripe group only, not the destination stripe group(s). Files will be moved randomly to new stripe groups while respecting their affinity rules (if any). When migrating, make sure the source stripe group is completely empty when the process completes, because source files that are updated while the file system is running may be left behind, requiring a second iteration of the migration.

During file system migration, you indicate a file system from which to move data.


StorNext then moves all data of the same type (either data or metadata,) from the source file system to the specified destination stripe group. During movement the file system is left online and read/write operations occur normally.

The time it takes to complete the migration process depends on the amount of data being moved between source file system and target stripe groups. When moving a data stripe group, the file system continues to run during the move. StorNext does not block any new read/write requests, or block updates to existing files on the source file system. All operations (including metadata operations) are handled normally, but no new writes are allowed to the source stripe group, which will be marked read-only.

Use the following procedure to perform file system migration.

- 1 Choose **Migrate Data** from the **Tools > File Systems** menu. The **Tools > File systems > Migrate** screen appears.

Figure 40 Migrate Screen

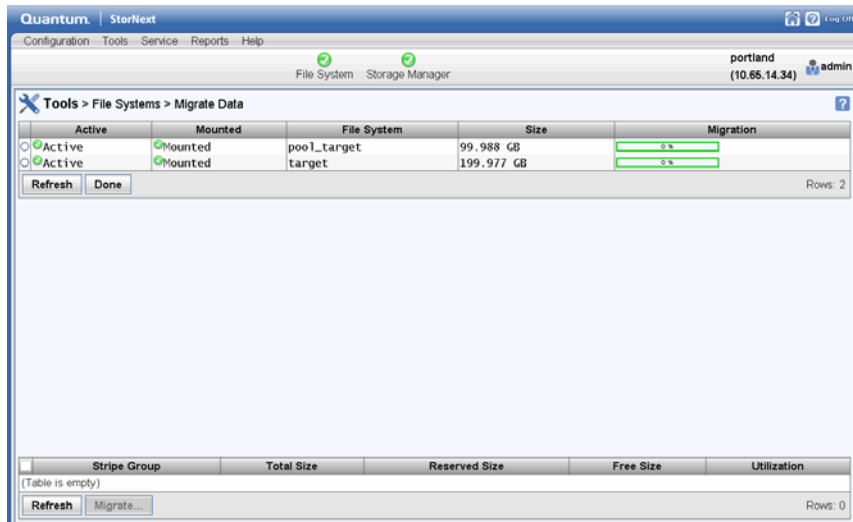

- 2 Select the target file system from which files will be migrated.
- 3 Select the destination stripe group to which files will be migrated.
- 4 Click **Migrate**.

Caution: This particular function does not provide a confirmation message, so be absolutely sure you want to migrate data from the selected file system to the selected stripe group before you click **Migrate**.

Truncation Parameters


The Truncation Parameters screen enables you to view or change the following information pertinent to the truncation feature as it pertains to StorNext Storage Manager:

- **Run:** Indicates the current status of the truncation feature: Online of Offline.
- **Mount:** Indicates whether the file system is currently mounted.

- **File System:** Displays the name of the truncation-enabled file system.
- **Mount Point:** Shows the mount point for the truncation-enabled file system
- **Truncation Parameters:** Shows the current truncation setting, such as Time-based 75%.

Note: This screen pertains ONLY to truncation for StorNext Storage Manager users. It does not apply to deduplication or other StorNext features.

Figure 41 Truncation Parameters Screen

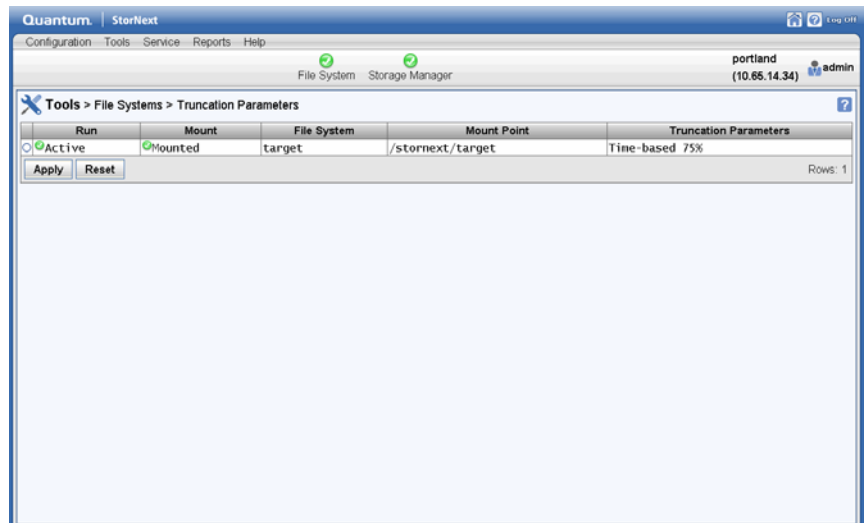

To change truncation parameters:

- 1 Click the line containing the file system whose truncation parameters you want to change. Parameters appear at the bottom of the screen.
- 2 As desired, modify any of the following fields. (See the online help for information about what to enter at each field.)
 - **Enable Truncation**
 - **Truncation Mode**
 - **Minimum Usage (%)**

- **Low Water (%)**
- **High Water (%)**

- 3 Click **Apply** to save your changes.
- 4 When a confirmation message appears, click **Yes** to continue or **No** to abort without saving.

Note: When you save changes to truncation parameters, the StorNext Policy Manager must be restarted. This process could take several minutes, so plan accordingly.

- 5 Click **Done** when you are finished viewing or changing truncation parameters.



Chapter 5

Storage Manager Tasks

The **Tools > Storage Manager** menu contains options that enable you to perform the following Storage Manager-related tasks:

- [Storage Components](#): View your system's libraries, storage disks, and tape drives, and place those devices online or offline
- [Drive Pools](#): View, add, edit, or delete drive pools (groups of tape drives allocated for various administrator-defined storage tasks)
- [Media Actions](#): Perform various actions on the storage media in your library
- [Storage Exclusions](#): Specify types of file names to exclude from StorNext Storage Manager
- [Truncation Exclusions](#): Specify files or directories to exclude from the truncation process
- [Tape Consolidation](#): Enter parameters for automatically consolidating space on tape media
- [Library Operator Interface](#): The StorNext Library Operator Interface allows you to perform media-related actions remotely from the library
- [Software Requests](#): View current software requests in progress or cancel a request
- [Scheduler](#): Schedule tasks to run automatically based on a specified schedule


- [Alternate Retrieval Location](#): Specify a remote retrieval location to use in situations where files stored on tape or a storage disk cannot be accessed.
- [Distributed Data Mover \(DDM\)](#): Spread the distribution of data across several machines rather than the primary server.

Storage Components

The Tools menu's Storage Components option enables you to view your system's libraries, storage disks, and tape drives, and place those devices online or offline. The **Tools > Storage Manager > Storage Components** screen is divided into three sections corresponding to libraries, storage disks and tape drives.

To access the **Tools > Storage Manager > Storage Components** screen, choose **Storage Components** from the **Tools > Storage Manager** menu.

Figure 42 Storage Components Screen

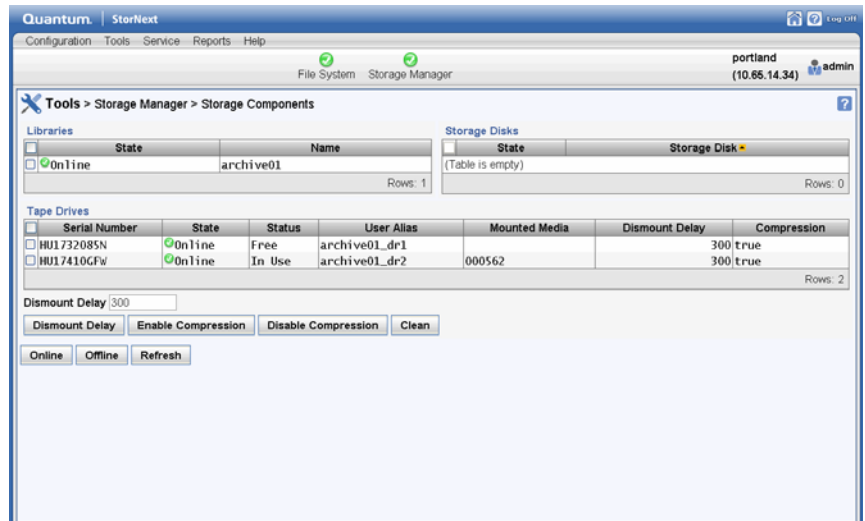

Setting Devices Online and Offline

The process for setting devices online or offline is identical regardless of device type. Select the library, storage disk or tape drive you want to place online or offline. You can select multiple devices in each category, or select all available devices in each category by clicking **All**. After you are satisfied with your selections, click either **Online** to place selected devices online, or **Offline** to take selected devices offline.

Additional Options for Tape Drives

There are four additional options available for tape drives:

- **Dismount Delay:** This option enables you to specify the time, in seconds, that a tape drive remains idle before the media in that drive is dismounted. Select the tape drives for which you want the delay, enter the desired time interval at the Dismount Delay field, and then click **Dismount Delay**.
- **Enable Compression:** Compression is a feature supported by some tape drives which maximizes the amount of available storage space. To enable compression, select the tape drives for which you want to enable compression and then click **Enable Compression**.
- **Disable Compression:** If compression was previously enabled and you want to disable it, select the tape drives for which you want to disable compression and then click **Disable Compression**.
- **Clean:** This option allows you to request that a drive be cleaned. Before choosing this option, make sure the tape drive is loaded with a cleaning cartridge. When you are ready to proceed, click **Clean**.

Drive Pools


Drive pools are groups of tape drives allocated for various administrator-defined storage tasks, and enable you to delimit storage processes based on data type, performance, security, location, or all of these variables. Drive pools can reside in a single tape library or span multiple tape libraries.

Viewing Drive Pool Information

Follow this procedure to view drive pool information.

- 1 Choose **Storage Manager > Drive Pools** from the **Tools** menu. The **Drive Pools** screen appears.

Figure 43 Drive Pools Screen

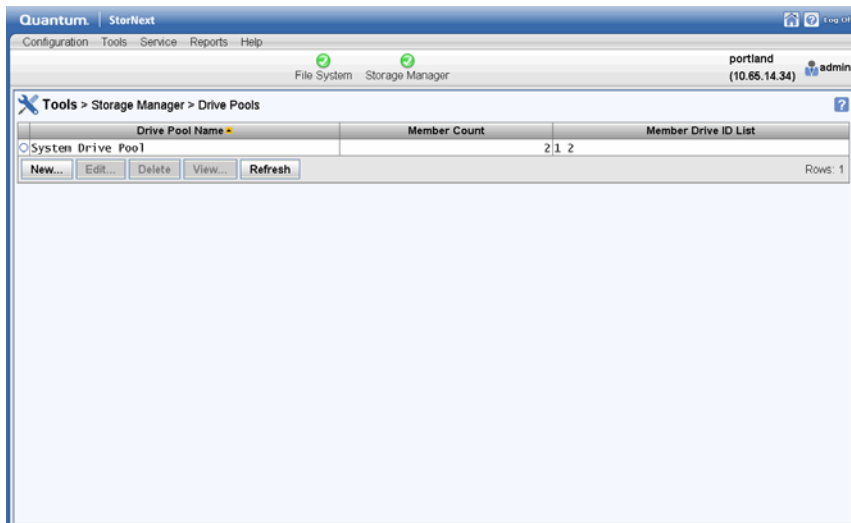

- 2 Select the drive pool whose information you want to see, and then click **View**.
- 3 The following information appears:
 - **Serial Number:** The serial numbers of all tape drives in the drive pool
 - **Drive Alias:** The corresponding alias number for each drive
 - **Media Type:** The type of tape drive media for each drive (e.g., LTO)
 - **Library:** The name of the library to which each drive belongs
 - **Pool Name:** The name of the drive pool to which each drive belongs
- 4 When you are finished viewing drive pool information, click **Done**.


Adding a Drive Pool

Follow this procedure to add a drive pool.

Note: This procedure requires restarting the StorNext Storage Manager component.

- 1 If you have not already done so, choose **Storage Manager > Drive Pools** from the **Tools** menu.
- 2 Click **New** to add a new drive pool. The **Drive Pools > New** screen appears.

Figure 44 New Drive Pool Screen

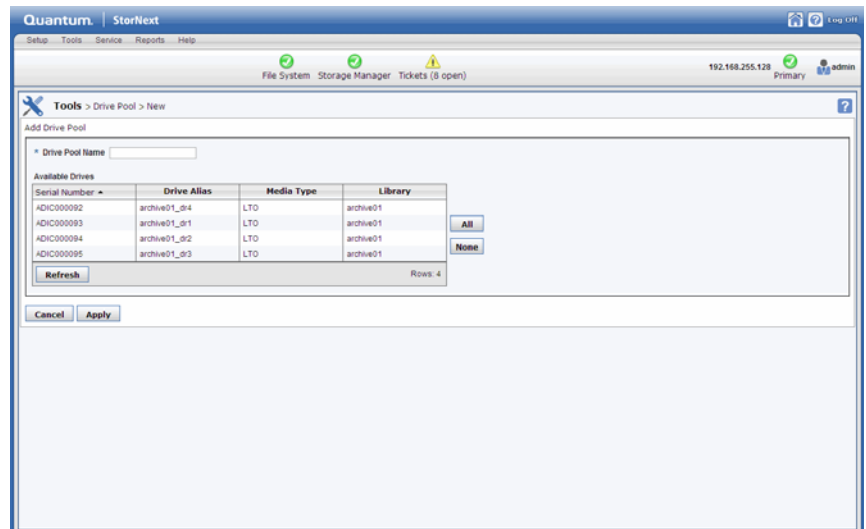

- 3 Enter the following fields. (For information about what to enter at each field, see the online help.)
 - **Drive Pool Name**
 - **Available Drives**
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to proceed or **No** to abort. If you click **Yes**, StorNext Storage Manager will be restarted as part of the creation process.

- 6 After a message informs you that the drive pool was successfully created, click **OK** to continue.

Editing a Drive Pool

Follow this procedure to edit a drive pool.

Note: This procedure requires restarting the StorNext Storage Manager component.

- 1 If you have not already done so, choose **Storage Manager > Drive Pools** from the **Tools** menu.
- 2 Select the drive pool you want to modify, and then click **Edit**.
- 3 Select or deselect available drives for the drive pool. (You cannot change the drive pool name.)
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 6 After a message informs you that the drive pool was successfully modified, click **OK** to continue.

Deleting a Drive Pool

Follow this procedure to delete a drive pool. Before you begin, you must first remove all drives in the pool you want to delete.

Caution: At least one drive pool must be configured at all times. Do not delete the default drive pool.

- 1 If you have not already done so, choose **Storage Manager > Drive Pools** from the **Tools** menu.
- 2 Select the drive pool you want to delete, and then click **Delete**.
- 3 When a confirmation message appears, click **Yes** to proceed with the deletion or **No** to abort.
- 4 After a message informs you that the drive pool was successfully deleted, click **OK**.

Media Actions

The Tools menu's **Media Actions** option enables you to perform various actions on the storage media in your library.

To access the **Tools > Storage Manager > Media Actions** screen, choose **Media Actions** from the **Tools > Storage Manager** menu.

Figure 45 Media Actions Screen

Media ID	Library	Media Type	Media Class	Policy Class	Suspect	Write Protected	File Count	Mounted in Drive	Last Accessed
000526	archive01	LTO	F0_LTO_DATA	_adic_backup	No	No	42		2010-07-18 22:20:54 CDT
000560	archive01	LTO	F0_LTO_DATA	policy2	No	No	115122		2010-07-19 13:38:10 CDT
000561	archive01	LTO	F0_LTO_DATA	policy2	No	No	113107		2010-07-19 14:39:29 CDT
000562	archive01	LTO	F0_LTO_DATA	policy1	No	No	91899	archive01_dr2	2010-07-16 15:56:57 CDT
000563	archive01	LTO	F0_LTO_DATA	policy1	No	No	166065		2010-07-19 14:49:18 CDT
000564	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-07-08 11:07:04 CDT
000687	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-07-08 11:07:04 CDT

Viewing Media Information

After you choose the **Media Actions** option, the following information about all of the storage media appears:

- **Media ID:** The unique identifier for the media.
- **Library:** The name of the library in which the media resides.
- **Media Type and Class:** The media type and class of media. (For example, LTO, F0_LTO_DATA)
- **Policy Class:** The name of the policy class, if any associated with the media.

- **Suspect:** Indicates whether the media is “suspect” or potentially defective.
- **Write Protected:** Indicates whether write protection is enabled on the media.
- **File Count:** The current number of files currently on the media.
- **Mounted in Drive:** Indicates whether the media is mounted.
- **Last Accessed:** The time the media was last accessed.

Filtering Media

Most **Media Actions** screens contain a filtering feature that allows you to restrict the available media to those whose media ID contains the string you specify. Follow these steps to filter media:

- 1 At the **Media ID Filter** field, enter the string you want all available media IDs to include.
- 2 Click **Set Filter**.
- 3 Click Refresh to update the list of available media. Only media whose IDs contain the string you entered will be shown.
- 4 To reset the filter string, click **Clear Filter**. If desired, repeat steps 1 - 3 to use a new filter string.

Performing Media Actions

At the top of the screen is a dropdown list of actions you can perform for selected media. Select the media for which you want to perform the action, and then choose one of these options from the Available Actions list:

Mount Media

Select this option to mount the storage media.

- 1 After you select this option, select from the **Library** dropdown list the library containing the media you want to mount.
- 2 Select the media to mount.
- 3 At the **Mount Media Parameters > Drive** field, select the drive on which to mount the media.
- 4 Click **Apply**.

- 5 When the confirmation message appears, click **Yes** to mount the media, or **No** to abort.

Dismount Media

Select this option to dismount previously mounted media.

- 1 After you select this option, a list of mounted media appears.
- 2 Select the media you want to dismount, and then click **Apply**.
- 3 When the confirmation message appears, click **Yes** to dismount the media, or **No** to abort.

Move Media

Select this option to move media from one library to another.

- 1 After you select this option, select from the **Library** dropdown list the library containing the media you want to move.
- 2 Select one or more media to move, or click **All** to select all media.
- 3 At the **Move Media Parameters > Destination Library** field, select the destination library to which you want to move the selected media.
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to move the selected media, or **No** to abort.

Remove Media

Select this option to remove media from the StorNext Storage Manager. Only media with no active files on a media can be selected for removal. The media is removed from the system and is physically ejected from the library.

- 1 After you select this option, select from the **Library** dropdown list the library containing the media you want to remove.
- 2 Select one or more media to remove, or click **All** to select all media.
- 3 Click **Apply**.
- 4 When the confirmation message appears, click **Yes** to remove the selected media, or **No** to abort.

Purge Media

Select this option to purge media from the StorNext Storage Manager. All files are removed from the selected media, and then the media is removed from the StorNext Storage Manager and is physically ejected from the library.

- 1 After you select this option, select from the **Library** dropdown list the library containing the media you want to purge.
- 2 Select one or more media to purge, or click **All** to select all media.
- 3 Click **Apply**.
- 4 When the confirmation message appears, click **Yes** to purge the selected media, or **No** to abort.

Reclassify Media

Select this option to change the media type classification for selected media.

- 1 After you select this option, select from the **Media Class** dropdown list the current media class designation you want to change.
- 2 Select one or more media to reclassify, or click **All** to select all media.
- 3 At the **Reclassify Media Parameters > Destination Media Class** field, select the new media type designation for the selected media. Select one of these options:
 - **DATA**: This media class means that media are candidates for read/write operations. Most media residing in the library have this classification unless they are full.
 - **ADDBLANK**: This is the default class with which media are associated when they are added to StorNext MSM. (Running the `Fsmedin` command pulls media from this class and changes the classification to **DATA**.)
 - **IMPORT**: Before running the `fsmedin` command on TSM-exported media, the classification should be changed to **IMPORT**.
 - **CHECKIN**: This classification is used for re-entering media which have been checked out. Media must be reclassified with

CHECKIN prior to TSM performing fsmedin with the checkin option.

- **MIGRATE:** TSM reclassifies media to this classification when the media becomes full according to the FS_PERCENT_FULL system parameter. Media with this classification can still be read.
- **CLEAN:** Media in the class are cleaning media. If the barcode of a media ends with CLN, MSM imports the media into this class instead of ADDBLANK.
- **REMOVE:** Media get reclassified to REMOVE when fsmedout is used.
- **BACKUP:** Media with this classification were used for backups before backups were managed by StorNext storage polices. Consequently, this classification is rarely used.

4 Click **Apply**.

5 When the confirmation message appears, click **Yes** to reclassify the selected media, or **No** to abort.

Assign Media to Policy Class

Select this option to assign media to a previously created policy class.

- 1 Select one or more media to assign, or click **All** to assign all media.
- 2 At the **Assign Media to Policy Class Parameters > Destination Policy Class** field, select the policy class to which you want to assign selected media.
- 3 Click **Apply**.
- 4 When the confirmation message appears, click **Yes** to assign the selected media, or **No** to abort.

Transcribe Media

Transcribe (copy) the contents of one media type to another media type, or reclaim (defragment) media. During the transcription or reclamation process, StorNext uses two drives to transcribe one media to another media, file by file.

Caution: For StorNext to successfully transcribe one media to another media, two drives must be online. If only one drive is online, the transcription or reclamation process fails.

- 1 Select one or more media to transcribe, or click **All** to select all media.
- 2 Click **Apply**.
- 3 When the confirmation message appears, click **Yes** to dismount the media, or **No** to abort.
- 4 Repeat steps 1 - 3 to transcribe additional media.

If transcription or reclamation starts and all the drives are in use, StorNext prioritizes and queues the job. When two drives become available, the queued job starts and all active files are transcribed. When transcription is complete, StorNext updates the database to reflect the new location of the files.

If the transcription or reclamation process encounters a file that spans multiple media, only the portion of the file that exists on the old media is transcribed.

When the transcription or reclamation process is complete, only deleted files remain on the source media. To remove the source copy of the deleted files, you must clean the media. After the cleaning process is complete and the source copy of the deleted files are removed, the media is available for reuse as blank media.

Media Attributes

Select this option to view the attributes currently assigned to your media, or to change attributes.

- 1 If desired, filter the displayed list of media by selecting one or more of the following media attribute filters: **Suspect**, **Marked**, **Full**, **Unavailable**, or **Write Protected**. The list refreshes each time you select a media attribute filter.

"Suspect" means the media might not be physically sound, and could be in a potentially damaged or unusable condition.

"Marked" means the media should be made inaccessible.

"Full" means the media has reached capacity and should not be available for further writing.

"Unavailable" means the media is not available for writing or reading.

"Write Protected" means the media is protected against further writing and cannot be overwritten or have data added.

- 2 Select from the list one or more media whose attributes you want to change, or click **All** to select all media.
- 3 At the **Media Attributes Parameters > New Media State** field, select the new attribute you want to apply to the selected media.
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to move the selected media, or **No** to abort.
- 6 Repeat steps 3 - 5 to apply additional attributes to the selected media.

Clean Media by Media ID

Select this option if you want to select media for cleaning based on media ID. Periodic cleaning helps prevent inactive information from growing to an unmanageable size. When you run this function, the StorNext Storage Manager removes inactive files that have not been accessed since the specified endtime. This process does not affect current file versions on the media.

Caution: Inactive file versions cleaned from the media cannot be recovered or used again.

- 1 Select one or more media you want to clean, or click **All** to select all media.
- 2 At the **Clean Media by Media ID Parameters > End Time** field, enter the time when you want the cleaning process to stop. (You can also use the displayed default end time.)
- 3 Use the format **yyyy:MM:dd:HH:mm:ss** when entering an end time.
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to begin cleaning media, or **No** to abort.

Clean Media by File System

Select this option if you want to select media for cleaning based on the file system with which media are associated. Periodic cleaning helps prevent inactive information from growing to an unmanageable size. When you select this option all media on the selected file system are cleaned. When you run this function, the StorNext Storage Manager removes inactive files that have not been accessed since the specified endtime. This process does not affect current file versions on the media.

Caution: Inactive file versions cleaned from the media cannot be recovered or used again.

- 1 At the **Clean Media by File System Parameters > Managed and Mounted File Systems** field, select the file system whose media you want to clean.
- 2 At the **Clean Media by File System Parameters > End Time** field, enter the time when you want the cleaning process to stop. (You can also use the displayed default end time.) Use the format **yyyy:MM:dd:HH:mm:ss** when entering an end time.
- 3 Click **Apply**.
- 4 When the confirmation message appears, click **Yes** to begin cleaning media, or **No** to abort.

Clean Media by Policy Class

Select this option if you want to select media for cleaning based on the policy class with which media are associated. When you select this option all media associated with the selected policy class are cleaned. Periodic cleaning helps prevent inactive information from growing to an unmanageable size. When you select this option all media on the selected file system are cleaned. When you run this function, the StorNext Storage Manager removes inactive files that have not been accessed since the specified endtime. This process does not affect current file versions on the media.

Caution: Inactive file versions cleaned from the media cannot be recovered or used again.

- 1 At the **Clean Media by Policy Class Parameters > Policy Classes** field, select the policy class whose media you want to clean.
- 2 At the **Clean Media by Policy Class Parameters > End Time** field, enter the time when you want the cleaning process to stop. (You can also use the displayed default end time.) Use the format **yyyy:MM:dd:HH:mm:ss** when entering an end time.
- 3 Click **Apply**.
- 4 When the confirmation message appears, click **Yes** to begin cleaning media, or **No** to abort.

Add Media Mailbox

Select this option to add media through a library mailbox.

- 1 At the **Add Media Mailbox Parameters > Library** field, select the library with the mailbox through which you want to add media.
- 2 Click **Apply**.
- 3 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 4 When a message informs you that the operation was successful, click **OK**. After you see this message you are ready to load media through the library mailbox.

Add Media Bulk Load

Select this option to add media to a library via bulk loading.

- 1 At the **Add Media Bulk Load Parameters > Library** field, select the library into which you want to bulk load media.
- 2 Click **Apply**.
- 3 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 4 When a message informs you that the operation was successful, click **OK**. After you see this message you are ready to bulk load media into the library.

Storage Exclusions

The Tools menu's **Storage Exclusions** option enables you to specify types of files you want excluded from storage and StorNext processing. For example, you may want to exclude certain confidential files or files containing sensitive material.

The process involves specifying file names, as well as criteria so StorNext knows how to identify the files to exclude. You can create as many exclusion patterns as you like, and as your needs change you can delete unwanted exclusion patterns. These exclusions are stored in a file which StorNext checks before executing store operations.

Note: If you exclude a file and then later rename that file, the renamed file will not be excluded from store operations unless:

- there is an existing exclusion that covers the renamed file


OR

- you create a new exclusion for the renamed file.
-

Accessing Storage Exclusions

To access the **Tools > Storage Manager > Storage Exclusions** screen, choose **Storage Exclusions** from the **Tools > Storage Manager** menu. Any previously saved exclusions are displayed.

Figure 46 Storage Exclusions Screen

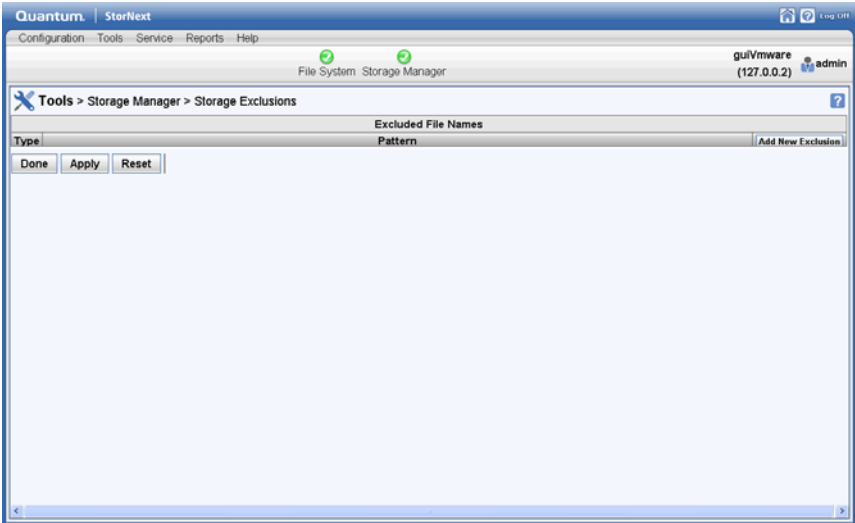


Adding an Exclusion Pattern

To add a new exclusion:

- 1 Click **Add New Exclusion**. The Exclusion screen appears.

Figure 47 Exclusion Screen

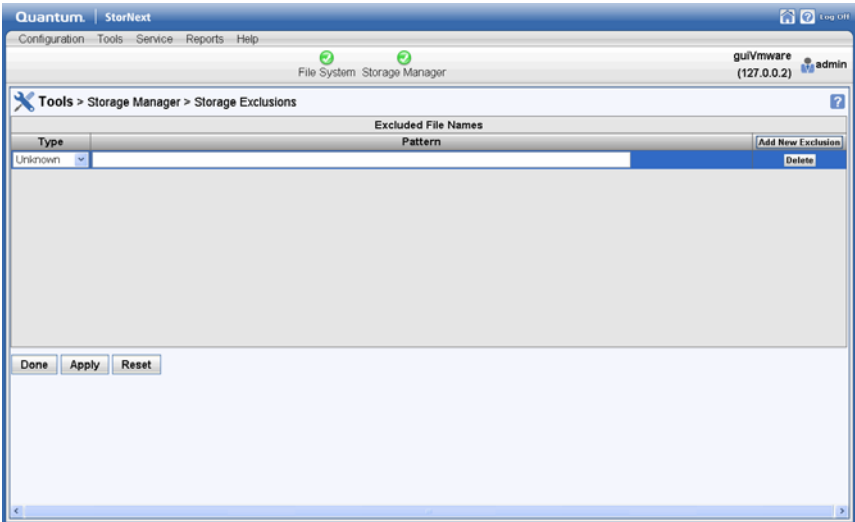

2 Choose from the **Type** pulldown list one of the following types of exclusions:

- **Unknown:** This type appears until you select a different type, and remains if you select no type.
- **Match:** Files which match the string in the Pattern field are excluded. Wildcards can be used for this type.
- **Match Path:** Files in the path which match the string in the Pattern field are excluded. Wildcards can be used for this type.

The difference between **Match** and **Match Path** is that slashes must be explicitly entered for the Match Path type. When using Match Path you cannot substitute a wildcard for a slash. However, for storage exclusions only file names can be specified (no paths) so these two types have the same effect.

- **Begins With:** Files beginning with the string in the Pattern field are excluded.
- **Ends With:** Files ending with the string in the Pattern field are excluded.
- **Contains:** File names containing the string in the Pattern field are excluded.
- **Exact:** Only files that *exactly* match the string in the Pattern field are excluded.

3 At the **Pattern** field, enter the search string for the file name. Depending on the exclusion type you selected, this could be a whole or partial file name, or a string.

If you selected the Match or Match Path type, you can use the following wildcards at the Pattern field:

- **?** (question mark): Substitute any single character. For example, if you enter **t?p**, it will match "top" "tip" and "tap".
- ***** (asterisk): Substitute one or more characters. For example, if you enter **f*I**, it will match "ful" "fail" "foil" "fall" and "frail".
- **[]** (brackets): When you use this wildcard, it allows a set of characters to be specified. For example, if you enter **[abc]***, any string beginning with the letters "a" "b" or "c" will be matched. When using brackets you can also specify a range by using the - (dash) character. For example, if you enter **file[1-4]**, the strings "file1" "file2" "file3" and "file4" are matched. You can also specify a complement of characters to *not* match. For example,

if you enter `[!abc]*`, any string that does not begin with the letters "a", "b" or "c" will be matched.

Examples

To give you an example how exclusions work with wildcards, following are some exclusion examples, including the Type selected and the string entered in the **Pattern** field to create the exclusion:

- To exclude files that have "confidential" in their name:
Type=**Contains** or **Exact**; Pattern=**confidential**
- To exclude files beginning with the letter x or y: Type=**Match**;
Pattern=**[xy]***

- 4 Once saved, exclusions are applied automatically, and all saved exclusions apply at the same time. To save and apply the exclusion, click **Apply**. When asked to confirm updating the exclusions list, click **Yes**.
- 5 To delete an exclusion, click the **Delete** button to the right of the exclusion you want to delete.

Note: This particular delete function does not have a confirmation message, so be sure you want to delete an exclusion before you click the **Delete** button.

- 6 When you are finished, click **Done** to return to the StorNext home page.

Truncation Exclusions

The Tools menu's **Truncation Exclusions** option enables you to specify files you want to exclude from the truncation process. The file path must be included when specifying the exclusion criteria.

Since paths are included in the criteria, this allows you to specify criteria which will affect all files within a directory. This basically allows an exclusion to be specified for a directory.

For example, you may want to exclude directories containing system files or files used during system login. When you create an exclusion for a directory, none of the files in that directory are truncated.

The process involves specifying directory paths as part of the criteria so StorNext knows how to locate and identify the files to exclude. You can create as many exclusion patterns as you like, and as your needs change you can delete unwanted exclusion patterns. These exclusions are stored in a file which StorNext checks when storing but *before truncating*.

Note: If you exclude a file and then later rename that file after it has been stored, the renamed file will continue to be excluded from truncation unless:

- the renamed file does not match exclusion criteria and is modified so that it gets stored again


OR

- you use the `fschfiat -t c` command to remove the exclusion from the file
-

Accessing Truncation Exclusions

To access the **Tools > Storage Manager > Truncation Exclusions** screen, choose **Truncation Exclusions** from the **Tools > Storage Manager** menu. Any previously saved exclusions are displayed.

Figure 48 Truncation Exclusions Screen

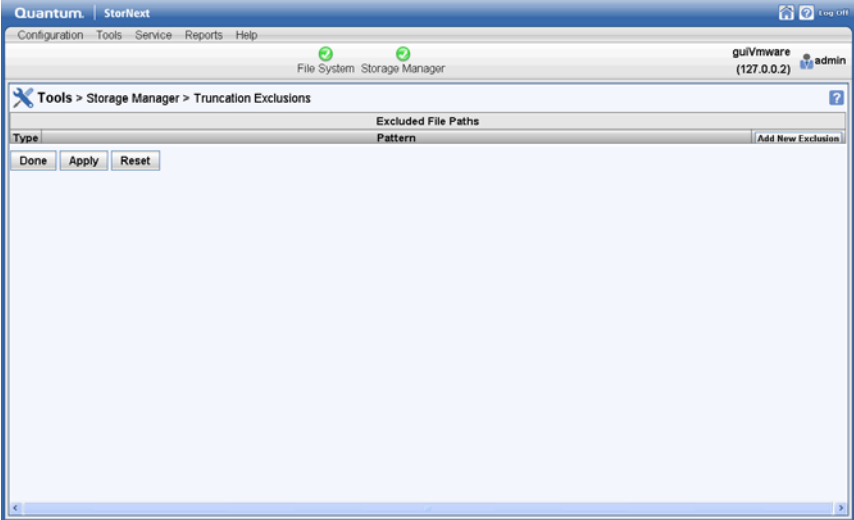


Adding an Exclusion Pattern

To add a new exclusion:

- 1 Click **Add New Exclusion**. The Exclusion screen appears.

Figure 49 Exclusion Screen

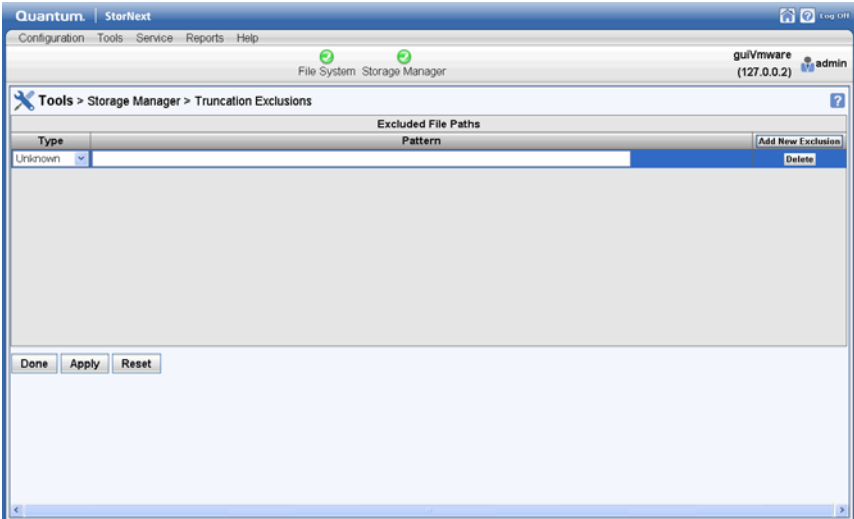

2 Choose from the **Type** pulldown list one of the following types of exclusions:

- **Unknown:** This type appears until you select a different type, and remains if you select no type.
- **Match:** File paths which match the string in the Pattern field are excluded. Wildcards can be used for this type. To enter an exclusion which includes all files in a directory, the directory name and a wildcard must be specified. For example, enter `/sn/foodir/*` to exclude all files in the directory `/sn/foodir`.

- **Match Path:** File paths which match the string in the Pattern field are excluded. Wildcards can be used for this type.

The difference between **Match** and **Match Path** is that slashes must be explicitly entered for the Match Path type. When using Match Path you cannot substitute a wildcard for a slash.

- **Begins With:** File paths beginning with the string in the Pattern field are excluded.
- **Ends With:** File paths ending with the string in the Pattern field are excluded.
- **Contains:** File paths containing the string in the Pattern field are excluded.
- **Exact:** Only file paths that *exactly* match the string in the Pattern field are excluded.

3 At the **Pattern** field, enter the search string for the file path. Depending on the exclusion type you selected, this could be a whole or partial path name for a file.

If you selected the Match or Match Path type, you can use the following wildcards at the Pattern field:

- **?** (question mark): Substitute any single character. For example, if you enter `t?p`, it will match "top" "tip" and "tap".
- ***** (asterisk): Substitute one or more characters. For example, if you enter `f*I`, it will match "ful" "fail" "foil" "fall" and "frail".
- **[]** (brackets): When you use this wildcard, it allows a set of characters to be specified. For example, if you enter `[abc]*`, any string beginning with the letters "a" "b" or "c" will be matched. When using brackets you can also specify a range by using the - (dash) character. For example, if you enter `file[1-4]`, the strings "file1" "file2" "file3" and "file4" are matched. You can also

specify a complement of characters to *not* match. For example, if you enter `[!abc]*`, any string that does not begin with the letters "a", "b" or "c" will be matched.

Examples

To give you an example how exclusions work with wildcards, following are some exclusion examples, including the Type selected and the string entered in the **Pattern** field to create the exclusion:

- Exclude files in directories that have "confidential" in their name: Type=**Contains** or **Exact**; Pattern=***confidential***
 - Exclude files in directories beginning with the letter x or y: Type=**Match**; Pattern=***/[xy]***
 - Exclude the files in a directory named "/private/confidential": Type=**Match Path**; Pattern=**/private/confidential***
- 4 Once saved, exclusions are applied automatically, and all saved exclusions apply at the same time. To save and apply the exclusion, click **Apply**. When asked to confirm updating the exclusions list, click **Yes**.
 - 5 To delete an exclusion, click the **Delete** button to the right of the exclusion you want to delete.

Note: This particular delete function does not have a confirmation message, so be sure you want to delete an exclusion before you click the **Delete** button.

- 6 When you are finished, click **Done** to return to the StorNext home page.

Tape Consolidation

The Tape Consolidation feature provides a way to automatically consolidate tape volumes which contain unused space that is no longer tracked in the Storage Manager database.

Previous releases of StorNext allowed you to consolidate tape space by manually running the `fsdefrag` (defragment tape media) command, but this functionality can now be scheduled to run automatically at specified times.

The Tape Consolidation process consists of three steps:


- 1 Setting configuration parameters by specifying criteria for determining which tapes are fragmented
- 2 Creating a schedule to clean old inactive versions of files on tapes
- 3 Creating a schedule for tape defragmentation

Setting Tape Consolidation Parameters

The first step in the tape consolidation process is to configure the feature so StorNext knows which tapes in your system qualify for consolidation.

- 1 Choose **Tape Consolidation** from the **Tools > Storage Manager** menu. The Tape Consolidation screen appears.

Figure 50 Tape Consolidation Screen

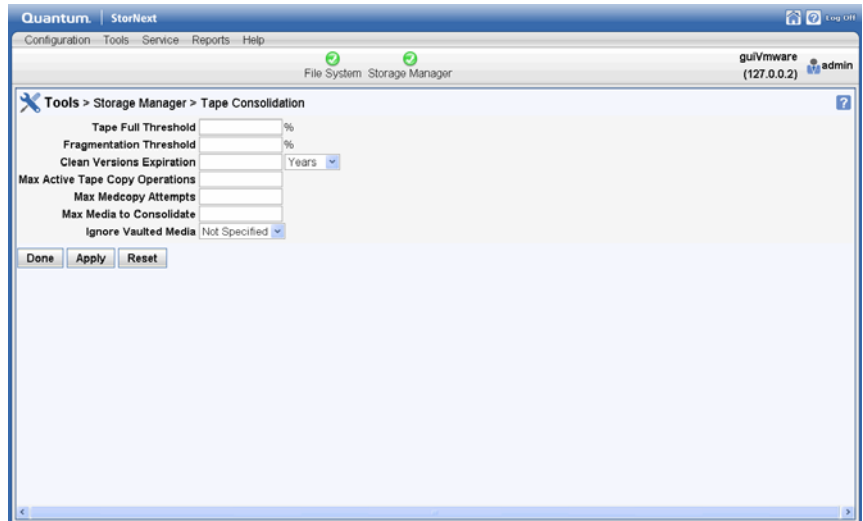

2 Enter the following fields:

- **Tape Full Threshold:** Specify the percentage at which tapes become candidates for consolidation. For example, enter **85** if you want tapes flagged for consolidation when they are 85% full.
- **Fragmentation Threshold:** Specify the percentage of fragmentation at which tapes become candidates for consolidation. For example, enter **15** if you want tapes flagged for consolidation when 15% of the tape becomes fragmented.

Note: This percentage indicates the amount of data written to the tape, not overall tape capacity. For example, suppose a tape has been written to the halfway point. Of that amount, only half the data is still tracked by Storage Manager. Therefore that tape has a fragmentation percentage of 50%, not 25%.

- **Clean Versions Expiration:** Specify the number of **Days, Weeks, Months** or **Years** after which you want to clean up versions for deleted or modified files.
- **Max Active Tape Copy Operations:** Specify the number of allowable concurrent active tape copy operations. Fragmented media are defragmented by copying the media to new media. Therefore, each copy operation uses two tape drives.
- **Max Medcopy Attempts:** Specify the maximum number of attempts before StorNext stops trying to copy a media experiencing copy failures.
- **Max Media to Consolidate:** Specify the maximum number of tape media which will be consolidated during one fsdefrag process.
- **Ignore Vaulted Media:** Enter **True** to ignore tape media in the vault, or **False** to include media in the vault.

Note: To be candidates for defragmentation, media must pass both the Tape Full Threshold AND Fragmentation Threshold percentages. If a media passes only one or the other threshold it will be ignored for consolidation.

3 Click **Apply** to save and apply the parameters you just entered.

- 4 When asked to confirm, click **Yes** to proceed or **No** to abort and return to the **Tape Consolidation** screen.
- 5 If you clicked Yes, a message informs you that the Tape Consolidation configuration was updated. Click **OK** to continue.
- 6 When you are finished configuring Tape Consolidation, click **Done** to return to the StorNext home page.

Scheduling Tape Cleaning and Defragmentation

The next steps in the Tape Consolidation process are to schedule version cleaning and defragmentation. The process for scheduling these operations is identical to scheduling any other process.

The defragmentation schedule item should normally be scheduled a few hours after the versions cleaning item. The two schedule items work together in managing out-of-date media contents. The clean versions item cleans up the database information for old inactive file segments, and the defragmentation item is used to replace media which have become fragmented due to these segments being cleaned.

Note: There is no default schedule for defragmentation, and the feature is off unless manually scheduled.

For more information about scheduling, see [Scheduler](#) on page 111.

Library Operator Interface


The StorNext Library Operator Interface allows you to perform media-related actions remotely from the library.

On the **Tools > Storage Manager > Library Operator Interface** screen you can view the following information about media in the library:

- **Media ID:** The unique identifier for each piece of media
- **Current Library:** The name of the library where media currently reside
- **Pending Library:** The name of the destination library to which the media action will be carried out

- **Reason:** The reason for performing the media action
 - **Media Location:** The current physical location of the media
 - **Action Required:** The action to be performed on selected media
- 1 Choose **Library Operator Interface** from the **Tools > Storage Manager** menu. The **Library Operator Interface** Screen appears.

Figure 51 Library Operator Interface Screen

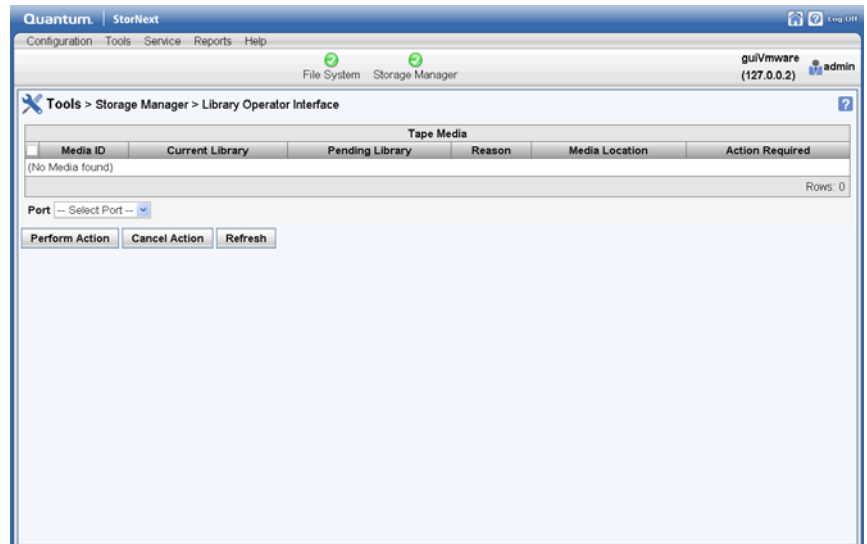

- 2 Select one or more media on which to perform the action indicated in the **Action Required** column, or click **All** to select all media.
- 3 At the **Port** field, select the port number for
- 4 Click **Perform Action** to initiate the action.
- 5 When the confirmation message appears, click **Yes** to proceed or **No** to abort.

Software Requests


The Software Requests menu option enables you to view software requests currently in process, and to cancel requests.

On the **Tools > Software Requests** screen you can view the following information about pending and currently running software requests:

- **ID:** The software request's identifier
- **Type:** The type of software request currently running
- **State:** The current state of the request
- **Time:** The time the software request was initiated
- **Priority:** The priority assigned to the software request

1 Choose **Software Requests** from the **Tools > Storage Manager** menu. The **Software Requests** Screen appears.

Figure 52 Software Requests Screen

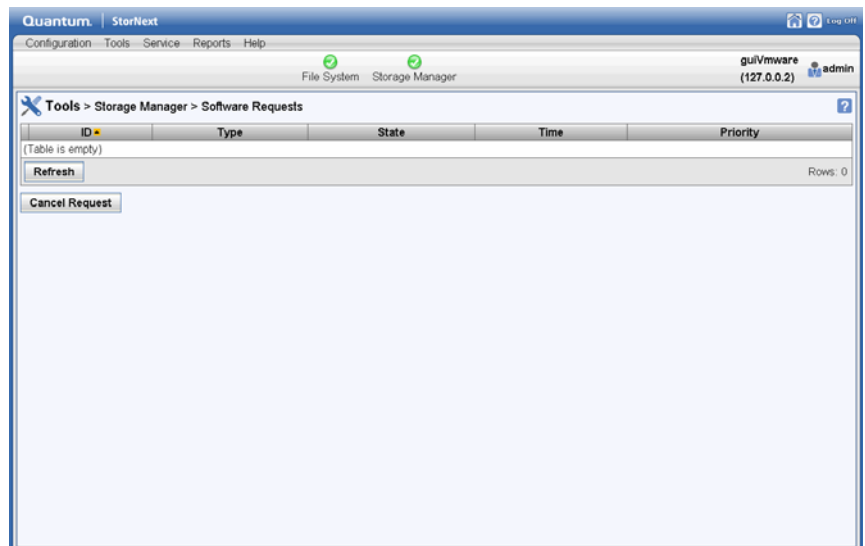

2 If desired, click Refresh to update the list of software requests.

3 To cancel a software request, select the request you want to cancel and then click **Cancel Request**.

- 4 When the confirmation message appears, click **Yes** to proceed or **No** to abort.

Scheduler

StorNext events are tasks that are scheduled to run automatically based on a specified schedule. The following events can be scheduled:

- **Clean Versions:** This scheduled event cleans old inactive versions of files.
- **Clean Info:** This scheduled background operation removes from StorNext knowledge of media.
- **Rebuild Policy:** This scheduled event rebuilds the internal candidate lists (for storing, truncation, and relocation) by scanning the file system for files that need to be stored.
- **Partial Backup:** By default, a partial backup is run on all days of the week the full backup is not run. Partial backups include database journals, configuration files, and file system journal files.
- **Full Backup:** By default, a full backup is run once a week to back up the entire database, configuration files, and the file system metadata dump file.
- **Health Check:** By default, health checks are set up to run every day of the week, starting at 7:00 a.m.
- **Tape Defragmentation:** This scheduled event defragments tapes to consolidate and free up space. You should schedule the clean versions event before the defragmentation event. Only tapes that meet the parameters entered on the **Tools > Storage Manager > Tape Consolidation** screen are included in the defragmentation process. (For more information, see [Tape Consolidation](#) on page 105.)

Each of these events (with the exception of Tape Consolidation) has a default schedule, but you can configure the schedules to suit your system needs. To change the schedule or add Tape Consolidation, see [Adding a Schedule](#) or [Editing an Existing Schedule](#).


Note: To ensure that scheduled StorNext tasks are started at the correct time, StorNext servers should be rebooted whenever changes are made to the system time.

Viewing a Schedule

The procedure for viewing an event's existing schedule is the same regardless of the event type.

- 1 Choose **Scheduler** from the **Tools > Storage Manager** menu. A list of currently scheduled events appears.

Figure 53 Scheduler Screen

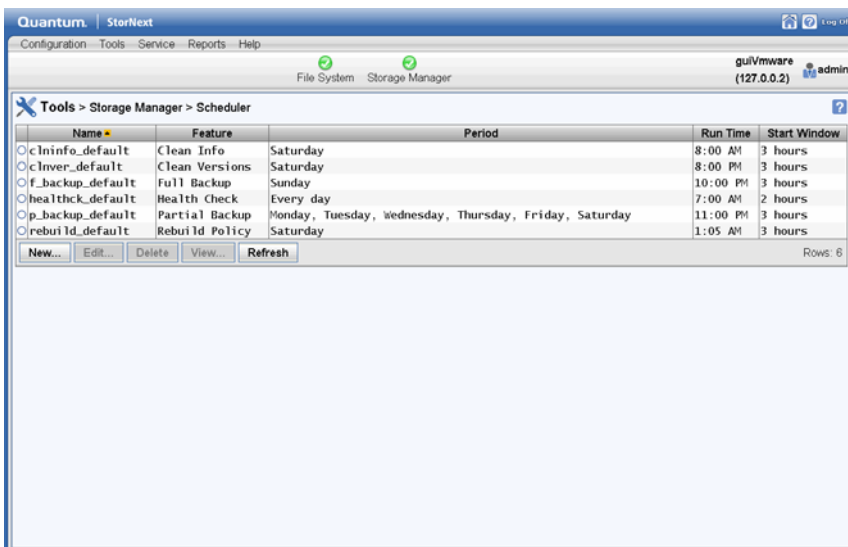

The screenshot shows the Quantum StorNext Scheduler interface. The window title is "Quantum StorNext" and the menu bar includes "Configuration", "Tools", "Service", "Reports", and "Help". The user is logged in as "admin" with the session ID "gul/vmware (127.0.0.2)". The main content area is titled "Tools > Storage Manager > Scheduler" and displays a table of scheduled events. The table has columns for Name, Feature, Period, Run Time, and Start Window. Below the table are buttons for "New...", "Edit...", "Delete", "View...", and "Refresh". The status bar at the bottom right indicates "Rows: 6".

Name	Feature	Period	Run Time	Start Window
<input type="radio"/> c.lninfo_default	Clean Info	Saturday	8:00 AM	3 hours
<input type="radio"/> c.lnver_default	Clean Versions	Saturday	8:00 PM	3 hours
<input type="radio"/> f.backup_default	Full Backup	Sunday	10:00 PM	3 hours
<input type="radio"/> healthck_default	Health Check	Every day	7:00 AM	2 hours
<input type="radio"/> p.backup_default	Partial Backup	Monday, Tuesday, Wednesday, Thursday, Friday, Saturday	11:00 PM	3 hours
<input type="radio"/> rebuild_default	Rebuild Policy	Saturday	1:05 AM	3 hours

- 2 Select the event you want to view, and then click **View**.
- 3 When you are finished viewing event details, click **Done**.
- 4 Repeat steps 2 - 3 to view additional events.


Adding a Schedule

Follow this procedure to add a new schedule.

- 1 If you have not already done so, choose **Scheduler** from the **Tools > Storage Manager** menu.

2 Click **New**. The **Scheduler > New** screen appears.

Figure 54 Scheduler > New
Screen

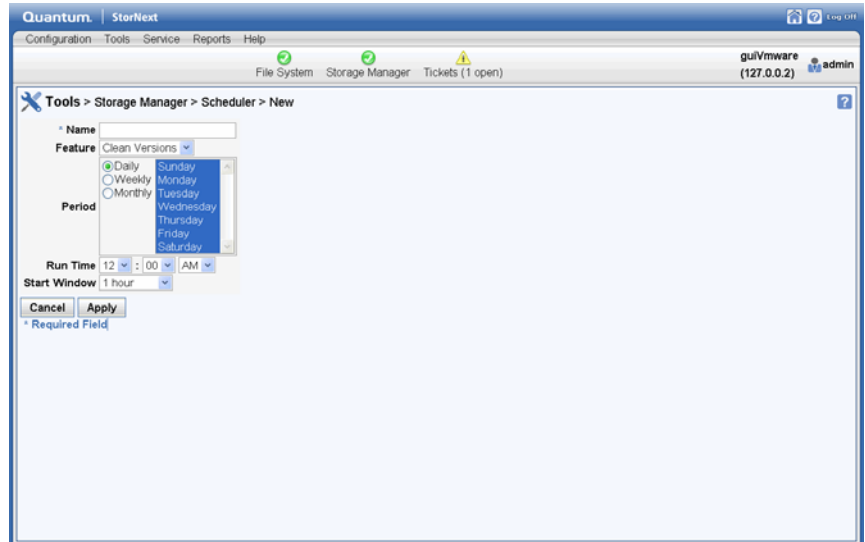

3 At the **Name** field, enter the name you want to assign to the new schedule.

4 Select one of the following schedulable event types from the Feature dropdown list:

- **Clean Versions**
- **Clean Info**
- **Rebuild Policy**
- **Partial Backup**
- **Full Backup**
- **Health Check**
- **Tape Defragmentation**

5 At the **Period** field, select the execution interval for the new schedule: **Daily**, **Weekly** or **Monthly**. You can also select multiple days by holding down the **Control** key as you click the day.

6 At the **Run Time** field, specify when you want the schedule to start. Enter the **hour**, **minute**, and **a.m.** or **p.m.**

- 7 At the **Start Window** field, specify the window in which you want the StorNext Scheduler to start the event. The Scheduler attempts to begin the event within the specified **Start Window** time (e.g., 30 minutes). If the event cannot begin at that time, the Scheduler tries again during the next cycle.
- 8 Click **Apply** to save the new schedule, or **Cancel** to exit without saving.
- 9 When a message informs you that the new schedule was successfully created, click **OK** to continue.

Editing an Existing Schedule

Follow this procedure to edit an existing schedule. The procedure for modifying an existing schedule is the same regardless of the event type.

- 1 If you have not already done so, choose **Scheduler** from the **Tools > Storage Manager** menu.
- 2 Select the schedule you want to modify, and then click **Edit**.
- 3 Change the schedule **Period** interval, **Run Time**, or **Start Window** as desired. You cannot change the schedule name or select a different feature (schedule type).
- 4 Click **Apply** to save your changes, or **Cancel** to exit without saving.
- 5 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 6 When a message informs you that the new schedule was successfully modified, click **OK** to continue.

Deleting an Existing Schedule

Follow this procedure to delete an existing schedule. The procedure for deleting an existing schedule for an event is the same regardless of the event type. Each event type has a default schedule. You must have at least one schedule, so you will not be allowed to delete a solitary schedule.

- 1 If you have not already done so, choose **Scheduler** from the **Tools > Storage Manager** menu.
- 2 Select the schedule you want to delete, and then click **Delete**.
- 3 When the confirmation message appears, click **Yes** to proceed or **No** to abort.

- 4 When a message informs you that the new schedule was successfully deleted, click **OK** to continue

Alternate Retrieval Location

In situations where file retrieval fails because the normal file copies cannot be retrieved from the machine on which StorNext Storage Manager resides, this feature enables you to retrieve a copy of the truncated file from a different machine.

For example, if StorNext creates two copies of each file, when retrieving a truncated file StorNext tries to retrieve Copy One and then Copy Two. If neither of these copies can be retrieved and this feature is not enabled, the retrieval fails. However, if this feature is enabled for the file system, after retrieving Copy Two fails Storage Manger tries to retrieve the file from the alternate machine you specified during feature setup.


This feature applies only to managed file systems that have at least one configured policy class.

For this feature to work correctly, it is your responsibility to make sure all files you might want to retrieve are copied to the alternate machine. Otherwise retrieval will fail when StorNext attempts to retrieve the file from the alternate location and cannot find the file.

Follow this procedure to configure an alternate retrieval location.

- 1 Choose **Alternate Retrieval Location** from the **Tools > Storage Manager** menu. The **Alternate Retrieval Location** screen appears.

Figure 55 Alternate Retrieval Location Screen

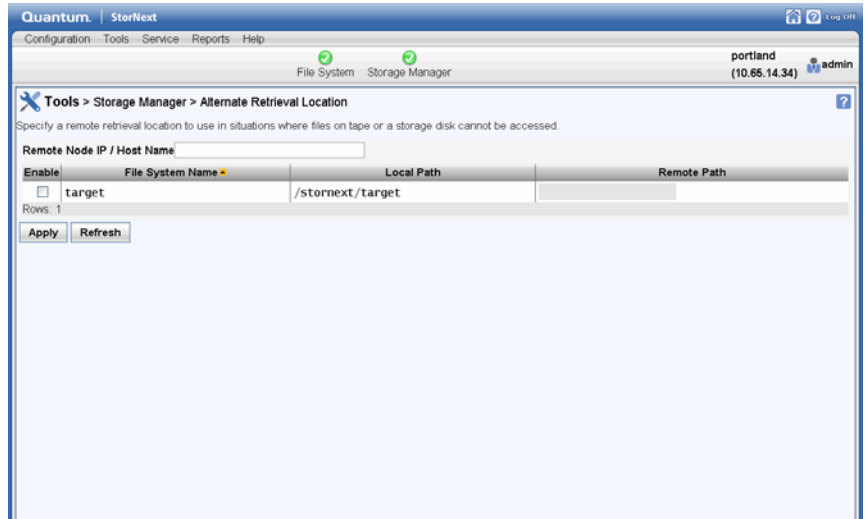

- 2 At the **Remote Node IP / Host Name** field, enter either the IP address or the host name of the remote server from which you would like to retrieve data.
- 3 Select **Enable** to activate the Alternate Retrieval Location feature.
- 4 At the field under the **Remote Path** heading, enter the directory path for the remote node (server).
- 5 Click **Apply** to save your changes, or **Cancel** to exit without saving.
- 6 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 7 After a message informs you that the alternate retrieval location was successfully added, click **OK**.

Distributed Data Mover (DDM)

StorNext 4.0 contains support for a new StorNext feature: Storage Manager Distributed Data Mover (DDM).

This section contains the following main topics related to DDM:

- [Distributed Data Mover Overview](#)
- [Installing the DDM Feature on Clients](#)
- [Accessing Distributed Data Mover](#)
- [Enabling DDM](#)
- [Managing DDM Hosts](#)
- [Host Priority](#)
- [Distributed Data Mover Reporting](#)
- [Disaster Recovery](#)

Distributed Data Mover Overview

Quantum developed the Distributed Data Mover feature to enhance the data movement scalability of its StorNext Storage Manager software. With this feature the data movement operations are distributed to client machines from the metadata controller, which can improve the overall throughput of data movement to archive tiers of storage.


Previously, the data mover process, `fs_fmover`, ran only on the metadata controller (MDC), allowing up to one `fs_fmover` process per tape drive or storage disk (SDisk) stream to run at one time.

Note: The DDM feature supports only storage disks on StorNext file systems, not on NFS.

The new feature expands data moving flexibility by transferring the mover process to clients that have access to the drives and managed file systems. The actual data moving process remains the same, with the added benefit that the load on the metadata controller is alleviated by moving those processes to clients.

The following diagram illustrates the data moving process when the Distributed Data Mover feature is enabled:

Distributed Data Mover Enabled:

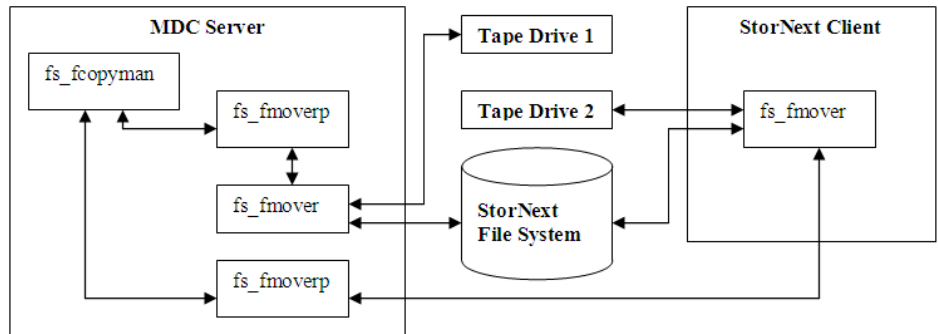

Legend:

- `fs_fcopyman`: Manages copy requests and invokes a mover proxy when copy resources have become available
- `fs_fmover`: The process that performs copy operations, either on the MDC or a client
- `fs_fmoverp`: The proxy for a mover that always runs on the MDC. This proxy kicks off and waits for an `fs_fmover` process, and then makes any needed database updates etc. when the mover completes.

Note: Proxies are used even in local-only operations.

Feature Highlights

The Distributed Data Mover feature provides the following benefits:

- Concurrent utilization of shared StorNext tape and disk tier resources by multiple Distributed Data Mover hosts
- Scalable data streaming
- Flexible, centralized configuration of data movement
- Dynamic Distributed Data Mover host reconfiguration
- Support for StorNext File System storage disks (SDisks)
- Works on HA systems without additional configuration

Distributed Data Mover Terms

Following are definitions for some terms as they pertain to the Distributed Data Mover feature:

- **Mover:** A process that copies data from one device/file to another. The process can run locally on the metadata controller or on a remote client. (See definitions for these terms below.)
- **Host:** Any server/client on the SAN. Any host can serve as a location for a mover to run as long as it meets the specifications listed in the Supported Operating Systems section below.
- **Metadata Controller (MDC):** The server on which the StorNext Storage Manager software is running. (The metadata controller host.) Also known as the local host, or the primary server on HA systems.
- **Remote Client:** A host other than the MDC.

Tape Devices and Persistent SCSI Reserve

The Distributed Data Mover feature uses persistent SCSI reserve, so all tape devices used with this feature must support the PERSISTENT RESERVE IN/OUT functionality as described in SCSI Primary Commands-3 standard (SPC-3). One implication is that LTO-1 drives cannot be used with the DDM feature.

StorNext 4.1.1 incorporates support for SCSI-3 persistent reservations for tape devices. SCSI-3 persistent reservation commands attempt to prevent unintended access to tape drives that are connected by using a shared-access technology such as Fibre Channel. Access to a tape drive is granted based on the host system that reserved the device. SCSI-3 persistent reservation enables access for multiple nodes to a tape device and simultaneously blocks access for other nodes.

Quantum recommends enabling SCSI-3 persistent reservations. Refer to parameter `FS_SCSI_RESERVE` in `/usr/adic/TSM/config/fs_sysparm.README` to direct the StorNext Manger to use SCSI-3 persistent reservations.

One implication of using SCSI-3 reservations is that all tape devices used must support the PERSISTENT RESERVE IN/OUT functionality as described in SCSI Primary Commands-3 standard (SPC-3).

A supported upgrade to StorNext 4.1.1 will maintain the existing SCSI tape reservation settings, SCSI-2 reservations or not SCSI tape

reservations. A new StorNext 4.1.1 installation will by default use SCSI-3 persistent reservations.

The StorNext Distributed Data Mover feature requires that SCSI-3 persistent reservations be used.

Verifying SCSI 3 Tape Drive Compatibility

A third-party utility is available to help you determine whether your tape devices are or are not compatible with SCSI-3 persistent reservations. This utility is called `sg3_utils`, and is available for download from many sites. This package contains low level utilities for devices that use a SCSI command set. The package targets the Linux SCSI subsystem.

You must download and install the `sg3_utils` package before running the following commands. In the following example, there are two SAN-attached Linux systems (`sfx13` and `sfx14` in this example) zoned to see a tape drive.

- **Step 1.** Register the reservation keys by running these commands:

```
[root@sfx13]# sg_persist -n -d /dev/sg81 -o -I -S  
0x123456
```

```
[root@sfx14]# sg_persist -n -d /dev/sg78 -o -I -S  
0xabcdef
```

- **Step 2:** List the reservation key by running this command:

```
[root@sfx13]# sg_persist -n -k /dev/sg81
```

- **Step 3.** Create reservation by running this command:

```
[root@sfx13]# sg_persist -n -d /dev/sg81 -o -R -T 3 -  
K 0x123456
```

- **Step 4.** Read reservation by running this command:

```
[root@sfx14]# sg_persist -n -d /dev/sg78 -r
```

- **Step 5.** Preempt reservation by running this command:

```
[root@sfx14]# sg_persist -n -d /dev/sg78 -o -P -T 3 -  
S 0x123456 -K 0xabcdef
```

- **Step 6.** Release reservation by running this command:

```
[root@sfx14]# sg_persist -n -d /dev/sg78 -o -L -T 3 -  
K 0xabcdef
```

- **Step 7.** Delete key by running these commands:

```
[root@sfx13]# sg_persist -n -d /dev/sg81 -o -o -K  
0x123456
```

```
[root@sfx14]# sg_persist -n -d /dev/sg78 -o -o -K  
0xabcdef
```

Limitations

Quantum does not currently support using multiple paths to tape drives. Also, VTL does not support SCSI-3 persistent reservations.

Installing the DDM Feature on Clients


You must install the `snfs-mover` rpm on each client you want to act as a distributed data mover. Follow these installation steps for each client:

- 1 Log in as root.
- 2 Obtain the .tar archive from the metadata controller.
- 3 Extract the contents of the .tar archive by running the command `tar -xvf sn_dsm_linuxRedHat50AS_x86_64_client.tar`.
- 4 Install the rpms in the .tar archive.
 - For a new client installation, run either the command `rpm -ivh *.rpm` or `rpm -Uvh *.rpm`
 - For a client upgrade, run the command `rpm -Uvh *.rpm`

Accessing Distributed Data Mover

To enter DDM settings and manage hosts and devices, choose **Distributed Data Mover** from the **Tools > Storage Manager** menu. The **Configuration > Distributed Data Movers** screen appears. This screen shows any previously configured DDM-enabled hosts, managed file systems, tape drives and storage disks, as well as the current status: **Enabled**, **Not Configured**, **Not Enabled** or **Internally Disabled**.

Figure 56 Configuration >
Distributed Data Mover Screen

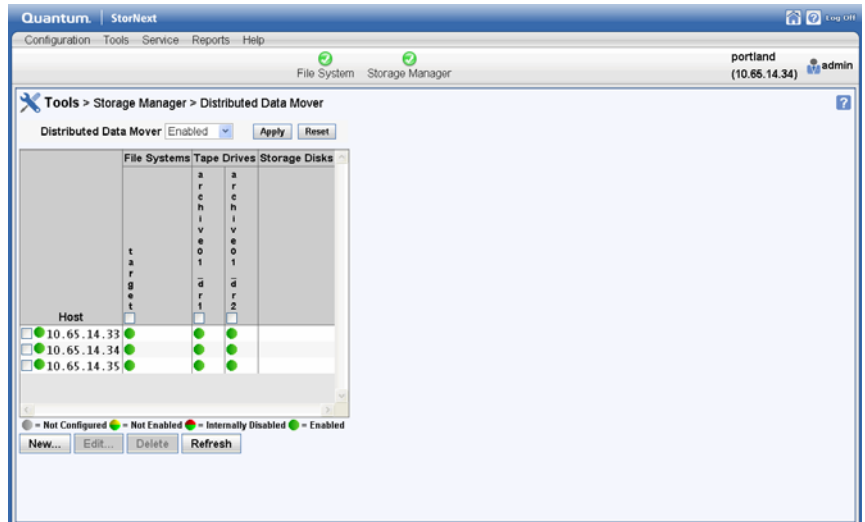

“Configured” versus “Enabled”

“Configured” means a host or device has been added to the list of hosts and devices to be used for DDM operations. DDM does not recognize a host or device until it has been configured.

“Enabled” means a host or device has been configured and is ready to be used for DDM operations. A host or device cannot be enabled until it is first configured, but a configured host or device may be either enabled or disabled.

Enabling DDM

The DDM screen’s **Use Distributed Movers** field allows you to enable or disable the DDM feature, or to enable a mode called “Threshold.”

When DDM is disabled, data moving responsibilities rest solely on the primary server. When DDM is enabled, data moving responsibilities are distributed among the hosts you specify as described in [Managing DDM Hosts](#) on page 123.

When you select the Threshold option, the local host (i.e., the metadata controller) is given a preference over the remote clients. The characteristics of this option are:

- Mover processes will not be assigned to a remote client until a threshold of local movers are already running.
- After reaching the threshold of local running movers, the “all” option is used for allocating new mover requests.
- If not specified, the default value for the threshold is zero. This means if a value is not set for the threshold via `fsddmconfig` the system will effectively run in “all” mode.

You should use the Threshold option only if you want most data moving operations to run locally on the MDC.

After you choose **Disabled**, **Enabled**, or **Threshold**, click **Update** to save your selection.

Managing DDM Hosts


The **Distributed Data Mover** screen enables you to add and configure a new host for DDM, or change settings for a previously configured host. You can also delete a host from the list of DDM-enabled hosts.

Adding a Host

- 1 If you have not already done so, choose **Distributed Data Mover** from the **Tools > Storage Manager** menu.

- 2 Click **New**. Fields appear where you can enter host information

Figure 57 DDM Screen New Host

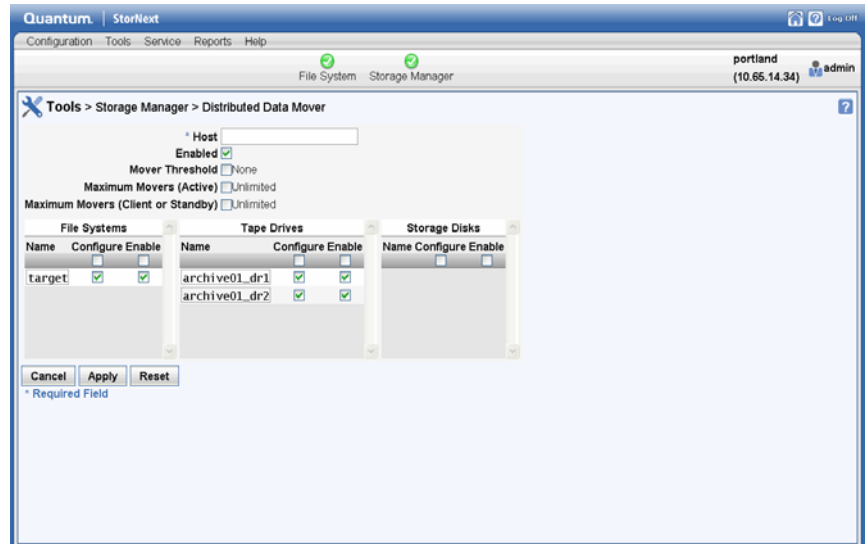

- 3 At the **Host** field, enter the name or IP address of the host you are adding.

Note: If you use the IP address instead of the host name you must *continue* using the IP address and cannot switch between using IP addresses and host names. For example, you can't configure a host using the IP address and then try and configure a device on the host using the host name.

- 4 Enter the remaining fields in the upper portion section of the screen:
 - **Enabled**
 - **MDC Mover Threshold**
 - **Max Movers (active MDC)**
 - **Max Movers (client or standby MDC)**

For information about what to enter at these fields, see the online help.

- 5 Under the corresponding headings, select **Configure** and/or **Enable** for the **Managed File Systems**, **Tape Drives** and **Storage Disks** you want to include in DDM processing.
- 6 To add your selections to the new host, click **Apply**. (To exit without saving, click **Cancel**. To remain on the screen but clear your entries, click **Reset**.)
- 7 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 8 After a message informs you that your changes were successfully saved, click **OK** to continue.

Editing a Host or Devices

- 1 If you have not already done so, choose **DDM** from the **Tools > Storage Manager** menu.
- 2 Select from the **Hosts** list the host you want to edit.
- 3 Click **Edit**.
- 4 Modify the host configuration as desired.
- 5 If desired, select or remove managed file systems, tape drives and storage disks.
- 6 Click **Apply** to save your changes.
- 7 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 8 After a message informs you that your changes were successfully saved, click **OK** to continue.

Deleting a Host

- 1 If you have not already done so, choose **DDM** from the **Tools > Storage Manager** menu.
- 2 Select from the **Hosts** list the host you want to delete.
- 3 Click **Delete** to exclude the host from DDM operation. (Clicking **Delete** does not actually delete the host from your system, but rather excludes it from the list of DDM hosts.)
- 4 When the confirmation message appears, click **Yes** to proceed or **No** to abort.

- 5 After a message informs you that the host was successfully deleted, click **OK** to continue.

Host Priority

When all hosts are chosen, no special preference is given to the local host. Following are the operating characteristics when all hosts are chosen:

- Internally within the StorNext Copy Manager (fs_fcopyman) there will be a list of hosts to use (that is, the local host and the remote clients). At this time there is no way to specify the order in which hosts appear in the list.
- For each host in the list, the following information is tracked:
 - The number of movers currently running on the host
 - The time of the last assignment
 - Whether the host is currently disabled
- When it is time to choose a host, a single pass through the host list is made. Hosts are picked based on the following criteria:
 - 1 The first valid host in the list will be selected. A host is considered valid if:
 - It is currently enabled
 - The devices needed for the copy operation are also currently enabled on the host
 - 2 The next host will be skipped if not valid.
 - 3 The next host in the list will be skipped if the number of running movers on that host is greater than the current selection.
 - 4 The next host will replace the current selection if the number of running movers on that host is less than the current selection.
 - 5 The next host will replace the current selection if the number of movers is equal to the current selection AND the time of last assignment is older than the current selection's.

Criteria 2-5 are repeated for the remaining hosts in the list. Upon completion, the host with the fewest running movers is selected. If there is a tie, the host that has been used the least recently is chosen. (A host that was *not* the least recently used may be chosen if its movers completed quickly compared to the others.)

Note: If a host has fewer drives and all other hosts have multiple drives (for example, two drives versus ten,) the host with the fewer drives will almost always be chosen for operations on those two drives because it is likely to have the fewest running movers.

Distributed Data Mover Reporting

A DDM Report which shows current configuration information and activity is available from the **Reports** menu. For more information about the DDM report, see [The Distributed Data Mover Report](#) on page 239.

Disaster Recovery

If disaster recovery becomes necessary, contact Quantum Technical Support and refer them to CR 28279 for the updated instructions.



Chapter 6

Replication and Deduplication

StorNext incorporates replication and deduplication technologies which can dramatically improve storage efficiency and streamline processing.

This chapter provides the following topics pertaining to these two technologies:

- [Replication Overview](#)
- [Replication Terms and Concepts](#)
- [Some Replication Scenarios](#)
- [Configuring Replication](#)
- [Running Replication Manually \(Optional\)](#)
- [Replication Statuses and Reporting](#)
- [Troubleshooting Replication](#)
- [Data Deduplication Overview](#)
- [Setting Up Deduplication](#)
- [Data Deduplication Functions](#)

Replication Overview

This section provides some background information that will help you understand how replication is configured and how processing occurs.

Replication Configuration Overview

StorNext Replication makes a copy of a source directory and sends the information to one or more target directories. The target directories may be on other host machines, or may be on the same host as the source directory.

Replication behavior is defined by a *Replication/Deduplication Policy*. (The other type of StorNext policy is a *Storage Manager Policy*, which governs how StorNext Storage Manager works).

Here are some important facts about StorNext Replication/Deduplication policies.

- A replication/deduplication policy exists on only one SNFS file system. For example, a policy in a file system called `/stornext/sn1` can be used only to replicate directories in that file system. A separate policy would be needed to replicate directories from file system `/stornext/sn2`.
- If a replication/deduplication policy will be used in any file system on a machine, you must configure a *blockpool* for that machine. The blockpool for a machine contains data (called blocklets) if the Deduplication feature is used, but the blockpool must be configured for replication use even if you do not use deduplication.
- A policy may be applied to one directory or more than one directory in the file system.
- A single policy can define behavior for replication sources and targets, as well as for deduplication. This single policy can also define the directories affected by the policy.
- However, it is often convenient to configure a policy that does primarily one thing. For example, you could create a policy that controls replication source behavior. Such a policy might be called a "replication source policy" or a "source policy," even though the policy could be configured to define other actions.

When configuring replication you must configure a policy for the replication source, and another policy for the replication target. You typically configure the replication source by creating a new policy for that file system. You typically configure the replication target by *editing the policy named "target"* for the file system on the target host machine.

This is an important distinction:

- Configure the replication source by *creating a new policy*
- Configure the replication target by *editing the "target" policy*

Note: When the replication source is on a different machine than the replication target (which is a typical situation,) you must use two instances of the StorNext GUI: one instance connected to the source machine, and another instance connected to the target machine.

Configuring replication is discussed in more detail in the section [Configuring Replication](#) on page 144.

Replication Process Overview

The actual replication process occurs in two stages:

- 1 **Data Movement Stage:** In this stage StorNext moves the data for files from the source file system to the target file system. Data movement occurs continuously as files are created or modified in a source directory.

Note: A configuration option allows this "continuous" data movement to be disabled during periods when the host machine or the network may be busy.

Data movement occurs in one of the following two ways.

- **Deduplicated Data:** If deduplication has been enabled for the policy that controls the source directory, deduplicated data moves from the source host machine to the target host. With deduplication enabled there may be less data moved than if the entire file were copied. This is because for deduplicated replication, only the unique deduplicated segments need to be copied.
- **Non-deduplicated Data:** If deduplication is not enabled for the policy that controls the source directory, the entire file is copied


from the source directory to the target host. The entire file is copied whenever a file is created or modified.

When data movement is in progress or even after it has just completed, the replicated files may not be visible yet in the target file system's directories. Replicated files become visible in stage 2.

- 2 File System Namespace Realization Stage:** In this stage StorNext enumerates all the files in the source directory and recreates the file name and subdirectory structure (the *namespace*) on the target file system. Unlike in the Data Movement Stage, this stage happens only at scheduled times, or when namespace realization is manually initiated by the administrator.

The following illustration shows in simple terms how replicated data flows from the one replication source to one replication target.

Figure 58 Replication Process

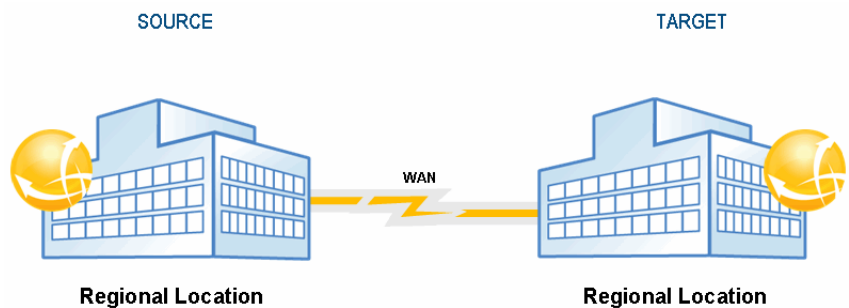

Files Excluded From Replication

Certain files may not be included in the replication process for various reasons. For example, a file that is open for read-only would be replicated, but a file that is open for write (including all of the various varieties of "write"), would not be replicated.

To determine which specific files were not included in the replication process, see the **Replication/Deduplication Completion Report**, which is accessible from the **Replication/Deduplication Policy Summary Report**. For more information about Replication reports, see [Replication Deduplication Reports](#) on page 240.

Here are some situations in which a file may be excluded from the replication process:

- Files that were truncated by Storage Manager before a replication policy was set up on a directory are not replicated. If you have an existing directory on which Storage Manger has been running and files are truncated, the files will not replicate from the truncated state. They must be retrieved from tape first. Once they are retrieved they will become candidates for replication and will not be truncated again until they have been either deduplicated or replicated (in the case of non-deduplication replication).
- Named pipes and device special files are not replicated.
- In both deduplication and non-deduplication replication, the completion report would mention if the file contents changed during namespace replication. This means that the replicated file on the target may represent an intermediate state taken during replication.

Replication Terms and Concepts

This section contains terms and concepts related to replication. Some terms have already been mentioned in the context of explaining replication and how it works. For these terms that have already been mentioned, this section contains a more complete, expanded definition.

Namespace Realization

Namespace refers to the directory structure which contains replicated data. Replicated data is always transferred separately from namespace data (although some small file data is transferred along with the namespace).

Namespace realization refers to the process in which the replicated directory structure (the namespace) appears on the replication target.

Because file data and namespace data is transferred separately, in some situations it might take longer for replicated data to complete transferring than for the namespace realization to complete. This is especially likely to happen if there is a backlog of file data waiting to be transferred at the time when namespace is either scheduled to run or is manually initiated.

Blockpool

The *Blockpool* is a data repository on the target. A blockpool is required on each machine used for replication or deduplication. If you use only replication, the blockpool file system can be small. If you configure deduplication as well as replication, the blockpool file system must be larger: at least large enough to hold the pool of deduplicated data segments.

When you configure StorNext for the first time, the Configuration Wizard enables you to specify the name of the file system you want to use for the blockpool.

Note: Once you specify the file system on which the blockpool resides, you cannot later choose a different blockpool file system. Use care when specifying the blockpool file system.

Blackout Period

A *Blackout* is a period during which replication does not occur. You may schedule replication blackouts for periods in which you do not want replication data transfers to occur on a busy network. For example, an administrator may create a blackout during periods when WAN usage and traffic is the heaviest. In this situation replication might run after hours when WAN usage and traffic would be much lower.

Replication Source Policy and Replication Source Directory

A *replication source policy* is a replication/deduplication policy that has "Outbound Replication" turned On via the policy's Outbound Replication tab.

The policy also has a Source Directories tab. The directories specified on this tab will be replicated, and these directories are called *replication source directories*.

Replication Target Directory

A *replication target directory* is the location to which replicated data is sent. The replication target may be a directory on a separate host machine, or it may be a directory on the source host machine. Regardless of where the target directory resides, it is very important that you use the replication target directory *only* for replicated data. Also, *do not allow users to modify the files in the replication target directories*.

When creating replication target directories, remember that the target directory must be *at least* as large as the sum of all replication source directories from which replicated data is sent. For example, if you have two source directories that are both 100GB, your replication target directory must be at least 200GB.

Replication Schedule

You can specify a *replication schedule* to define when the file system namespace realization should occur for an outbound replication schedule. For example, you might specify that you want namespace realization to occur at 6am and 6pm every day.

If you do not specify a replication schedule, you must manually run the replication policy whenever you want the realization to occur.

Replication Copies

Replication Copies is the number of copies of replicated data saved on the target. StorNext currently supports 1 to 16 replication copies per target. The number of replication copies is entered or modified in replication policies.

Bandwidth Throttling

Bandwidth Throttling refers to limiting the receive rate and transmit rate for replicated data (Replication Stage 1). This StorNext feature allows network administrators to specify (in bytes per second) a ceiling for incoming and outgoing replicated data. When bandwidth throttling is enabled, replicated data will not be transmitted or received at a rate higher than the specified maximum. Bandwidth throttling is a useful tool for controlling network traffic.

Multilink

StorNext provides support for *Multilink* configurations, which means you can have multiple connections on one network interface card (NIC), or even multiple connections on multiple NICs. StorNext provides a tool that shows you the NICs on your system, and allows you to specify the number of channels per NIC. On this same screen you can specify the NICs you want enabled for replication.

One advantage of using multiple NICs (or multiple channels on one NIC) is higher aggregate bandwidth because you can have multiple parallel paths. For this reason, multilink is valuable for load balancing.

Note: An alternative to StorNext Multilink is to use the Linux bonding driver to enslave multiple Ethernet interfaces into a single bond interface. This is a Linux feature, not a StorNext feature, but is supported by the StorNext software.

Virtual IP (vIP)

Virtual IP or *vIP* is similar to an alias machine name. StorNext uses virtual IP addresses to communicate with machines rather than using the physical machine name. Virtual IPs are required in HA (high availability) environments, and are also used for multilink NICs.

Your network administrator can provide you with the virtual IP addresses and virtual netmasks you need for your system.

Note: If your replication source policy or target policy is an HA system, you must specify the vIP address in the field labeled "Address for Replication and Deduplication" on the **Outbound Replication** tab for the policy named "global" on each file system for which you will use replication. The default value for this field is "localhost".

Remember that each StorNext file system will have a policy named "global," and you should edit this field for each of those policies named "global."

Some Replication Scenarios

StorNext provides replication support to meet a variety of needs. This section describes some common replication scenarios.


Scenario 1: Simplest Replication

In this simple replication scenario, the host machine `host1` contains a StorNext file system called `/stornext/fs1/`. Host machine `host2` has a StorNext file system called `/stornext/fs2/`.

In this scenario we can replicate directory `/stornext/fs1/video` on `host1` to file system `/stornext/fs2` on `host2`. Replicated files will appear in the directory `/stornext/fs2/video`, which is the default location on `host2`.

The following graphic illustrates replication scenario 1.

Figure 59 Replication scenario 1

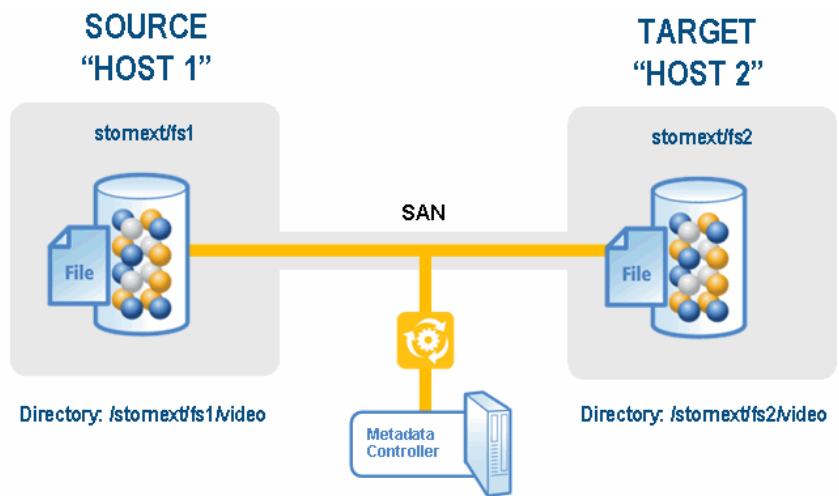

Scenario 2: Replicating Multiple Copies in the Same Target File System

In this scenario the directory `/stornext/fs1/video` on `host1` is again replicated to file system `/stornext/fs2` on `host2`. However, when the namespace realization occurs we want to retain the previous replicated target directories.

For this scenario assume that we want to keep four copies of the replication target directory. So, in file system `/stornext/fs2` on `host2` we will find these four directories:


- `/stornext/fs2/video` (Contains the most recent realization)
- `/stornext/fs2/video.1` (Contains the second-most recent realization)
- `/stornext/fs2/video.2` (Contains the third-most recent realization)

- /stornext/fs2/video.3 (Contains the fourth-most recent realization)

When using replication according to this scenario, in the StorNext GUI use the "Copies to Keep on Target" box on the **Outbound Replication** tab to enable multiple copies.

The following graphic illustrates replication scenario 2.

Figure 60 Replication Scenario 2

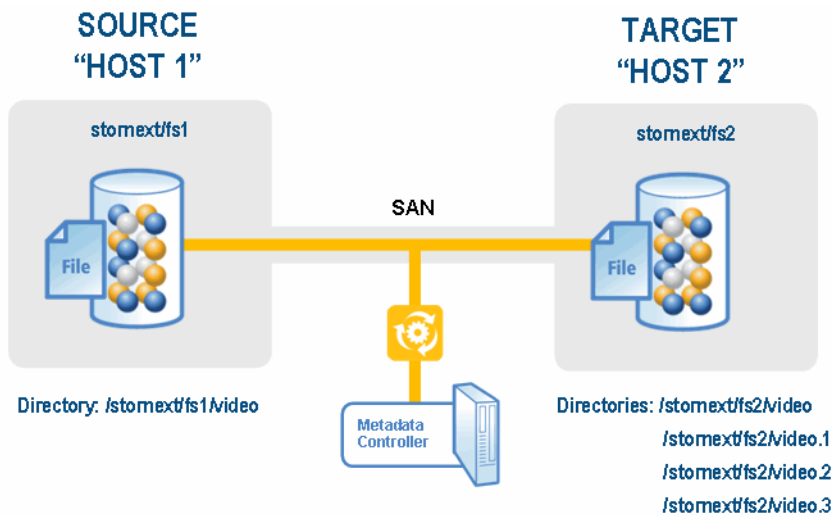

Question: Why would we want to keep multiple directories containing replicated data?

Answer: To save previous versions of the replicated directory. If you maintain only a single directory, the directory is overwritten each time replication occurs. For example, if replications happen daily at midnight, each of the replicated target directories will contain the contents of the source directory from that day's midnight replication.

You may keep from 1 to 16 copies on the target for each source directory.

Question: Will keeping extra copies use a lot of extra disk space on the target?

Answer: Not necessarily. For example, if file `video/ myTVshow.mov` has not changed for the last 4 replications, then the four files would be:

- /stornext/fs2/video/myTVshow.mov

- /stornext/fs2/video.1/myTVshow.mov
- /stornext/fs2/video.2/myTVshow.mov
- /stornext/fs2/video.3/myTVshow.mov

All of these files share the same data extents in the file system. An even greater space saving can be realized by enabling deduplication for replication, but using this feature is outside of the scope of the current scenario discussion.

Scenario 3: Replicating to Multiple Target Hosts / File Systems

In this scenario we replicate directory /stornext/fs1/video on host1 to file system /stornext/fs2 on host2 and to file system /stornext/fs3 on machine host3. Replicated files will appear in the target directories /stornext/fs2/video on host2 and in /stornext/fs3/video on host3.


In this scenario we can also use the "Copies to Keep on Target" option. When "Copies to Keep on Target" is specified in a replication source policy, multiple copies are retained in each of the target file systems.

A replication source policy may specify up to three target hosts.

A target host may received replicated data from up to 5 source hosts.

The following graphic illustrates replication scenario 3.

Figure 61 Replication Scenario
3

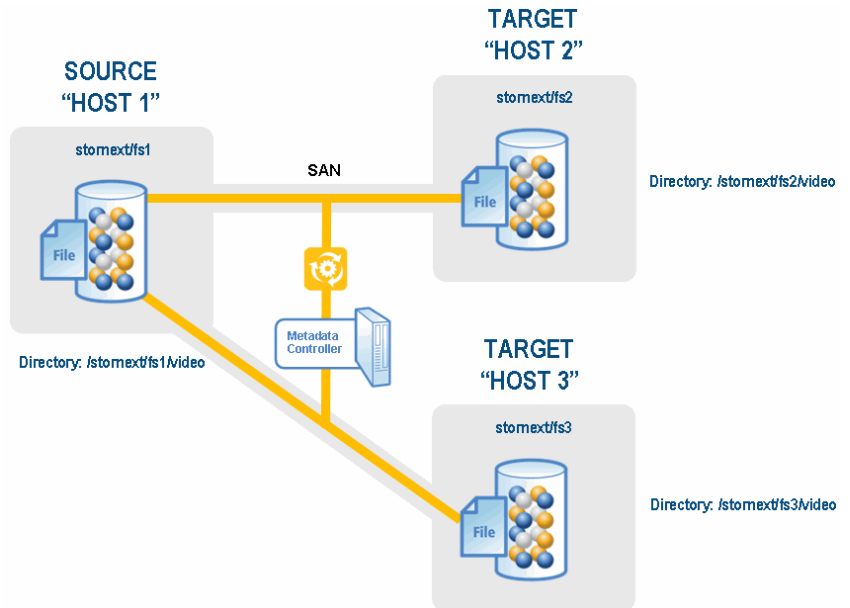


Additional Replication Possibilities

Here are some other possible replication combinations StorNext supports:


- Replication of a directory from one source host to multiple target hosts and/or multiple target file systems.

Figure 62 Replicating From
One Source to Multiple Targets

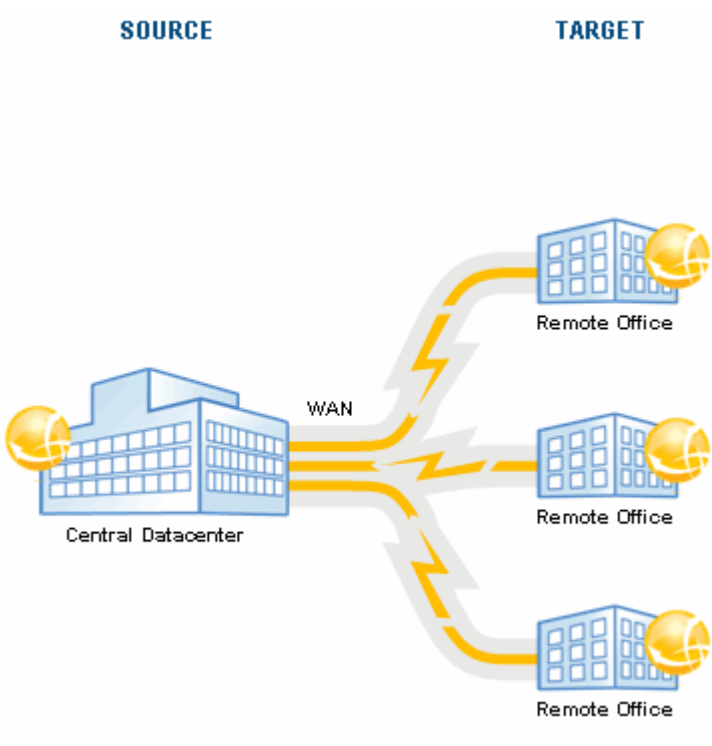

- Replication from multiple sources hosts or file systems to a single target host and file system.

Figure 63 Replicating From
Multiple Sources to One Target

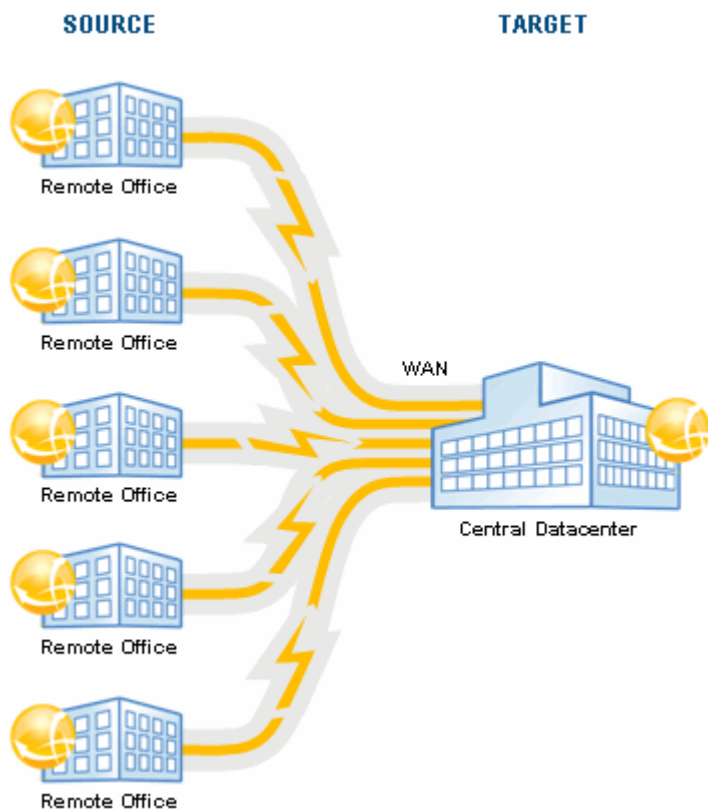

- Replication on HA systems - the source host and/or the target host can be an HA pair.
- Replication with Storage Manager, where replicated data is moved to tape from either the source directory or the target host/file systems.
- Replication plus deduplication (in combination with any of the three source-to-target setups), with or without Storage Manager.

When you are first using replication, Quantum recommends beginning with simple one-to-one replication (Scenario1).

Non-Supported Replication Between Source and Target

Replicating simultaneously between a replication source and target is not currently supported by StorNext. When configuring replication, be sure to avoid this particular scenario.


Example

In this non-supported configuration, Machine host1, file system fs1, directory video1 replicates to Machine host2, file system fs2, directory video2

While at the same time

Machine host2, file system fs2, directory video2 replicates to Machine host1, file system fs1, directory video1

Figure 64 Non-Supported Replication From Source to Target

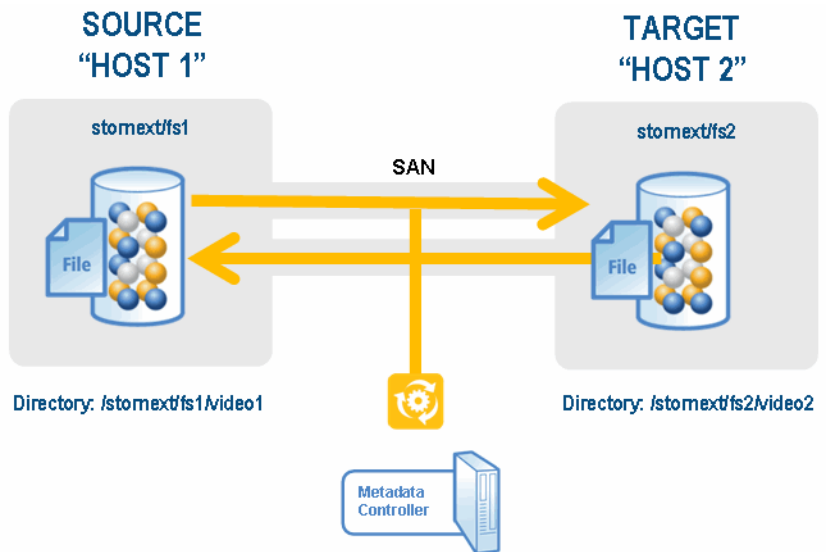

Non-Supported "Chained" Replication

"Chained replication" is replicating from source to a target and then to another target, and so on. This type of replication is not currently supported by StorNext. For example, you cannot replicate from A to B to C to D, or from A to B to B. When configuring replication, be sure to avoid this particular scenario.

Chained replication should not be confused with replicating from one source to multiple targets, which *is* supported. (See [Additional Replication Possibilities](#) on page 140.)

Configuring Replication

This section describes how to configure simple one-to-one replication from one source directory on one file system to one target file system. The source and target StorNext server computers can be the same machine, standalone servers, or High Availability (HA) redundant servers. When replication-target file systems are on an HA Cluster, it is best to convert the cluster to HA before configuring replication source policies that point to them. This allows the use of the virtual IP (vIP), which is required for HA configurations.

Additional configuration options for StorNext features such as HA or Replication with Storage Manager are also covered.

Before you begin configuring, make sure you have the Replication and/or Deduplication licenses required for these features. If you are using an HA configuration, basic StorNext single-server or HA Clusters should already be set up. (For more information, see [Chapter 3, The Configuration Wizard](#)).

These instructions assume you are using the StorNext Configuration Wizard and have already completed the first three steps: **Welcome**, **Licenses**, and **Name Servers**.


Step 1: Create Source and Target File Systems

After you complete the first three Configuration Wizard steps, the first replication step is to create file systems: the blockpool file system(s), and the source and target file systems you plan to use.

Note: Although StorNext supports replicating from multiple source hosts and file systems to multiple target hosts and file systems, for simplicity this procedure describes how to replicate between one source and one target file system on the same host.


- 1 If you have not already done so, launch the StorNext Configuration Wizard and proceed through **Welcome**, **License** and **Name Servers** steps to the **File System** step.
- 2 The **Configuration > File System** screen appears.
- 3 On the Configuration > File System screen, click **New**. The **Configuration > File System > New** Screen appears.

Figure 65 Configuration > File System > New Screen

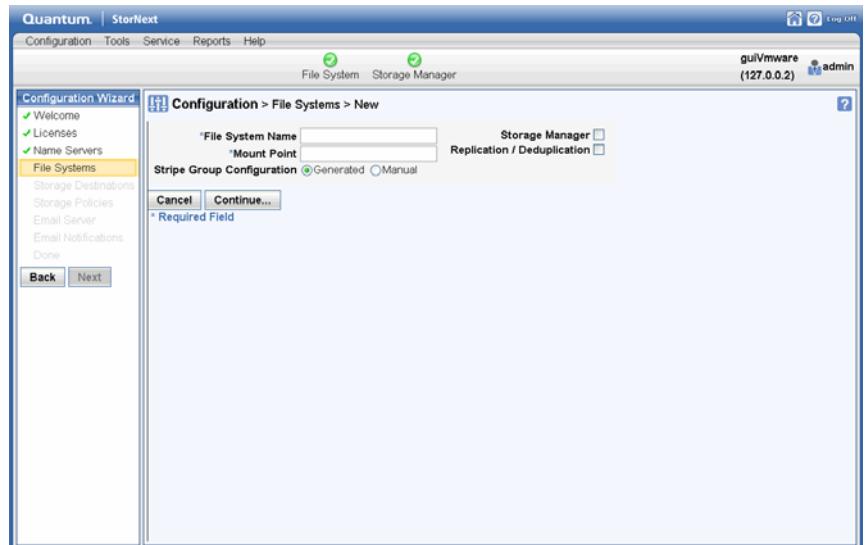


- 4 At the **File System Name** field enter the name of a file system to be used as a replication source. A default mount-point path automatically appears but you can change this mount point if you wish.
- 5 Choose the **Replication/Deduplication** option. A warning message alerts you that "A blockpool has not been created." Disregard this message for now because you will create the blockpool file system in the [Step 2: Setting up the Blockpool](#).
- 6 Make sure the **Generate** option is selected, and then click **Continue** to proceed.

Figure 66 Configuration > File System > New Screen 2

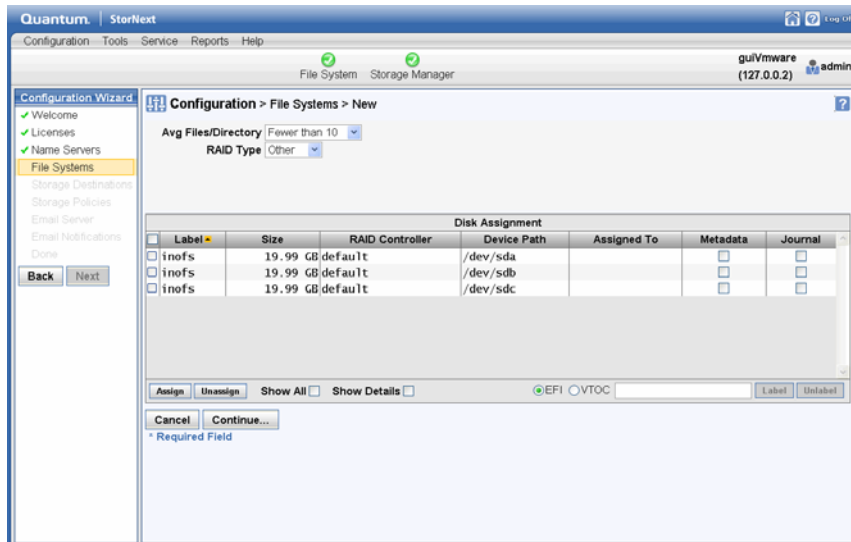

- 7 Select a set of LUNs for the file system, and then click **Assign**.
- 8 Click **Continue**.

Figure 67 Configuration > File System > New Screen 3

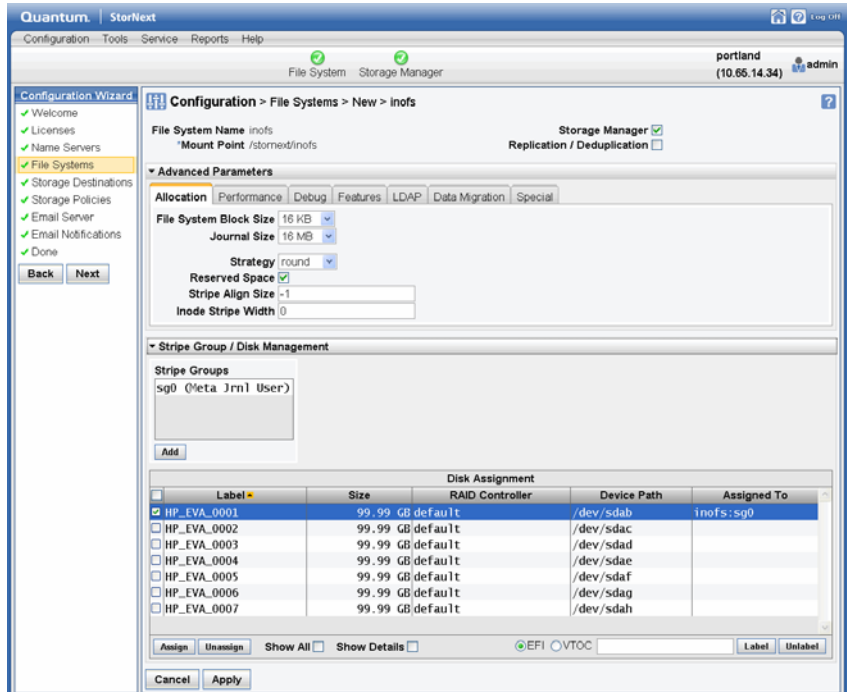

- 9 If desired, click the arrows beside the **Advanced Parameters** and **Stripe Group/Disk Management** headings to view information.
- 10 Click **Apply** to save the new file system. (For more information about creating file systems, see [Step 4: File Systems](#) on page 34.)

Creating a Target File System and Blockpool File System

- 1 Repeat the process (steps 1 - 8) and create the file system you intend to use as a target for replication on this same server.
- 2 Configure another file system for the Blockpool that has neither Data Migration nor Replication/Deduplication enabled.

Step 2: Setting up the Blockpool


In this step you will set up the blockpool on the blockpool file system you just created in the previous step.

- 1 Choose the StorNext Configuration Wizard's **Storage Destinations** task. The **Configuration > Storage Destinations** screen appears.

There are four tabs on this screen: **Library**, **Storage Disk**, **Replication Targets**, and **Deduplication**. When configuring replication we are concerned with the **Replication Targets** and **Deduplication** tabs. (The deduplication infrastructure is used to handle the transfer of file data for the replication feature, so it must be configured even when the deduplication feature is not used.)

- 2 Click the **Deduplication** tab. The **Configuration > Storage Destinations > Deduplication** Screen appears.

Figure 68 Configuration > Storage Destinations > Deduplication Screen (Blockpool)

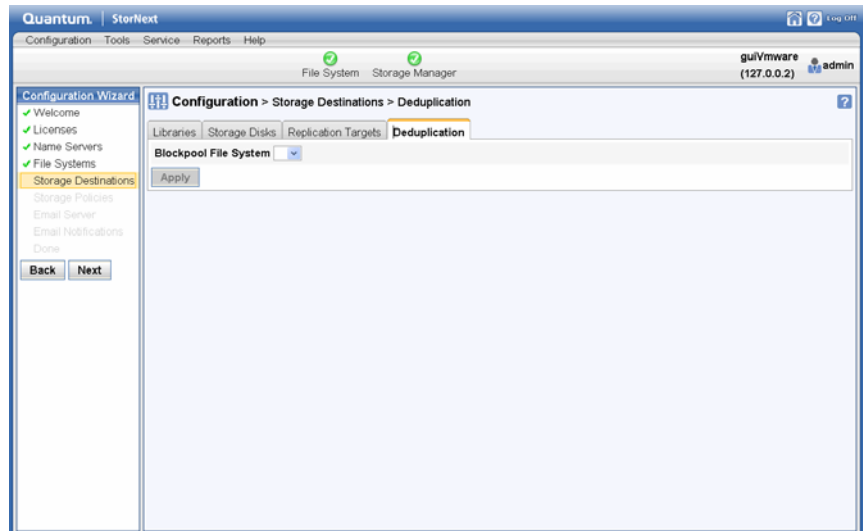

- 3 Click the **Deduplication** tab. This tab has only one field called **Blockpool Host File System**. At this field select from the dropdown list the file system to use for the blockpool. (This is the file system you created in the previous step.)

Note: Once applied, the blockpool location cannot be moved to another file system. Be certain of the blockpool location before you continue.


- 4 After you select the blockpool file system, click **Apply**. A background job is started to create the blockpool. This job typically finishes in a few minutes depending on the size parameter of your deduplication license.

Step 3: Creating Replication Targets

In this step you will specify the actual targets to which you want replicated data sent. (Namespace realization will also occur on these targets.)

- 1 Click the **Replication Targets** tab. The **Configuration > Storage Destinations > Replication Targets** Screen appears.
- 2 Click **Add Host**.

Figure 69 Storage Destinations > Replication Targets Screen

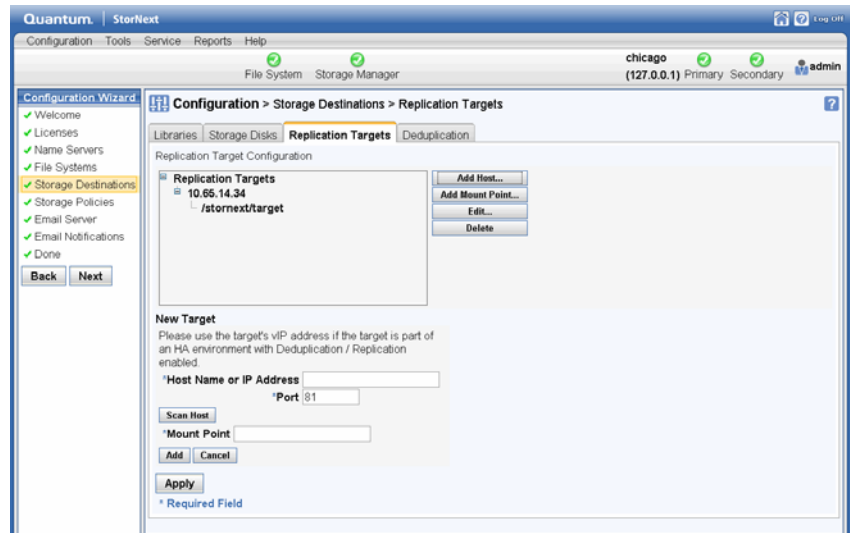

- 3 At the **Hostname or IP** field, enter the host name or its IP address. If the target is an HA cluster, the address should be the vIP for that cluster.
- 4 Click **Scan Host** to populate the **Mount Point** box with appropriate file systems which are configured for replication/deduplication.
- 5 Select the file system you created for use as the target in [Step 1: Create Source and Target File Systems](#), and then click **Add**.

- 6 Click **Apply**. At this point you should see your file system listed as a replication target.

Note: If you were adding additional replication targets, you would repeat steps 3 - 6 to add additional hosts and file systems.

(Optional) Configuring Replication for an HA System

If you are planning to use replication on a high availability (HA) system, this is the point in the configuration process when you should configure HA. If you do not configure HA here, misconfiguration could result and you could be prevented from using replication on your HA system.

If you are using replication on an HA system, proceed to [Optional HA and Multilink Configuration](#) on page 159, and then return to Step 4: Create a Replication Storage Policy.

If you are *not* using replication on an HA system, proceed to Step 4: Create a Replication Storage Policy.

Step 4: Create a Replication Storage Policy


The next step in configuring replication is to create a replication storage policy. This policy contains the replication "rules" specific to your replication source and target file systems. You must create a replication policy for the source directory and enable inbound replication for the target file system.

Creating the Source Directory Replication Policy

- 1 Choose the StorNext Configuration Wizard's **Storage Policies** task. The **Configuration > Storage Policies** Screen appears.

- 2 Click **New**. The **Configuration > Storage Policies > New** Screen appears.

Figure 70 Configuration > Storage Policies > New Screen

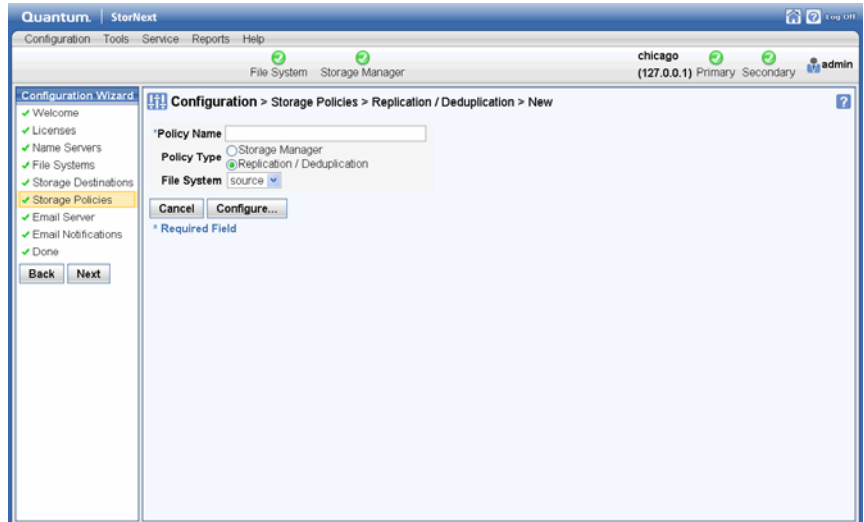

- 3 Enter the following fields:

- **Policy Name:** The name of the new policy you are creating
- **Policy Type:** Choose **Replication/Deduplication** to create a replication storage policy.

Note: The **Replication/Deduplication** button remains disabled (grayed out) until the blockpool directory has been completely created. Creating the blockpool directory is started on the Storage Destinations page's Deduplication tab, and proceeds asynchronously as a background job. This background job can take multiple minutes depending on your licensed deduplication capacity. This button will become enabled once that background job completes.


If there is no deduplication license (for example, if you intend to use replication but not deduplication,) creating the blockpool is still required but the background job will finish within a few seconds.

- **File System:** Choose the source file system from the dropdown list.
- Click **Configure**.

Choose the Source File System

- 1 After you click **Configure**, the screen for configuring a replication/deduplication storage policy appears.
- 2 Click the **Source Directories** tab.

Figure 71 Configuration > Storage Policies > New / Source Directories Screen

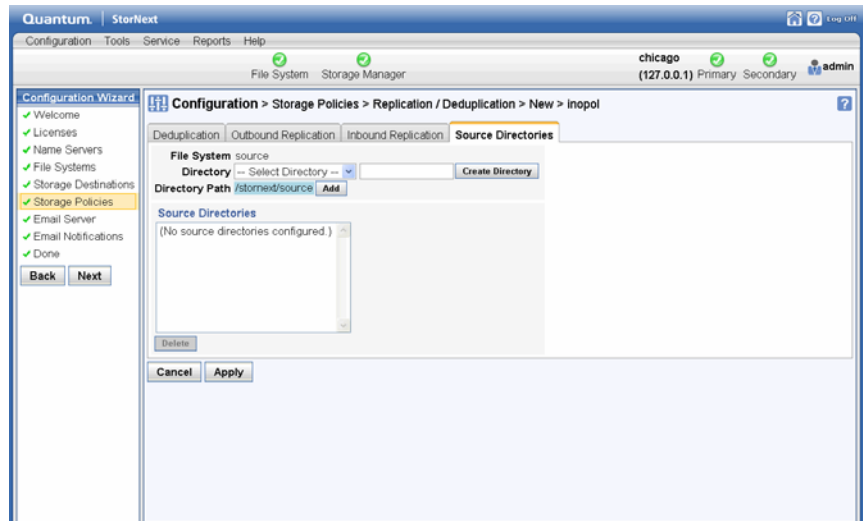


- 3 At the **Directory** field, enter the name of a directory you want to create for the replication source directory.
- 4 Click **Create Directory**, and then click **Add** to add the new directory to the policy.

Enter OutBound Replication Information


- 1 Click the **Outbound Replication** tab.

Figure 72 Storage Policies > New > Outbound Replication Tab

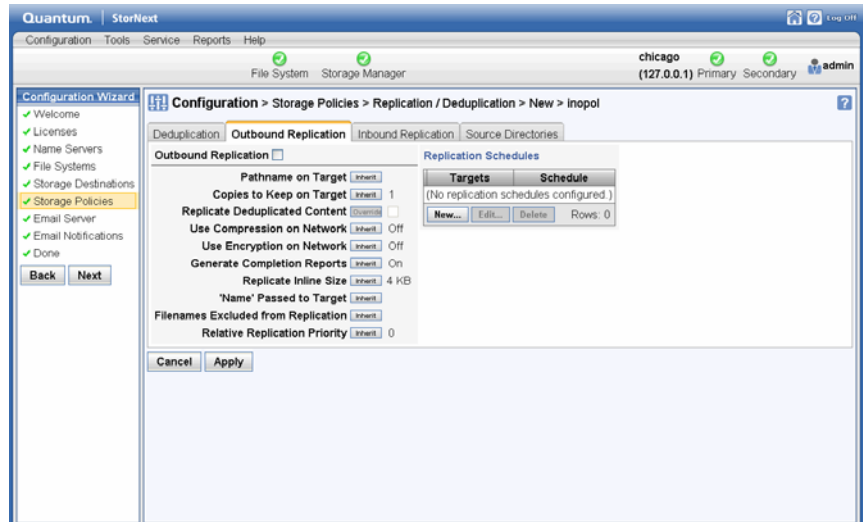

- 2 At the **Outbound Replication** field, enable outbound replication (going out from the source) by clicking the area to the right of the field so that **On** is displayed.
- 3 Click **Inherit** to the right of the **Copies to Keep on Target** field, and then select **1** from the dropdown list.
- 4 (Optional) To create a new replication schedule, in the **Replication Schedules** box, click **New**. Additional fields appear where you can create a replication schedule.

Figure 73 Outbound
Replication Tab > Replication
Schedule

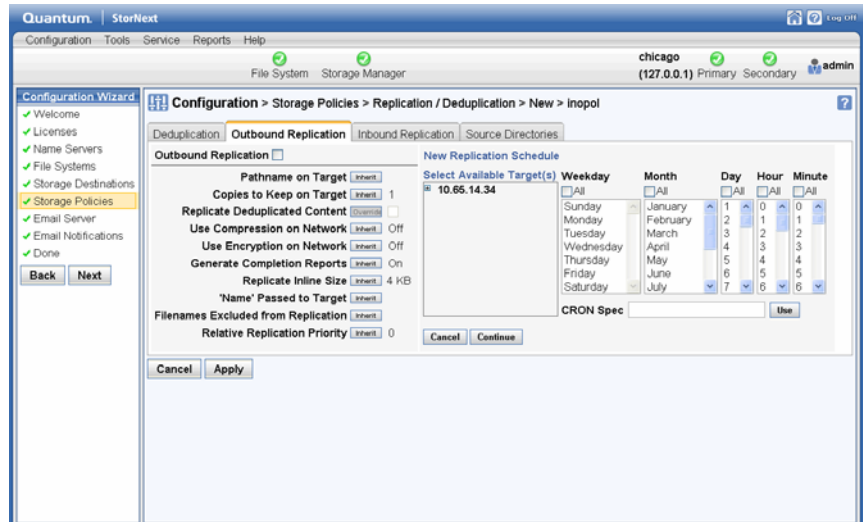


- 5 Under the heading **Select Available Targets**, select the target file system on the target server.
- 6 Create a schedule by making a selection in every column. If you select none of the schedule columns, this creates an unscheduled policy that must be run manually. The schedule shown in [Figure 73](#) will run at midnight every day.
- 7 Click **Continue** to complete the schedule and target selections.
- 8 Click **Apply** to finish creating the policy with the options from all of the tabs.
- 9 After a message informs you that the policy was created successfully, click **OK**.

Enter Inbound Replication Information


- 1 On the **Configuration > Storage Policies** screen, select the replication/deduplication policy named "target" for the replication target file system, and then click **Edit**.

Figure 74 Configuration > Storage Policies Screen (Select "target")

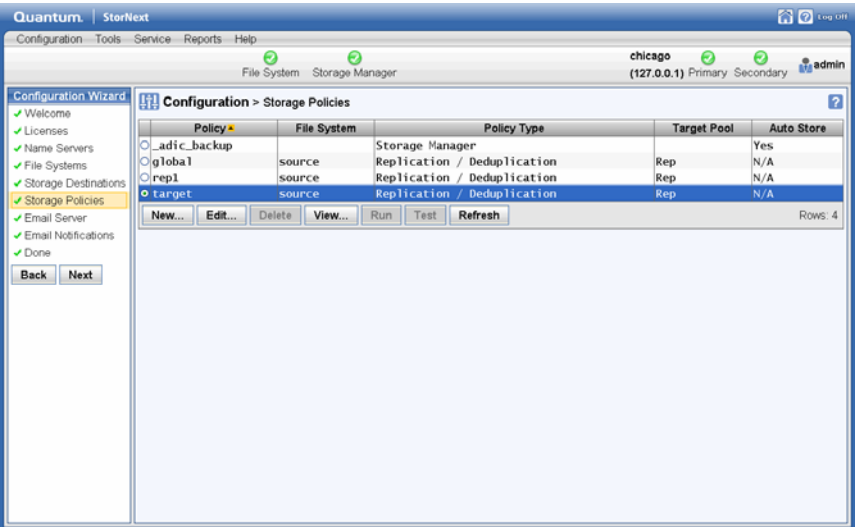

- 2 When the **Configuration > Storage Policies > Edit > target** screen appears, Click the **Inbound Replication** tab.

Figure 75 Storage Policies >
Edit > target > Inbound
Replication Tab

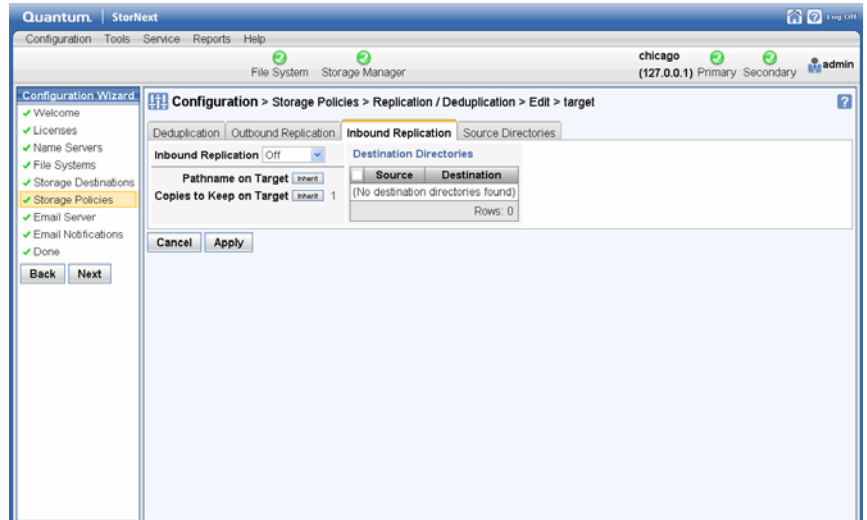

3 At the **Inbound Replication** field, select **On**.

Note: If you do not turn on replication, the process will fail and you will receive an error message saying, “Replication disabled on target.” It is VERY IMPORTANT that you enable replication by setting Inbound Replication to On.

4 Click **Apply** to finish editing the policy with your selected options.

Configuration Steps Summary


The preceding four configuration steps accomplished the following:

- Created a source replication policy and associated a source directory with it
- Selected a target file system on a target host machine and left the target directory unspecified, which uses the directory name of the source
- Set a replication schedule that runs every day at midnight
- Enabled inbound in the target policy
- Enabled outbound replication in the source policy

The contents of the source directory (additions and deletions) will now be replicated to the target directory every night. You can test this by

running the policy manually at any time on the **Configuration > Storage Policies** screen. (Select the policy you want to test and then click **Run**.)

Figure 76 Configuration > Storage Policies (Run Policy)

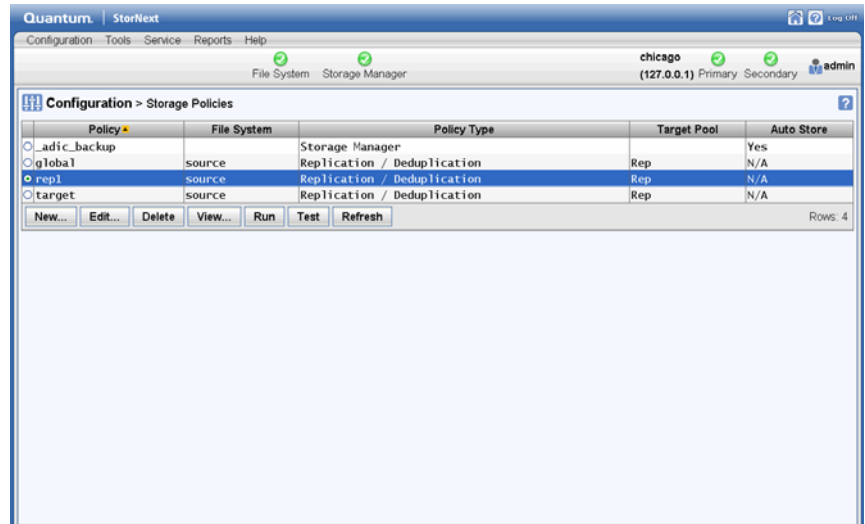

Scheduling Replication Blackouts (Optional)

The Replication Blackout feature provides bandwidth management by allowing you to select of a time period when you do not want replication to run. When a blackout is not in effect, replication data transfer occurs automatically in the background as data changes in the source directories, but the replicated files do not appear in the target directory until the replication policy is run.

You can set a blackout period on the source or target file system (or both) in the file systems' global policy. During the blackout period, both replication data transfer and the realization of file copies on the target are prevented from starting.

A blackout period for a source file system prevents automatic starting new data transfers or scheduled policies. However, manually started policies do run, and perform the necessary data transfers.

A blackout period for a target file system prevents all inbound data transfers from starting, which blocks both manually and automatically started source policies.


However, note the following caveats about blackouts:

- Any replication attempt (whether scheduled or initiated from the command line) which starts during the blackout on the *source* will not be started unless the force option is used. Replications started before the blackout should complete.
- Any replication request which arrives at the *target* during its blackout will be rejected by the target. The source will retry replication until the process succeeds. Replications started before the blackout will complete.

Follow these steps to set up a blackout:

- 1 Choose the StorNext Configuration Wizard's **Storage Policies** task.
- 2 On the **Storage Policies** screen, select the "global" policy for the desired source or target file system, and then click **Edit**. The **Configuration > Storage Policies > Edit** screen appears.
- 3 Click the **Blackout** tab.

Figure 77 Storage Policies > New > Blackout Tab

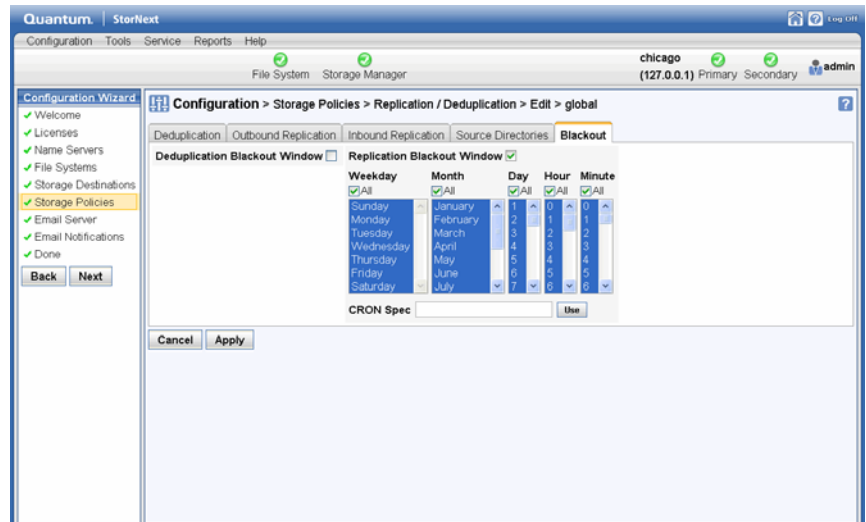

- 4 Click the box to the right of the **Replication Blackout Window** heading to display scheduling fields.

- 5 Specify the weekday(s), month(s), day(s), hour(s) and minute(s) when you would like to block replication from starting automatically.
- 6 Click **Apply** to save the changes in the replication/deduplication storage policy.

Optional HA and Multilink Configuration

When the High Availability (HA) feature is used with replication, a virtual IP (vIP) address must be configured to allow a replication source to use a single IP address to access whichever server is currently performing the Primary function in the target HA cluster.

The vIP is automatically moved to the correct server as part of the failover process for the HaShared file system. (See [Virtual IP \(vIP\)](#) on page 136 for an expanded definition.)


It is easiest to set up the vIP during the initial HA conversion. The vIP configuration items appear automatically at this time if a license exists for replication. It is not necessary to have a replication policy configured.

The IP address used for the vIP must be statically allocated and routable to the physical network interface of both servers in the HA cluster. Please request this IP address and netmask information from your network administrator before starting the HA conversion.

Note: This step describes only the tasks necessary for configuring replication on an HA system. For general instructions about configuring HA, see [Converting to HA](#) on page 213.

- 1 Choose **High Availability > Convert** from the **Tools** menu. The **HA (Convert)** screen appears.

Figure 78 Tools > HA
Convert Screen

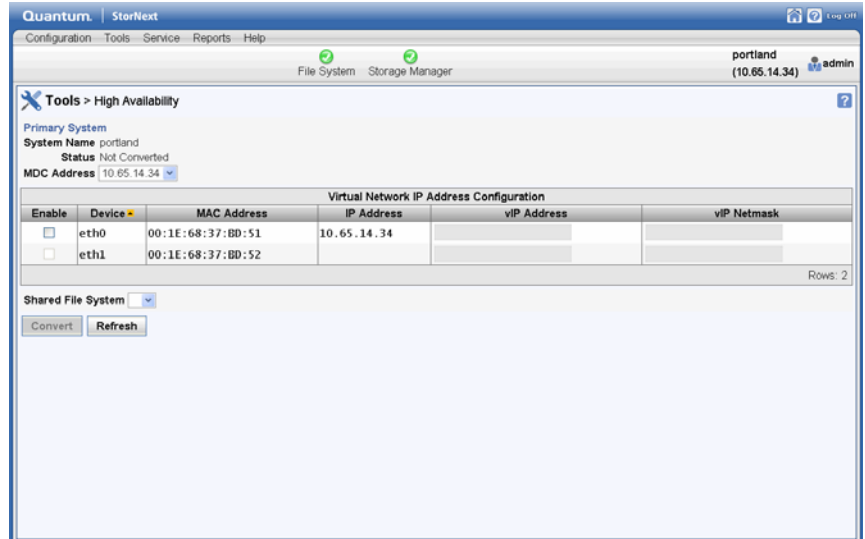

- 2 At the **Shared File System** field, select from the dropdown list the file system that will be dedicated to StorNext HA internal functions.
- 3 At the **MDC Address** field, select from the dropdown list the primary system's IP address for use in communicating between HA MDCs.
- 4 Since this HA system runs a blockpool, you must configure a Virtual IP Address (vIP). Under the heading **Virtual Network IP Address Configuration**, check **Enable** and then enter the vIP (virtual IP) Address and vIP Netmask provided by your network administrator.
- 5 Click **Convert** to convert the primary node to HA.
- 6 When the confirmation message appears, click **Yes** to proceed or **No** to exit without converting.
- 7 When a message informs you that the operation was completed successfully, click **OK**. The configuration items for the Secondary System will be added to the page.

- 8 At the **System Name** field, enter the IP address of the Secondary System to use for communications between HA MDCs, and then click **Scan Host**.
- 9 Select the IP address of the physical interface to associate with the vIP, and then click **Convert**.
- 10 When the confirmation message appears, click **Yes** to proceed or **No** to exit without converting.
- 11 When a message informs you that the conversion was completed successfully, click **OK** to continue.

Setting the IP Address of the Blockpool Server in HA Clusters

The default location of the blockpool server process is localhost. This is not sufficient for HA Clusters where the blockpool server moves with the Primary status to the redundant server in a failover of the HA Shared file system.


- 1 Return to the StorNext Configuration Wizard's **Storage Policies** task.
- 2 Locate the Deduplication/Replication file system, select its global policy, and then click **Edit**. (This step must be repeated for each Deduplication/Replication enabled file system.)
- 3 Click the **Deduplication** tab.
- 4 At the **Address for Replication and Deduplication** field, click the **Inherit** button.
- 5 Replace the localhost value with the vIP address in the **Override** box. (**Override** appears after you click **Inherit**.)
- 6 Click **Apply**.
- 7 When the confirmation message appears, click **Yes** to proceed or **No** to exit. (In this case you can safely ignore the warning about associated directories.)
- 8 When a message informs you that the operation was completed successfully, click **OK** to continue.
- 9 Repeat steps 2 thru 8 for each file system.

Configuring Multilink

Virtual IPs are also used in an HA environment if the multilink feature is configured. A virtual IP address is required for each NIC card you use for replication.

- 1 Choose **Replication/Deduplication > Replication Bandwidth** from the **Tools** menu. The **Tools > Replication > Bandwidth** screen appears.

Figure 79 Tools > Replication > Bandwidth Screen

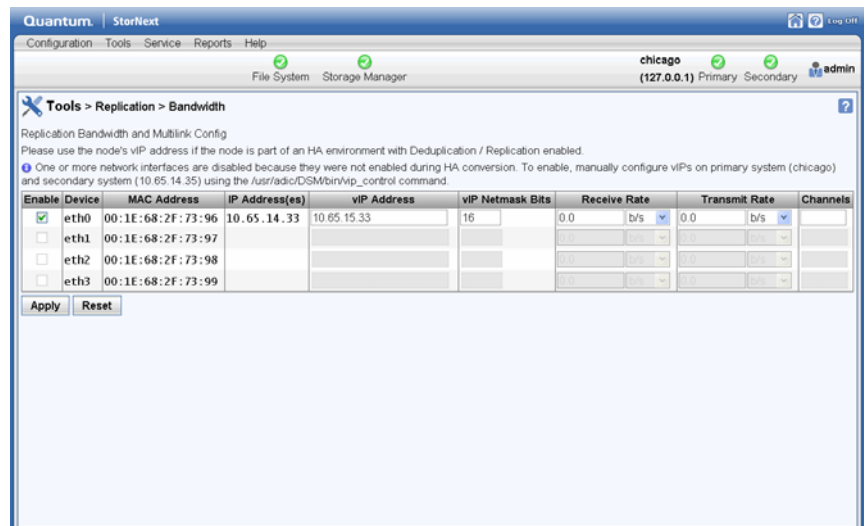

- 2 The **Replication Bandwidth** screen displays a list of NIC cards available for replication. Select **Enable** for each NIC card you want to include in the replication process.
- 3 Enter the following fields:
 - **VIP:** Enter the virtual IP address for the NIC. (Ask your network administrator for this address as well as the virtual netmask.)
 - **VIP Netmask:** Enter the virtual netmask for the NIC
 - **Receive Rate:** Enter the maximum data reception rate (expressed in bits per second) for the replication target. When replication data is received on the target, it will not exceed this speed. (For more information, see [Bandwidth Throttling](#).)

- **Transmit Rate:** Enter the maximum data transmission rate (expressed in bits per second) for the replication source. When replication data is transmitted to the target it will not exceed this speed. (For more information, see [Bandwidth Throttling](#).)
 - **Channels:** Enter the number of channels you want enabled on the NIC.
- 4 Click **Apply** to save your changes.

Running Replication Manually (Optional)

If you did not specify a schedule in the replication source policy, the source directory will be replicated only if you manually run the policy. If you *did* specify a schedule, you can also replicate the source directory at any time by running the policy manually.

Follow these steps to manually run replication for any replication/deduplication policy (whether it was scheduled or not):

- 1 Choose the StorNext Configuration Wizard's **Storage Policies** task. (Alternatively, choose **Storage Policies** from the **Configuration** menu.) The **Configuration > Storage Policies** screen appears. (See [Figure 76](#).)
- 2 Select the policy you want to run, and then click **Run**.
- 3 When a message informs you that the job was successfully initiated, click **OK** to continue.
- 4 To view job progress, select **Jobs** from the **Reports** menu.

Replication Statuses and Reporting

StorNext provides three ways to monitor replication status:

- [Replication Reports](#): View reports showing information pertaining to storage policies and replication targets.
- [Replication Administration](#): View the current replication status.
- [StorNext Jobs](#): View currently running StorNext jobs, including replication.

Replication Reports

There are two reports for replication: **Policy Activity** and **Policy Summary**.

- The **Policy Activity** report shows replication performance statistics.
- The **Policy Summary** report shows replication-related information for each policy.

Both of these reports also show information related to deduplication.

Access these replication reports by choosing **Replication/Deduplication** from the **Reports** menu.


For more information about replication reports, see [Replication Deduplication Reports](#) on page 240.

Replication Administration

The **Administration** option available under the **Tools > Replication/Deduplication** menu allows you to view current replication process, or pause, resume, or stop replication.

After you choose **Administration** from the **Tools > Replication/Deduplication** menu, the **Tools > Replication/Deduplication > Administration** screen appears.

Figure 80 Tools > Replication/Deduplication > Administration Screen

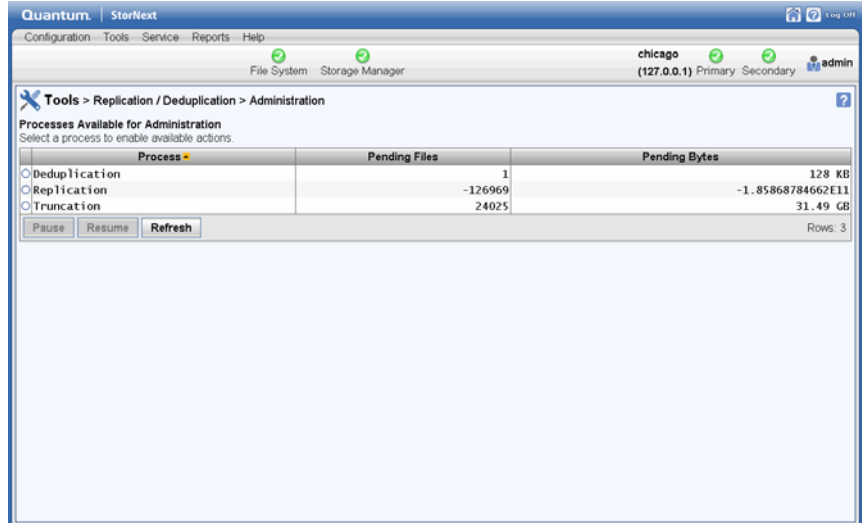

The **Tools > Replication/Deduplication > Administration** screen shows the number of pending files and bytes remaining to replicate (or deduplicate or truncate).

Pausing and Resuming Replication

Near the bottom of the Administration screen are two buttons, **Pause** and **Resume**, which enable you to temporarily pause or resume replication (or deduplication or truncation) respectively. Before you pause or refresh, first select the process you want to pause or refresh: Replication, Deduplication or Truncation.

If you pause or resume replication, clicking the **Refresh** button updates the statuses shown on the Administration screen.

StorNext Jobs

At any time you can view currently running StorNext jobs, including replication. The **Reports > Jobs** screen shows the job ID and type of job, the start and end times, and the current status.

To view jobs, choose **Jobs** from the **Reports** menu. The **Reports > Jobs** report appears.

For more information about StorNext jobs, see [The Jobs Report](#) on page 226.

Troubleshooting Replication

The Troubleshooting appendix in this guide contains simple troubleshooting procedures related to replication. For more information, see [Troubleshooting Replication](#) on page 391.

For issues not covered in that section of the appendix, contact the Quantum Technical Support

Data Deduplication Overview

StorNext *data deduplication* refers to a specific approach to data reduction built on a methodology that systematically substitutes reference pointers for redundant variable-length blocks (or data segments) in a specific dataset. The purpose of data deduplication is to increase the amount of information that can be stored on disk arrays and to increase the effective amount of data that can be transmitted over networks.

For example, if the same 1 terabyte of file data appears in several different files, only one instance of that 1 terabyte needs to be retained. Each of those several files can use the same data bytes from a common storage source when the data is needed.

Quantum's deduplication not only recognizes duplicate data in the entire file, but also recognizes duplicate data ranges within files. For example, if two 1TByte files share the same data from byte 10,000,000 through byte 500,000,000, those duplicate byte ranges can be identified and stored only once. Several files may contain the same data or some of the same data, and these files can all benefit from deduplication.

How Deduplication Works

When a file is initially created in a directory managed by StorNext deduplication, all of the application data is created in that file. Later, the file may be ingested by StorNext. During the ingest process the file will be split (logically) into segments called *blobs*, which is short for “binary large objects.”


Each blob is stored in the machine's blockpool, and has a unique blob tag associated with it. From the list of a file's blob tags, StorNext can reconstitute the file with data from the blockpool.

If several files contain the same blob, only one copy is stored in the blockpool.

If StorNext file truncation is enabled for the deduplication policy, the original file can be “truncated.” (This means that the space for the original file is released and can be re-used.) When part or all of the original file data is needed by an application, the data is retrieved from the blockpool. This concept of file truncation is similar to the file truncation available with StorNext Storage Manager.

The following graphic illustrates how deduplication works.

Figure 81 Deduplication

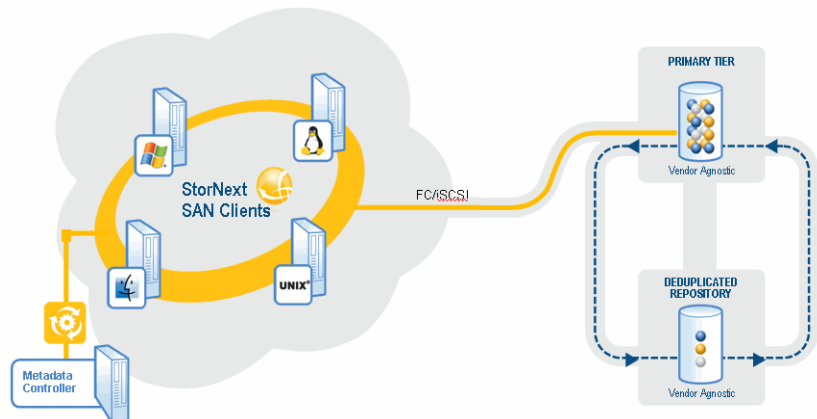

Deduplication and Replication

If StorNext deduplication is enabled in a replication source directory, it is the blobs that get replicated from the source machine to the target machine. This happens continuously during the first stage of replication,

which is data movement. If a blob is shared by more than one file, less data is transferred than when replication occurs without deduplication.

Replicated data moves from the source machine's blockpool to the target machine's blockpool. If the source and target machine are the same, then no data needs to move for replication Stage 1.

When the replication namespace realization occurs in replication Stage 2, the replicated files appear in the target directory as truncated files. The blob tags needed to reconstitute the file are replicated along with other file metadata during Stage 2. When replication is complete, an application can access the replicated file and data will be retrieved from the blockpool as needed.

Setting Up Deduplication

This section describes the steps necessary to configure data deduplication. The easiest way to configure your system for deduplication is to use the StorNext Configuration Wizard, but you can also use the Configuration menu's options to accomplish the same tasks.

Complete these tasks to set up and enable deduplication:

- Step 1: Enable replication/deduplication when you create (or edit) a source file system.
- Step 2: Specify the file system to use for the blockpool (this is done only once per machine.)
- Step 3: Create (or edit) a replication/deduplication storage policy with deduplication enabled on the Deduplication tab.

Step 1: Creating a Deduplication-Enabled File System

Create a file system as you normally would, or edit an existing file system.

- 1 In the Configuration Wizard, choose the **File Systems** task. (Alternatively, choose **File Systems** from the **Configuration** menu.)
- 2 On the **Options** tab, enable replication by selecting **Replication/Deduplication**.

- 3 Continue creating the file system as you normally would. (If you are editing an existing file system, click **Apply** to save your changes.) For more information about creating a file system, see [Step 4: File Systems](#) on page 34.

Step 2: Specifying the Blockpool

To use deduplication you must specify the file system on which the blockpool resides. If you have already enabled replication and a blockpool already exists, you can skip this step.

The process for specifying a blockpool for deduplication is identical to specifying a blockpool for replication. For more information, see [Step 2: Setting up the Blockpool](#) on page 147 in the Configuring Replication section.

Step 3: Creating a Deduplication-Enabled Storage Policy


To enable deduplication you must either create a new replication/deduplication storage policy or edit an existing policy.

- 1 Choose the StorNext Configuration Wizard's **Storage Policies** task. (The **Configuration > Storage Policies** Screen appears.)
- 2 If you are creating a new policy, click **New**. The **Storage Policies > New** Screen appears. (See [Figure 70](#).)

If you are editing an existing replication policy, select the policy you want to edit and then click **Edit**. Skip to Step 5.

- 3 Enter the following fields:
 - **Policy Name:** The name of the new policy you are creating
 - **Policy Type:** choose **Replication /Deduplication** to create a deduplication storage policy.
- 4 Click **Configure**. The **Replication /Deduplication Policy** screen appears.

Figure 82 Replication/
Deduplication Policy Screen

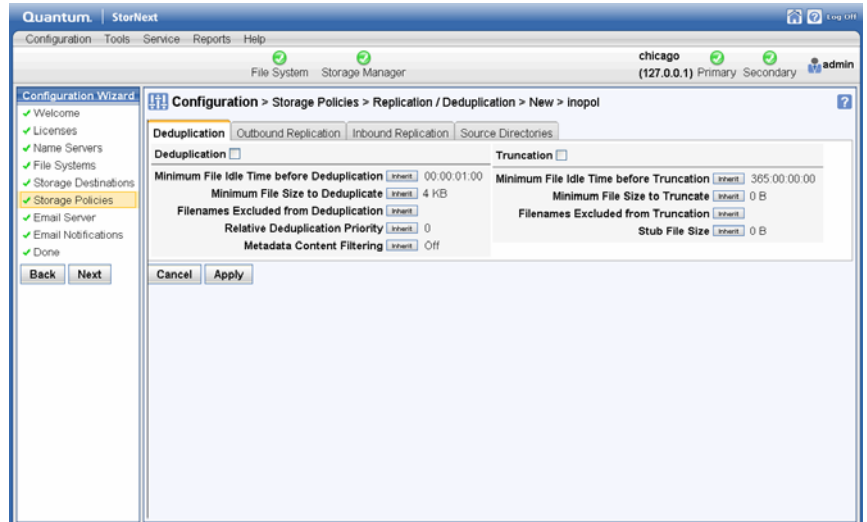

- 5 On the **Deduplication** tab, enable deduplication by clicking the field to the right of the **Deduplication** heading so that it says **On**.
- 6 Accept the displayed default values for other fields, or click the **Inherit** button beside the desired field to enter your own values. (For information about what to enter at each field, see the online help.)

Here are some especially important Deduplication parameters:

- **Minimum File Idle Time before Deduplication:** This parameter determines the interval of time for a file to remain idle before deduplication begins. The default value is 1 minute.
- **Minimum File Size to Deduplicate:** This parameter determines the minimum size a file must be in order to be eligible for deduplication. The default value is 4KB.

Data Deduplication Functions

This section describes the deduplication options on the Setup and Tools menus, which enable you to setup, administer, and manage data deduplication on your StorNext system.

Deduplication Administration

The **Tools > Replication/Deduplication > Administration** screen allows you to view the number of pending files and bytes remaining to be deduplicated (or replicated or truncate). (See [Figure 80](#).)

On this screen you can also pause or resume deduplication. The process for pausing or resuming deduplication is identical to pausing or resuming replications. (For more information, see [Pausing and Resuming Replication](#) on page 165.)

Deduplication Reports

There are two reports for deduplication: **Policy Activity** and **Policy Summary**.

- The **Policy Activity** report shows deduplication performance statistics.
- The **Policy Summary** report shows deduplication-related information for each policy.

Both of these reports also show information related to replication.

Access these deduplication reports by choosing **Replication/Deduplication** from the **Reports** menu.

For more information about deduplication reports, see [Replication Deduplication Reports](#) on page 240.



Chapter 7

Tools Menu Functions

The Tools Menu contains the following options:

- [User Accounts](#): Control user access to StorNext tasks
- [Client Download](#): Download SNFS client software
- [System Control](#): Stop or start the file system or StorNext Storage Monitor, and specify whether to automatically start StorNext at system startup
- [File and Directory Actions](#): Perform file-related and directory-related tasks on managed file systems such as storing and moving files, recovering and retrieving files and directories, and modifying file attributes.
- [File Systems](#)
 - **Label Disks**: Label disk drives
 - **Check File System**: Run a check on your file system (cvfsck) before expanding the file system or migrating a stripe group.
 - **Affinities**: Configure affinities for your file system.
 - **Migrate Data**: Migrate the file system's stripe group(s)
 - **Truncation Parameters**: Manage the file system's truncation parameters

- [Storage Manager](#)
 - **Storage Components:** View current status for libraries, storage disks, and tape drives; place one or more of these components online or offline
 - **Drive Pool:** Add, modify, or delete drive pools
 - **Media Actions:** Remove media from a library or move media from one library to another
 - **Storage Exclusions:** Specify file names to exclude from StorNext Storage Manager
 - **Truncation Exclusions:** Specify file paths to exclude from the truncation process
 - **Tape Consolidation:** Enter parameters for automatically consolidating space on tape media
 - **Library Operator:** Enter or eject media from the Library Operator Interface
 - **Software Requests:** View or cancel pending software requests
 - **Scheduler:** Schedule file system events including Clean Info, Clean Versions, Full Backup, Partial Backup, and Rebuild Policy
 - **Alternate Retrieval Location:** Specify a remote retrieval location to use in situations where files stored on tape or a storage disk.
 - **Distributed Data Mover (DDM):** Spread the distribution of data across several machines rather than the primary server.
- [Replication and Deduplication](#)
 - **Administration:** View current replication process, or pause, resume, or stop replication
 - **Replication Targets:** Add a host or directory for data replication, or edit existing replication targets
 - **Replication Bandwidth:** Configure replication bandwidth limits and multilink
- [HA](#)
 - **Convert:** Convert to a high availability configuration
 - **Manage:** Manage HA system parameters

User Accounts


The Tools Menu's User Accounts option allows you to add new StorNext users and modify permissions for existing users. User Accounts is also where you change the admin's password.

Adding a New User

Follow this procedure to add a new StorNext user.


- 1 Choose **User Accounts** from the **Tools** menu. The **User Accounts** screen appears. All existing users and the admin are shown.

Figure 83 User Accounts Screen

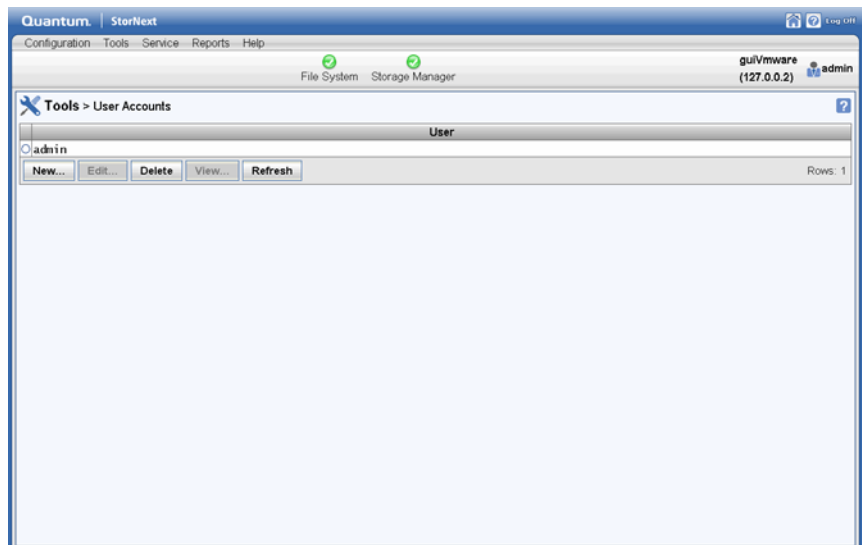

2 Click **New**. The **User Accounts > New** screen appears.

Figure 84 New User Screen

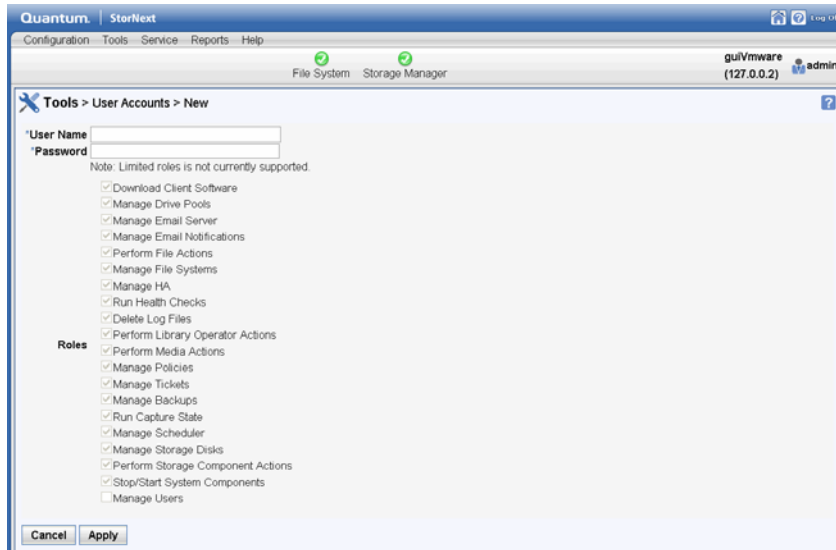

3 In the **User Name** field, type the name the new user will enter at the User ID field when he or she logs on to StorNext.

4 In the **Password** field, type the password the new user will enter when logging on to StorNext.

5 Select all the different roles you want the new user to have:

Download Client Software	Perform Media Actions
Manage Drive Pools	Manage Policies
Manage Email Server	Manage Tickets
Manage Email Notifications	Manage Backups
Perform File Actions	Run Capture State
Manage File Systems	Manage Scheduler
Manage HA	Manage Storage Disks
Run Health Checks	Perform Storage Component Actions
Delete Log Files	Stop/Start System Components

Download Client Software	Perform Media Actions
Manage Drive Pools	Manage Policies
Manage Email Server	Manage Tickets
Manage Email Notifications	Manage Backups
Perform File Actions	Run Capture State
Perform Library Operator Actions	Manage Users


- 6 When you are satisfied with the permissions you have assigned, click **Apply** to save your changes. (To exit without saving, click **Cancel**.)
- 7 When a message informs you that the new user was successfully added, click **OK**.

Viewing an Existing User Profile

Follow this procedure to view an existing user’s profile.

- 1 From the **User Accounts** screen, select the user whose information you want to view, and then click **View**. A screen shows the parameters for the selected user.

Figure 85 Edit User Screen

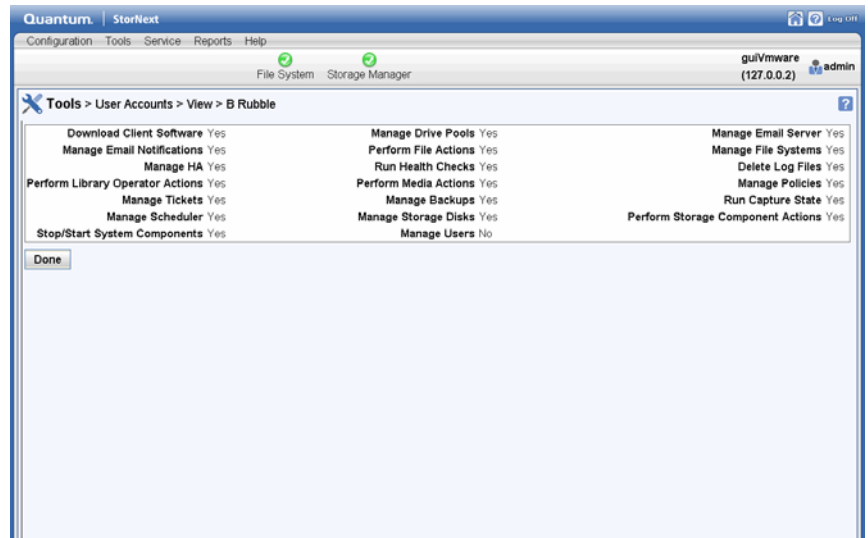


- 2 When you are finished viewing user profile information, click **Back** to return to the User Accounts screen.

Modifying an Existing User

Follow this procedure to modify an existing user's permission.

- 1 From the **User Accounts** screen, select the user whose information you want to modify, and then click **Edit**. A screen similar to the one where you added the user appears.

Figure 86 Edit User Screen

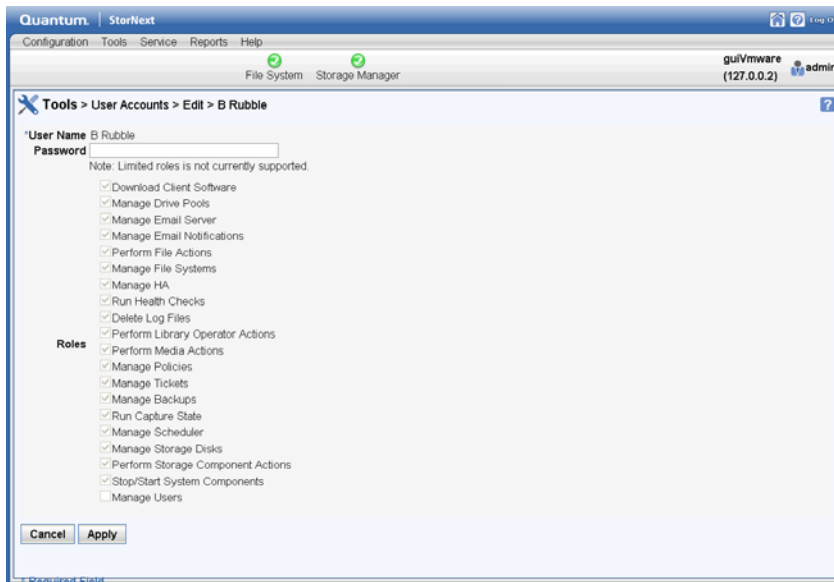

- 2 As necessary, change the user's password and modify permissions by selecting or deselecting roles.
- 3 When you are satisfied with the changes you have made, click **Apply** to save your changes. (To exit without saving, click **Cancel**.)
- 4 When a message informs you that the new user was successfully modified, click **OK**.

Deleting an Existing User

Follow this procedure to delete an existing StorNext user.

- 1 From the **User Accounts** screen, select the user you want to delete, and then click **Delete**. (See [Figure 83](#).)
- 2 When the confirmation message appears, click **Yes** to proceed, or **No** to return to the **User Accounts > [admin name]** screen without saving.

Note: NOTE: You cannot delete the admin. You can only change the admin's password as described below.


- 3 When a message informs you that the new user was successfully deleted, click **OK**.

Changing the Admin Password

Follow this procedure to modify an existing user's permission.

- 1 If you have not already done so, choose **User Accounts** from the **Tools** menu. The **User Accounts** screen appears. (See [Figure 83](#).) All existing users and the admin are shown.
- 2 Select the admin, and then click **Edit**. The **User Accounts > [admin name]** screen appears.

Figure 87 Edit Admin Screen

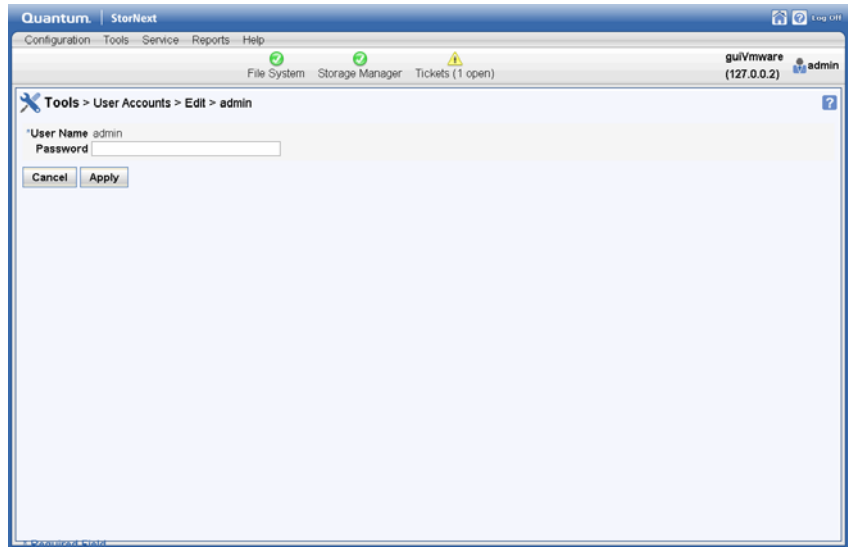

- 3 In the **Password** field, type the new password for the admin.
- 4 When the confirmation message appears, click **Yes** to proceed, or **No** to return to the Configuration > [admin name] screen without saving.
- 5 When a message informs you that the admin's password was successfully modified, click **OK**.

Client Download

The StorNext client software lets you mount and work with StorNext file systems.

To ensure successful operation, before you install the client software verify that the client system meets all operating system and hardware requirements listed below.


To install the StorNext client software, first download the client software from the metadata controller (MDC) as described in Downloading Client Software.

After downloading the client software, install and configure it using the appropriate method for your operating system. For more information about installing and configuring client software, see the instructions in the StorNext Installation Guide.

To download client software:

- 1 Choose **Client Download** from the **Tools** menu. The **Tools > Client Download** screen appears.

Figure 88 Client Download Screen

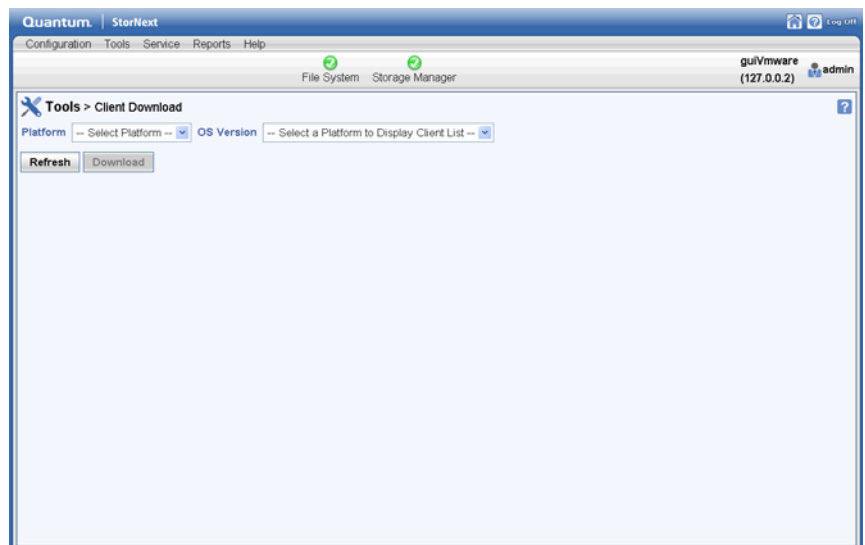

- 2 Select from the **Platform** list the desired operating system.
- 3 Select from the **OS Version** list the desired operating system version corresponding to the platform you selected.
- 4 When a window appears containing a link to the client software download location, click the link to begin downloading.

Figure 89 Client Download Link




- 5 Click **Download** to begin the process.
- 6 When prompted, choose the **Save to Disk** option, and then click **OK**.
- 7 Browse to the location where you want to save the file, and then click **Save**.
- 8 After the client package has been saved, click **Done**.
- 9 Continue with the installation procedure for your operating system as described in the *StorNext Installation Guide* or the online help.

System Control

The System Control screen enables you to tell at a glance whether StorNext File System and StorNext Storage Manager are currently started. In the case of Storage Manager, you can also see which individual components are currently started or stopped. From this screen you can start or stop File System and Storage Manager, and also specify whether you want StorNext to start automatically whenever your system is rebooted.

To access the **System Control** screen, choose **System Control** from the **Tools** menu. The **Tools > System Control** screen appears.

Figure 90 System Control Screen

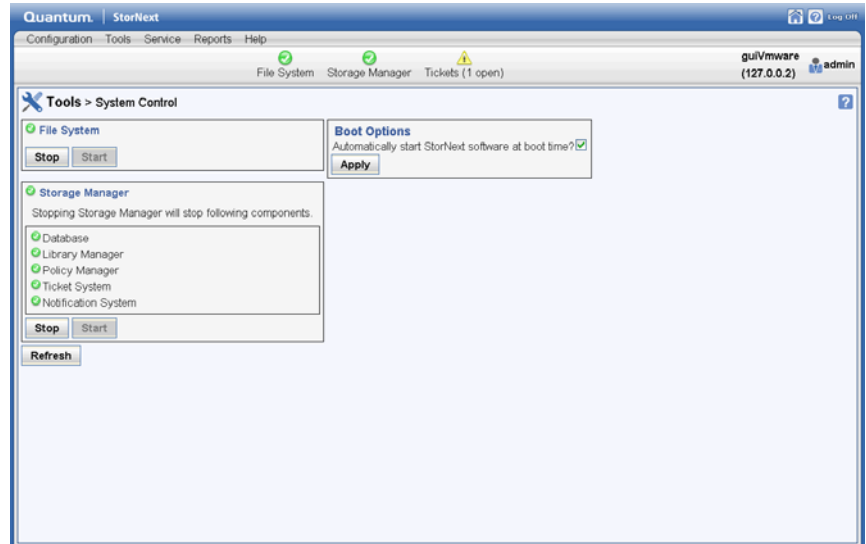

Starting or Stopping StorNext File System

Most StorNext operations require that the StorNext File System be started, although there may be times when you need to stop the File System.

Click **Start** to start the File System, or **Stop** to stop the File System.

Starting or Stopping StorNext Storage Manager

StorNext Storage Manager includes the following components:

- Database
- Library Manager
- Policy Manager
- Ticket System
- Notification System

There are conditions which could cause one or more component to stop. If this happens, starting the Storage Manager restarts these stopped components.

Click **Start** to start the Storage Manager, or **Stop** to stop the Storage Manager.

Refreshing System Status

When there is a change in system status, sometimes there is a delay in updating the status. Click **Refresh** to immediately update the GUI system status.

Specifying Boot Options

If you would like StorNext to automatically start File System and Storage Manager whenever your system starts, select the option **Automatically start StorNext software at boot time?** and then click **Apply**.

File and Directory Actions

The Tools menu's **File and Directory Actions** option enables you to perform various actions on the files and directories in your library.

To access the **Tools > File and Directory Actions** screen, choose **File and Directory Actions** from the **Tools** menu. The following information is displayed for the available files:

- **Name:** The name of the file
- **Owner:** The file owner
- **Group:** The group to which the file belongs
- **Size:** The size (in bytes) of the file
- **Last Modified:** The date and time when the file was last modified

At the top of the screen is a dropdown list of Available Actions you can perform for files. Select the file for which you want to perform the action, and then choose one of these options from the Available Actions list:

- [Store Files](#)
- [Change File Version](#)
- [Recover Files](#)
- [Recover Directories](#)
- [Retrieve Files](#)
- [Retrieve Directory](#)


- [Truncate Files](#)
- [Move Files](#)
- [Modify File Attributes](#)
- [View File Information](#)

Store Files

Choose this option to store files by policy or custom parameters.

- 1 Choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears.

Figure 91 File and Directory Action Screen

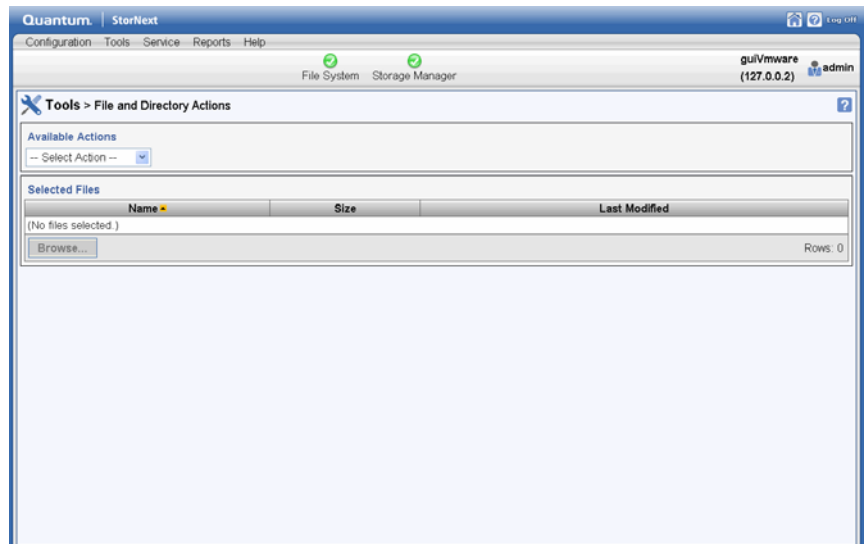

- 2 Select the file you want to store. If necessary, click **Browse** and then click **All Managed Directories** to view a list of the managed directories. Select the directory containing the files to be stored. Mark the files of interest and then click **Continue** to select them.
- 3 To store the selected file according to policy, at the **Store Parameters** field, select **By Policy**.
 - a Click **Apply**.
 - b When the confirmation message appears, click **Yes** to store the file, or **No** to abort.

- 4 To store the selected file according to custom parameters, at the **Store Parameters** field, select **Custom**.
 - a Enter the following fields:
 - **Number of Copies:** Indicate the number of copies to store
 - **Truncate Files Immediately:** Select this option to truncate files immediately before storing
 - **Tape Drive Pool:** Select the tape drive pool for the selected file
 - **Minimum File Size:** Specify the minimum file size
 - **Media Type:** Specify the tape drive media type
 - b Click **Apply**.


When the confirmation message appears, click **Yes** to mount the store the file, or **No** to abort.

Change File Version

Choose this option to change the file version to a new version.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91](#).)
- 2 Choose **Change File Version** from the **Available Actions** dropdown menu.

Figure 92 Change File Version
Screen

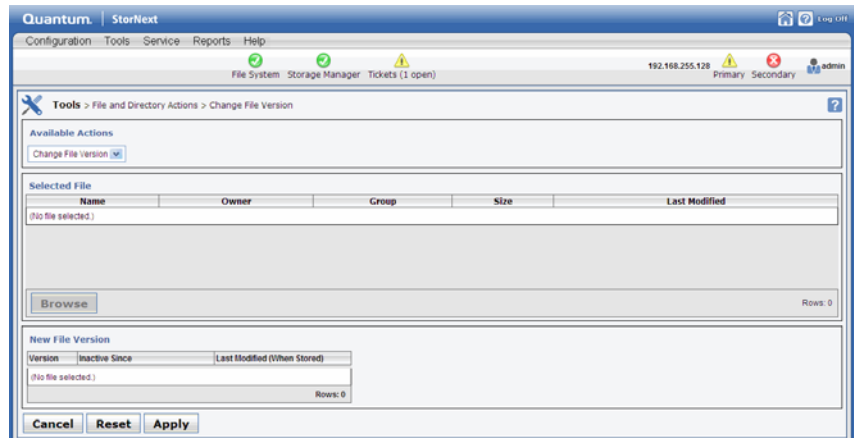

- 3 Select the file whose version want to change. If necessary, click **Browse** to navigate to the file location and then select the file.
- 4 At the **New File Version** field, select the new version to which you want to change for the selected file.
- 5 Click **Apply**.
- 6 When the confirmation message appears, click **Yes** to dismount the media, or **No** to abort.
- 7 Repeat steps 2 - 6 to change versions for additional files.


Recover Files

Choose this option to recover previously deleted files.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91](#).)
- 2 Choose **Recover Files** from the **Available Actions** dropdown menu.
- 3 Click **Browse**. The **Tools > File and Directory Actions > Recover Files > Browse** screen appears.


The **Browse** screen shows a list of managed directories which contain files eligible for recovering.

Figure 93 Recover Files Browse
Screen

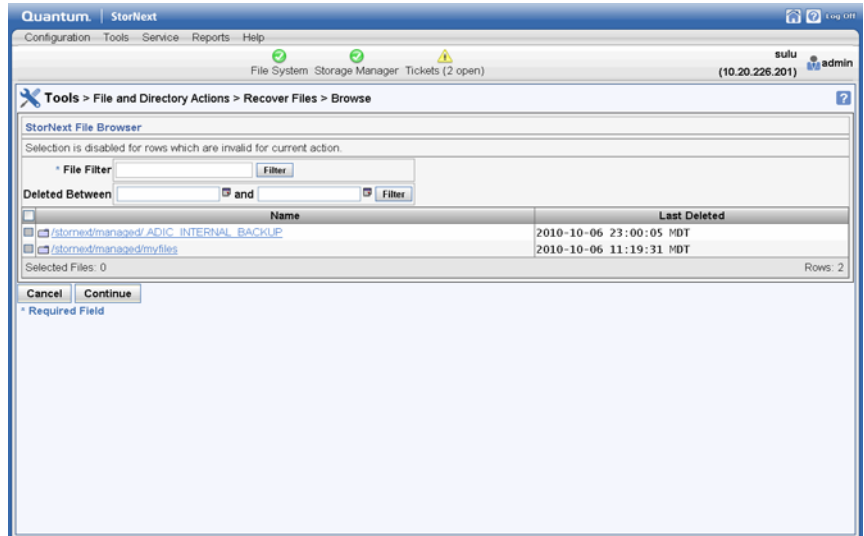

- 4 To select files to recover, click the name of the desired directory.
- 5 When that directory's files are displayed, select the file(s) you want to recover by clicking the square checkbox to the left of the file's name. You can also select all files by clicking the checkbox next to the **Name** heading.
- 6 If desired, you can use one or both filters to restrict the number of files displayed:
 - **File Filter:** This filter enables you to restrict the search to files whose names contain any part of the string you enter at this field. For example, if you enter **p**, only files which include the letter "p" in their file names are shown.
To use the File Filter, enter a letter or string in the **File Filter** field, and then click **Filter**.
 - **Deleted Between:** When you enter a beginning and ending date range, only files which were deleted between those dates (inclusive) are included in search results.
To use the Deleted Between filter:
 - a Position the cursor in the first field, and then click the calendar icon.

Figure 94 Recover Directories
Browse Screen

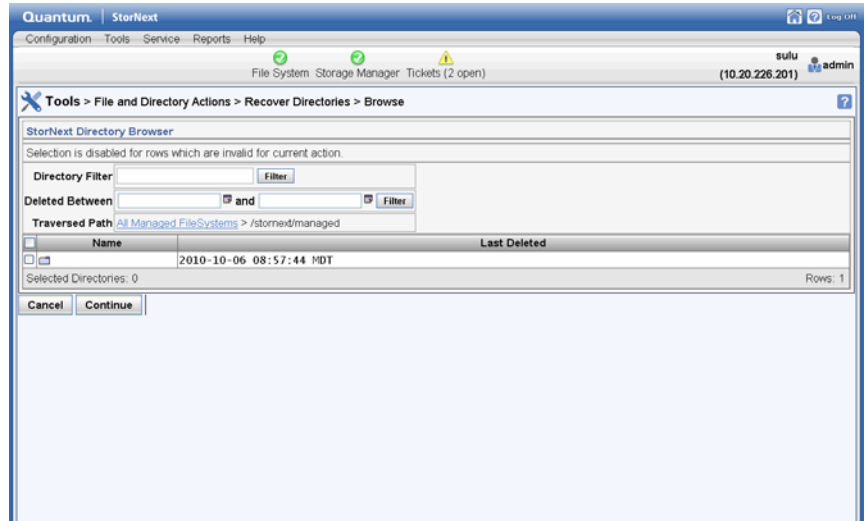

- 4 To select directories to recover, click the square checkbox to the left of the directory's name. You can also select all directories by clicking the checkbox next to the **Name** heading.
- 5 If desired, you can use one or both filters to restrict the number of files displayed:
 - **Directory Filter:** This filter enables you to restrict the search to directories whose names contain any part of the string you enter at this field. For example, if you enter **p**, only directories which include the letter "p" in their directory names are shown.
To use the Directory Filter, enter a letter or string in the **Directory Filter** field, and then click **Filter**.
 - **Deleted Between:** When you enter a beginning and ending date range, only directories which were deleted between those dates (inclusive) are included in search results.
To use the Deleted Between filter:
 - a Position the cursor in the first field, and then click the calendar icon.
 - b Select the desired date and time, and then click the blue X icon to close the calendar.
 - c Repeat steps a and b at the second date field.

- d Click the **Filter** button to the right of the **Deleted Between** field to apply the filtering criteria you entered.
- 6 When you are ready to recover the selected directories, click **Continue**. You are returned to the **Tools > File and Directory Actions** screen, and the selected directories are shown.
- 7 If desired, enter one or both of the **Advanced Options**:
 - **Destination Directory**: Specify an alternative path name for the directory to which you want to save the recovered directory.
 - **Files Active At**: Click the calendar icon and specify a date and time to include only the files inside the recovered directory which were active (not deleted) on or before the specified date. Click the blue X icon to close the calendar.

The 'Destination Directory' and 'Files Active At' options are valid only when recovering a past instance of a directory. (The normal functionality of a recover operation is to recover files or directories that have been removed.) When recovering an instance of a directory, the directory may still exist (along with its contents,) but what is desired is a 'snapshot' of which files were active in the directory at a point in time.

Consequently, when recovering a directory instance you must use the 'Destination Directory' option to specify a new destination because the source directory may already exist and you do not want to recover over that directory.

Note: After recovering an instance you end up with an entirely new managed directory with no relation to the source.

Also when recovering an instance of a directory, the time of the snapshot is needed. The 'Files Active At' option allows you to specify a specific time for the snapshot.


- 8 Click **Apply** to start a job to recover the selected directories, or click **Cancel** to abort the recovery process.
- 9 If you clicked **Apply**, a message informs you that the recovery job has started. Click **OK** to continue.
- 10 Choose **Reports > Jobs** to view the results of the directory recovery operation.

Retrieve Files

Choose this option to retrieve files.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91](#).)
- 2 Choose **Retrieve Files** from the **Available Actions** dropdown menu.

Figure 95 Retrieve Files Screen

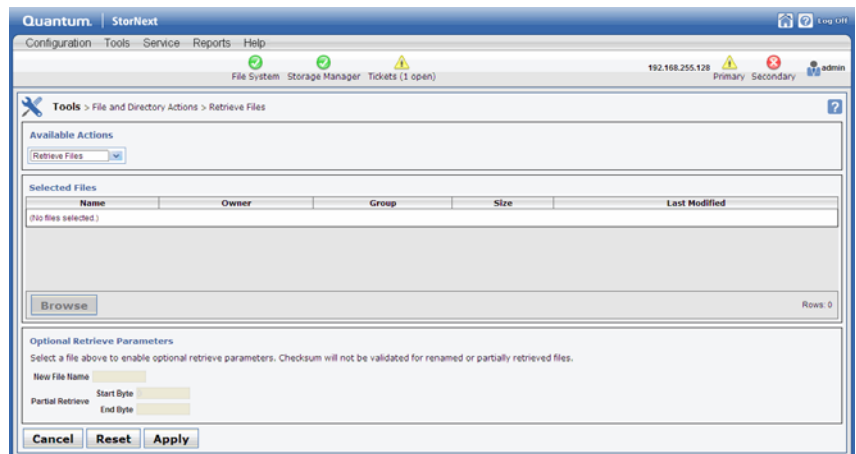

- 3 Select the file you want to retrieve. If necessary, click **Browse** to navigate to the file location and then select the file.
- 4 If desired, enter the following **Optional Retrieve Parameters** for the selected file.
 - **New File Name:** Enter a new name to assign to the selected file upon retrieval
 - **Partial Retrieve Start Byte and End Byte:** To do a partial file retrieval, enter the file's starting and ending bytes.

When you enter these optional retrieve parameters, checksum is not validated for the selected file.


- 5 Click **Apply**.
- 6 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 7 Repeat steps 2 - 6 to retrieve additional files.

Retrieve Directory

Choose this option to retrieve directories.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91.](#))
- 2 Choose **Retrieve Directory** from the **Available Actions** dropdown menu.

Figure 96 Retrieve Directory Screen

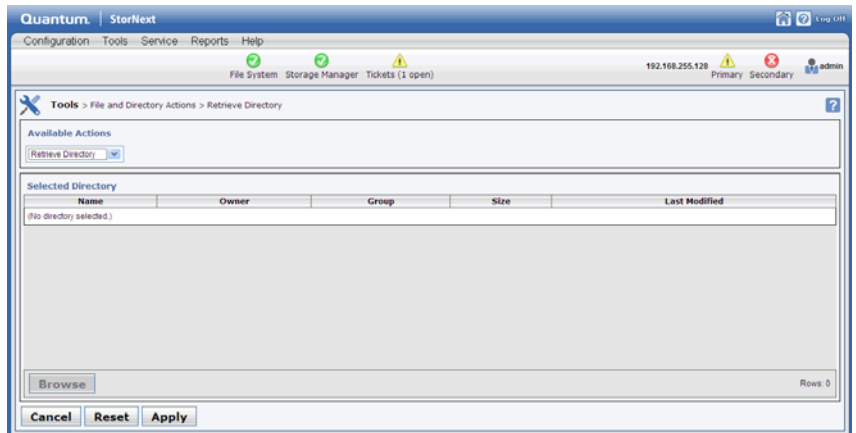

- 3 Select the directory you want to retrieve. If necessary, click **Browse** to navigate to the directory location and then select the directory.
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 6 Repeat steps 2 - 5 to retrieve additional directories.


Truncate Files

Choose this option to truncate files.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91.](#))

- 2 Choose **Truncate Files** from the **Available Actions** dropdown menu.

Figure 97 Truncate Files Screen

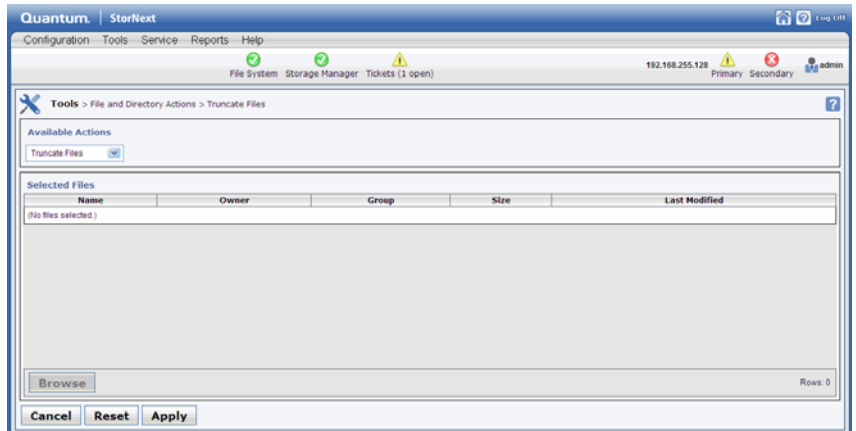

- 3 Select the file you want to truncate. If necessary, click **Browse** to navigate to the file location and then select the file.
- 4 Click **Apply**.
- 5 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 6 Repeat steps 2 - 5 to truncate additional files.


Move Files

Choose this option to move files.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91](#).)

2 Choose **Move Files** from the **Available Actions** dropdown menu.

Figure 98 Move Files Screen

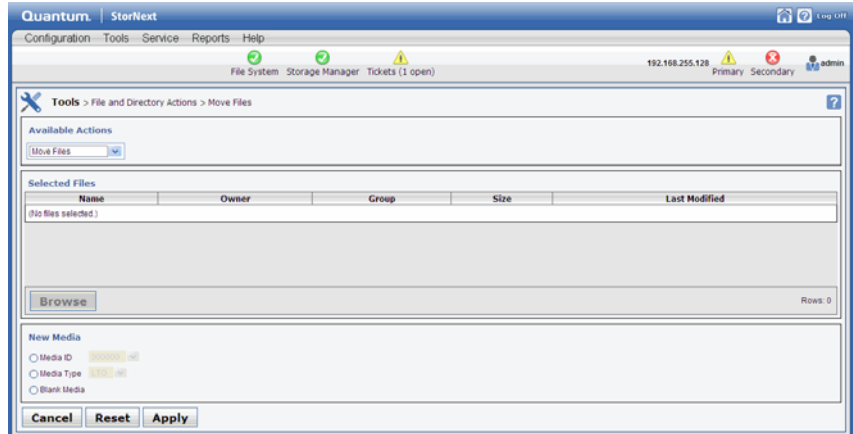

- 3 Select the file you want to move. If necessary, click **Browse** to navigate to the file location and then select the file.
- 4 At the **New Media** field, select one of these options for the file:
 - **Media ID:** Specify the unique identifier for the media to which you are moving the selected file
 - **Media Type:** Specify the media type for the media to which you are moving the selected file
 - **Blank Media:** Select this option if you are moving the selected file to blank media
- 5 Click **Apply**.
- 6 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 7 Repeat steps 2 - 6 to move additional files.


Modify File Attributes

Choose this option to modify attributes for the selected file.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91](#).)

- 2 Choose **Modify File Attributes** from the **Available Actions** dropdown menu.

Figure 99 Modify File Attributes Screen

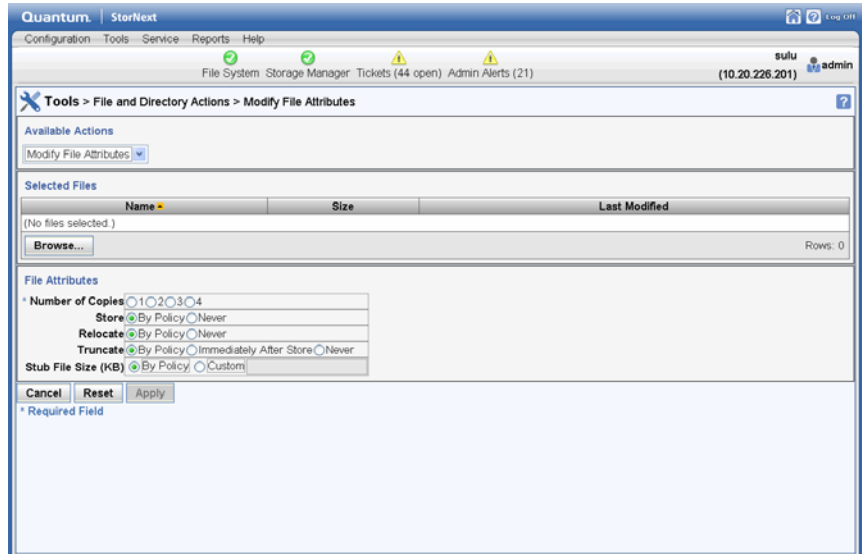


- 3 Select the file whose attributes you want to change. If necessary, click **Browse** to navigate to the file location and then select the file.
- 4 At the **File Attributes** field, enter these options. Required fields are marked with an asterisk. (For information about what to enter at each field, see the online help.)
 - **Number of Copies**
 - **Store**
 - **Relocate**
 - **Truncate**
 - **Stub File Size**
- 5 Click **Apply**.
- 6 When the confirmation message appears, click **Yes** to proceed, or **No** to abort.
- 7 Repeat steps 2 - 6 to apply attributes to additional files.

View File Information

Choose this option to view detailed information about the selected file.

- 1 If you have not already done so, choose **File and Directory Actions** from the **Tools** menu. The **Tools > File and Directory Actions** screen appears. (See [Figure 91](#).)
- 2 Choose **View File Info** from the **Available Actions** dropdown menu.

Figure 100 View File Info Screen

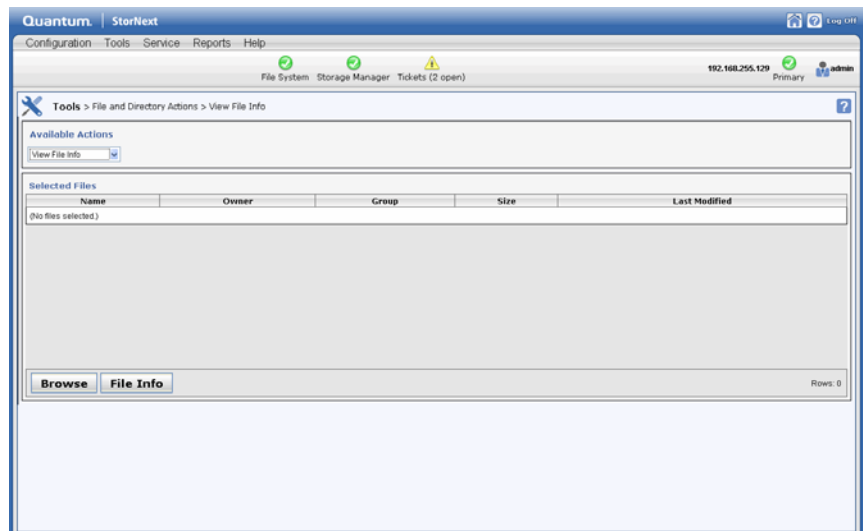

- 3 Select the files whose attributes you want to view. If necessary, click **Browse** to navigate to the file location and then select the file.
- 4 Click **File Info** to view information.
- 5 Click **Done** when you are finished viewing file information.

File Systems

The **Tools > File Systems** menu contains options that enable you to perform the following file system-related tasks:

- **Label Disks:** Apply EFI or VTOC label names for disk devices in your StorNext libraries
- **Check File System:** Run a check on StorNext files systems prior to expanding or migrating the file system
- **Affinities:** Allocate additional storage to a file system by creating a new stripe group in the file system configuration file, and assigning new disks to the stripe group
- **Migrate File System:** Move data files from a source file system to a destination stripe group, freeing stripe groups so they can be removed from an existing StorNext file system
- **Truncation Parameters:** Enter truncation parameters for your file systems in order to free up file storage that isn't being actively used

These tasks are described in [Chapter 4, File System Tasks](#)

Storage Manager

The **Tools > Storage Manager** menu contains options that enable you to perform the following Storage Manager-related tasks:

- **Storage Components:** View your system's libraries, storage disks, and tape drives, and place those devices online or offline
- **Drive Pool:** View, add, edit, or delete drive pools (groups of tape drives allocated for various administrator-defined storage tasks)
- **Media Actions:** Perform various actions on the storage media in your library
- **Storage Exclusions:** Specify file names to exclude from StorNext Storage Manager

- **Truncation Exclusions:** Specify file paths to exclude from the truncation process
- **Tape Consolidation:** Enter parameters for automatically consolidating space on tape media
- **Library Operator Interface:** The StorNext Library Operator Interface allows you to perform media-related actions remotely from the library
- **Software Requests:** View current software requests in progress or cancel a request
- **Scheduler:** Schedule tasks to run automatically based on a specified schedule
- **Alternate Retrieval Location:** Specify a remote retrieval location to use in situations where files stored on tape or a storage disk.
- **Distributed Data Mover:** Spread the distribution of data across several machines rather than the primary server.

These tasks are described in [Chapter 5, Storage Manager Tasks](#)

Replication and Deduplication

The **Tools > Replication/Deduplication** menu options enable you to perform the following tasks related to replication:

- **Administration:** View current progress for replication, data deduplication, and truncation operations. Also pause or resume replication, deduplication and truncation.
- **Replication Targets:** Add replication hosts and mount points to your replication targets, and edit properties for existing hosts and mount points. Also delete unwanted replication targets.
- **Replication Bandwidth:** Configure multilinks and bandwidth limits for replication.

Replication and deduplication tasks are described in [Chapter 6, Replication and Deduplication](#)

HA

The **Tools > HA** menu options enable you to perform the following HA-related tasks:

- **Convert:** Convert a shared file system to high availability configuration
- **Manage:** View the current status of the file systems on your HA system and perform various HA-related functions such as starting or stopping nodes on the HA cluster

These tasks are described in [Chapter 9, Converting to HA](#)



Chapter 8

Service Menu Functions

The StorNext **Service Menu** contains the following options:

- **Health Check:** Perform one or more health checks on StorNext and view recent health check results
- **Capture State:** Obtain and preserve detailed information about the current StorNext system state
- **System Backup:** Run a backup of StorNext software
- **Admin Alerts:** View informational messages about system activities
- **Tickets:** View, edit, or close service tickets generated for the system

The Health Check Function

The Health Check feature enables you to run various diagnostic checks on your StorNext system. This screen shows the available tests, as well as the start time, finish time, and status for the last time each test ran.

Here are the diagnostic tests available:

- **Archive:** Verify that all configured archives are online


- **Config:** Verify that affinities are configured correctly in SNSM for managed file systems, and that SNSM-managed file systems are identified and configured correctly
- **Database:** Verify database integrity.
- **Disk Space:** Verify that enough disk space exists for the SNSM database tables, logging, and other functions
- **Drive:** Verify that all configured drives are online
- **Media:** Verify that there are enough media available for all policies to store all file copies, and that SNSM media are configured correctly
- **Policies:** Verify that SNSM is keeping up with file system events and store candidate processing

Running a Health Check

Use this procedure to run a health check.

- 6 Choose **Health Check** from the **Service** menu. The **Service > Health Check** screen appears.

Figure 101 Health Check Screen

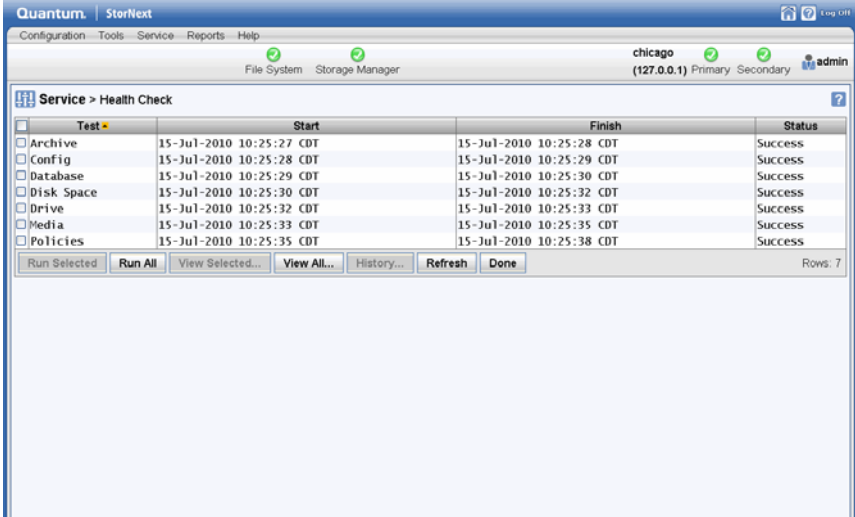

The screenshot shows the Quantum StorNext interface with the 'Service > Health Check' screen. The interface includes a navigation bar with 'Configuration', 'Tools', 'Service', 'Reports', and 'Help'. Below the navigation bar, there are status indicators for 'File System' and 'Storage Manager', both showing green checkmarks. The user is logged in as 'admin' on a system named 'chicago (127.0.0.1)'. The main content area displays a table with the following data:

Test	Start	Finish	Status
<input type="checkbox"/> Archive	15-Jul-2010 10:25:27 CDT	15-Jul-2010 10:25:28 CDT	Success
<input type="checkbox"/> Config	15-Jul-2010 10:25:28 CDT	15-Jul-2010 10:25:29 CDT	Success
<input type="checkbox"/> Database	15-Jul-2010 10:25:29 CDT	15-Jul-2010 10:25:30 CDT	Success
<input type="checkbox"/> Disk Space	15-Jul-2010 10:25:30 CDT	15-Jul-2010 10:25:32 CDT	Success
<input type="checkbox"/> Drive	15-Jul-2010 10:25:32 CDT	15-Jul-2010 10:25:33 CDT	Success
<input type="checkbox"/> Media	15-Jul-2010 10:25:33 CDT	15-Jul-2010 10:25:35 CDT	Success
<input type="checkbox"/> Policies	15-Jul-2010 10:25:35 CDT	15-Jul-2010 10:25:38 CDT	Success

At the bottom of the table, there are buttons for 'Run Selected', 'Run All', 'View Selected...', 'View All...', 'History...', 'Refresh', and 'Done'. The text 'Rows: 7' is visible in the bottom right corner of the table area.

- 7 Select one or more tests to run by clicking the desired check. (There is no need to hold down the **Control** key while clicking.) To deselect a test, click it again.
- 8 Click **Run Selected** to run the tests you selected. Or, to run all tests, click **Run All**.


Viewing the Health Check Results

After a test has been run successfully (as indicated by “Success” in the Status column), you can view test results.

- 1 To view results for one or more tests, select the desired tests and then click **View Selected**.
- 2 To view results for all successfully completed tests, click **View All**.
- 3 When you are finished viewing, click **Done**.

Regardless of which View option you choose, test results are shown for the last successful tests completed regardless of the date on which they ran. For example, if you select two tests and then click **View Selected**, there might be an interval as long as a week or more between the finish dates for the two tests.

Figure 102 Health Check > View Selected Screen

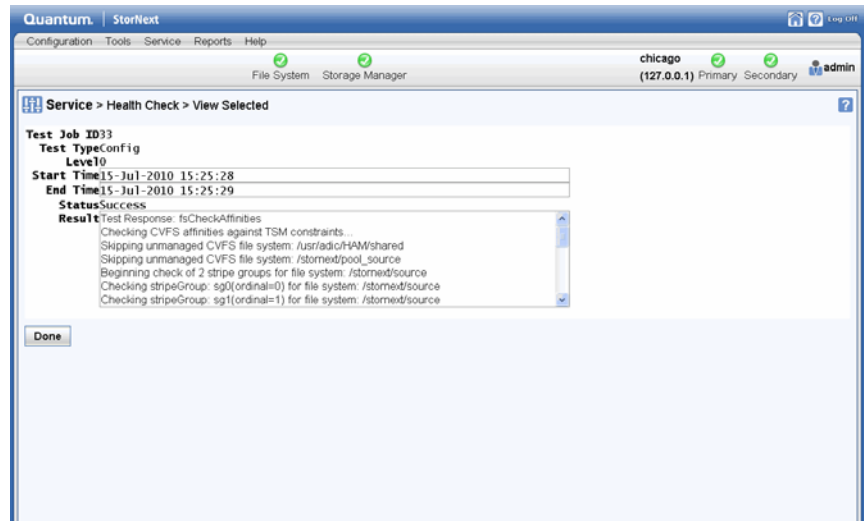


Viewing Health Check Histories

You can also view a history (up to five runs) of each health check test that has been run. This can be useful for comparing results over a time span.

- 1 Select the tests whose history you want to view.
- 2 Click **History**. The **Service > Health Check > View History** screen appears.

Figure 103 Health Check > View History Screen

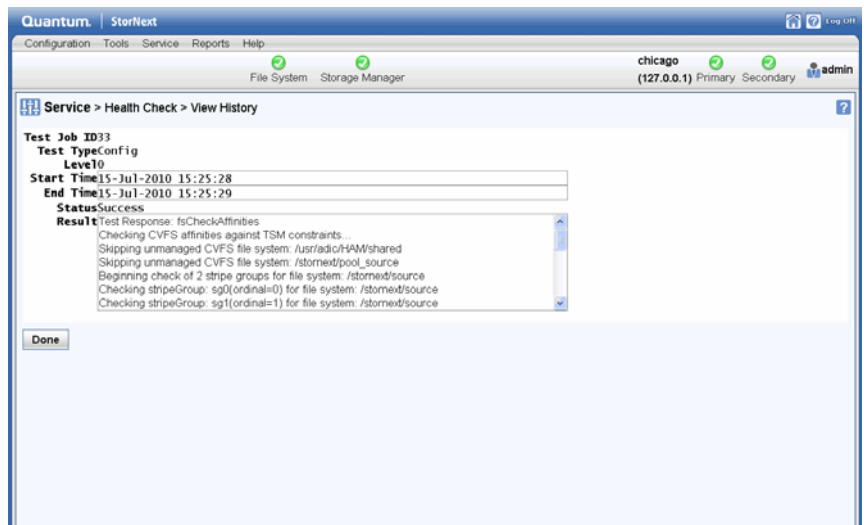

- 3 When you are finished viewing history information, click **Done** to return to the **Service > Health Check** screen.

The Capture State Function

The StorNext Capture State feature enables you to create a log that captures the current state of your system. This log assists Quantum support personnel analyze and debug some problems in the storage system.

Running Capture State creates a log file named using the format "snapshot-machinehostname-YYYYMMDDHHMMSS.tar.gz.."

This file contains a summary report that is produced by executing the `pse_snapshot` command on all component config/filelist files.


If desired, you can download or delete a previously captured file.

Creating a Capture State Log

Follow this procedure to create a Capture State log:

- 1 Choose **Capture State** from the **Service** menu. The **Service > Capture State** screen appears. Any previously captured snapshots are shown.

Figure 104 Capture State Screen

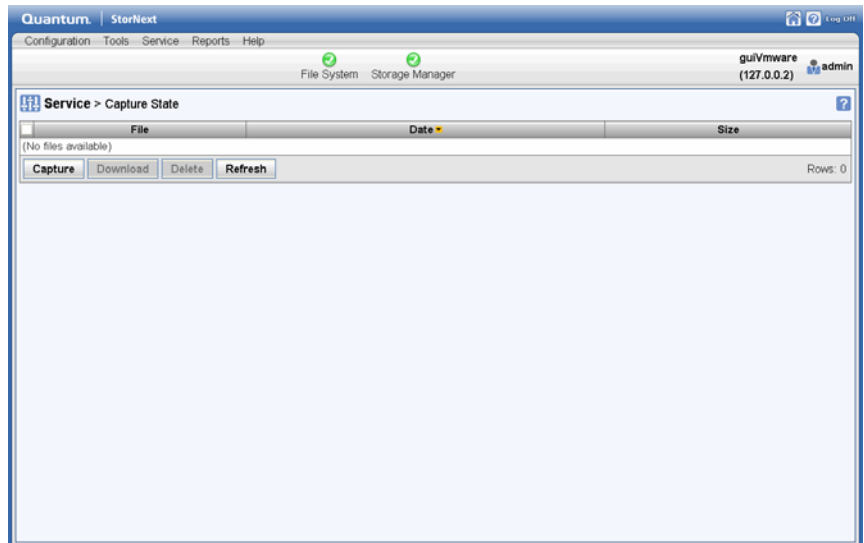

- 2 Click **Capture**. The **Capture State Status** window is shown. The capture file appears after the process completes.
- 3 Click **Download** to save the generated file.
- 4 To view the file, choose the **Open with** option and then click **Browse** to navigate to an application such as WinZip capable of reading tar.gz files.
- 5 To save the file, choose the **Save to Disk** option and then navigate to the location where you want to save the file.

Deleting a Previous System State Capture

Follow this procedure to delete an unwanted Capture State file.


- 1 If you have not already done so, choose **Capture State** from the Service menu. The **Service > Capture State** screen appears. (See [Figure 104](#) on page 205.) All previously captured snapshots are shown.
- 2 Select the file you want to delete, and then click **Delete**.
- 3 When a confirmation screen prompts you to confirm that you want to delete the file, click **Yes** to continue or **No** to abort.
- 4 After the status screen informs you that the file was successfully deleted, click **OK**.

The System Backup Function

The Service menu's Backup option allows you to perform a full or partial backup.

- 1 Choose **Backups** from the **Service** menu. The **Service > Backup** screen appears.

Figure 105 Backup Screen

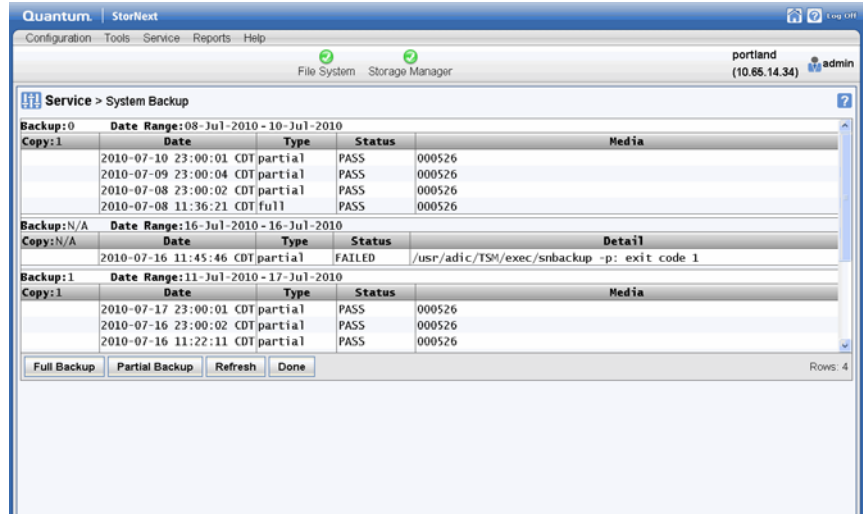

- 2 Click **Full Backup** to perform a full backup, or click **Partial Backup** to perform a partial backup.
- 3 After a message informs you that the backup was initiated successfully, click **OK**.

The Admin Alerts Function


Admin alerts are informational messages about system activities you might want to be aware of, but are not necessarily an error condition. For example, issues related to the Distributed Data Mover feature generate admin alerts. Admin alerts typically do not require any action from StorNext users.

There are different types of admin alerts. Here are some conditions that could produce an admin alert:

- TSM Health Checks disk space warning
- TSM Intrusive Health Checks when drives are mounted
- MSM media console errors

- MSM drive dismount request when drive is already dismounted
 - MSM media audit failures
- 1 To view admin alerts, select **Admin Alerts** from the **Service** menu. The **Service > Admin Alerts** screen appears.

Figure 106 Admin Alerts
Screen

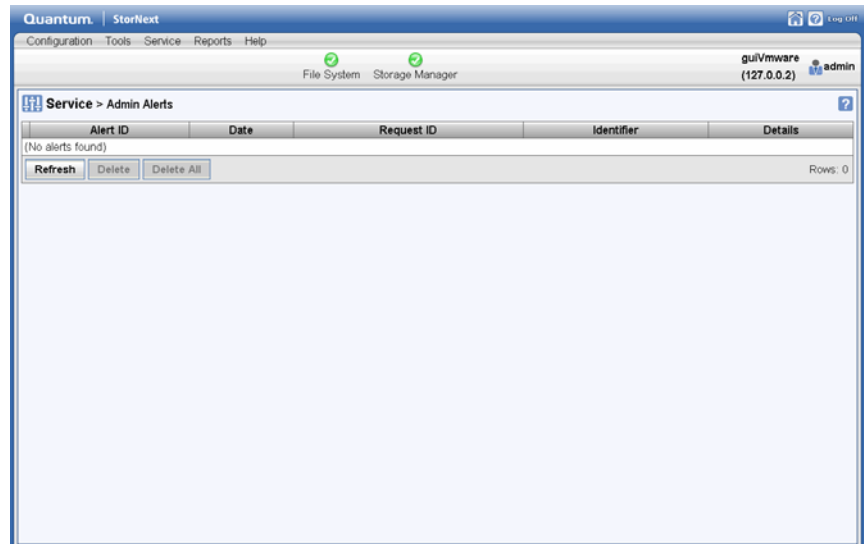

- 2 On the **Service > Admin Alerts** screen you can do any of the following:
 - View a specific alert by scrolling to the right of the screen (if the alert is longer than can be displayed on one screen)
 - Refresh (update) the list by clicking the **Refresh** button
 - Delete an individual alert by selecting the desired alert and then clicking the **Delete** button
 - Delete all alerts by clicking the **Delete All** button

The Tickets Function


The Service menu's Tickets option allows you to view a list of RAS tickets that relate to system faults or errors. Ticket details provide a summary of the system fault, an area for Analysis notes, and contains a Recommended Actions link to help you correct the fault. On this screen you can view the ticket number, current status, priority, date and time the ticket was last updated, and a brief summary of the error condition.

If desired, you can click the column headers to change the sorting. For example, click the Ticket heading to display tickets in ascending or descending numerical order.

Viewing Ticket Information

- 1 From the StorNext home page, choose **Tickets** from the **Service** menu. The **Service > Tickets** screen appears.

Figure 107 Tickets Screen

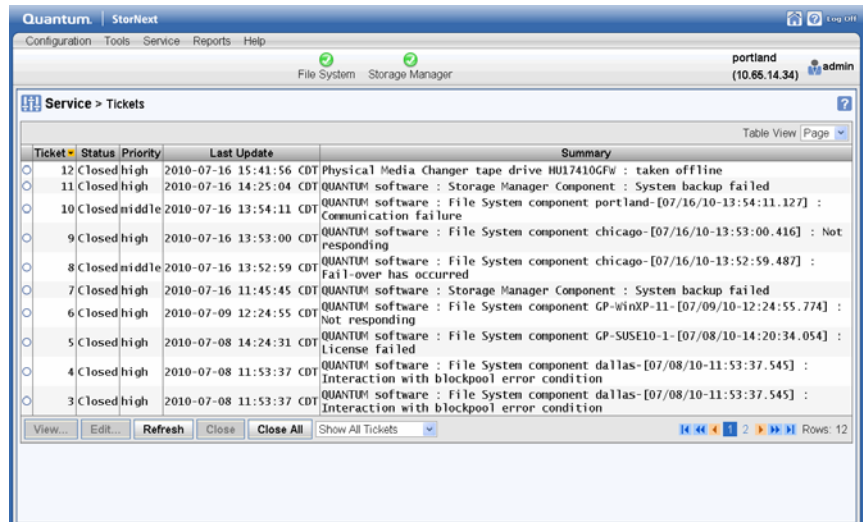


The **Service > Tickets** screen provides the following information:

- **Ticket:** The RAS ticket number, displayed in the order in which it was created

- **Status:** The ticket's current status: OPEN or CLOSED
 - **Priority:** The ticket's priority based on system impact: HIGH, MEDIUM, or LOW
 - **Last Update:** The date of the last system status update
 - **Summary:** A short summary of the fault that triggered creating the RAS ticket
- 2 If desired, change the display by choosing **Show All Tickets**, **Show Closed Tickets**, or **Show Open Tickets** in the dropdown list at the bottom of the screen.
 - 3 Highlight the ticket you wish to view, and then click **View**. The **Service > Tickets > View Ticket > [number]** screen appears.

Figure 108 Tickets > View Ticket Screen

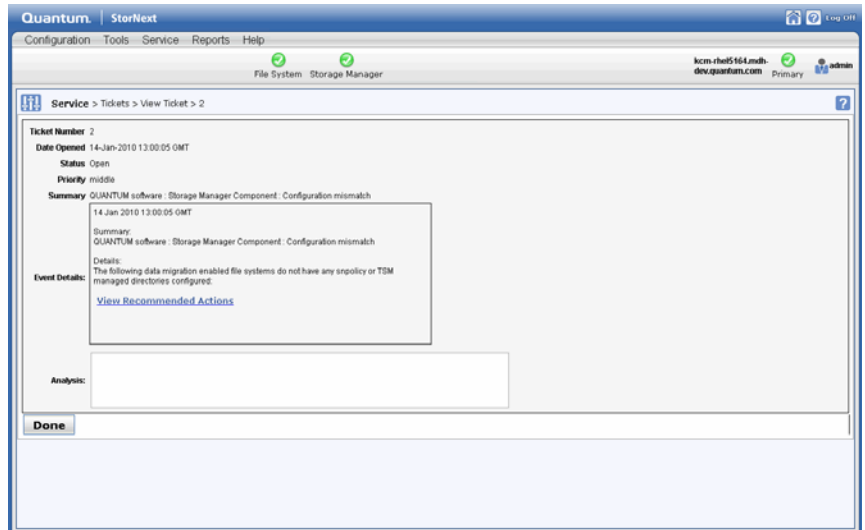

This screen provides the following information:

- **Ticket Number:** The number of the ticket in the displayed ticket list
- **Date Opened:** The date and time the ticket was created
- **Status:** The current status of the ticket: OPEN or CLOSED
- **Priority:** The ticket's priority based on system impact: HIGH, MEDIUM, and LOW


- **Summaries:** A brief description of the ticket.
 - **Event Details:** Detailed information about event that triggered the ticket, including a link that allows you to View Recommended Actions which will help you correct the fault or condition
 - **Analysis:** Any user-entered comments pertaining to the fault or condition, such as a recommended action
- 4 To see recommended actions for the ticket, click the **View Recommended Actions** link. The **Recommended Actions** screen appears provides information and steps to correct the condition or fault that generated the RAS ticket. Follow the instructions on the screen to correct the condition or fault. When you are finished viewing the recommended actions, close the window.
 - 5 When you are finished viewing ticket information, click **Done** to return to the **Service > Tickets** screen.

Editing Ticket Information

Follow this procedure to add comments or notes to the ticket in the **Analysis** field:

- 1 Select the desired ticket and then click **Edit**. The **Service > Tickets > Edit Ticket > [number]** screen appears.

Figure 109 Tickets > Edit
Ticket Screen

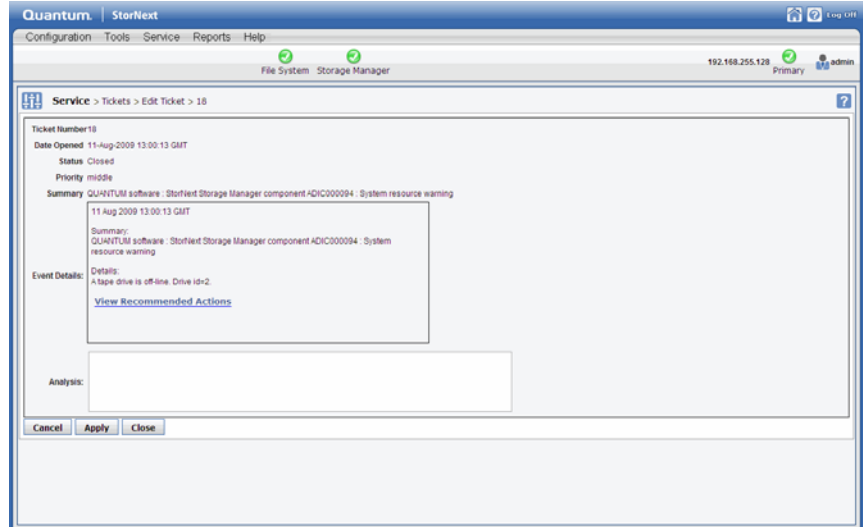

- 2 Make your comments or notes in the **Analysis** field.
- 3 Click **Apply** to save your changes. When you are ready to return to the previous screen, click **Close**. (To return to the previous screen without saving your changes, click **Cancel**.)

Closing Tickets

When you no longer need to retain ticket information, you can close (delete) selected tickets or all tickets by following this procedure:

- 1 To close a specific ticket, select the desired ticket and then click **Close**.
- 2 To delete all tickets, click **Close All**.



Chapter 9

Converting to HA

The StorNext High Availability (HA) feature allows you to operate a redundant server that can quickly assume control of the primary server's operations in the event of software, hardware and network failures.

This chapter describes how to configure HA for StorNext. For a much more detailed discussion about how HA works, see [Appendix C, High Availability Systems](#).

HA Overview

The StorNext HA feature is a special StorNext configuration with improved availability and reliability. The configuration consists of two similar servers, shared disks and possibly tape libraries. StorNext is installed on both servers. One of the servers is dedicated as the initial primary server and the other the initial standby server.

StorNext File System and Storage Manager run on the primary server. The standby server runs StorNext File System and special HA supporting software.

The StorNext failover mechanism allows the StorNext services to be automatically transferred from the current active primary server to the standby server in the event of the primary server failure. The roles of the servers are reversed after a failover event. Only one of the two servers is

allowed to control and update StorNext metadata and databases at any given time. The HA feature enforces this rule by monitoring for conditions that might allow conflicts of control that could lead to data corruption.

StorNext provides two main HA functions: **Convert (to) HA** and **Manage HA**.

HA Terms and Concepts

This section defines key terms and concepts you should become familiar with before converting to an HA system.

Failover

Failover is the process of passing control of a file system from an FSM on one MDC to a standby FSM on a redundant MDC. When that FSM is for the HaShared file system, Primary status transfers to the redundant MDC along with all the processing that occurs only on the Primary MDC. This includes all the HaManaged FSMs, the Storage Manager processes, and the blockpool server. When an FSM does not relinquish control cleanly, an HA Reset can occur to protect against possible corruption of file system metadata and Storage Manager databases. (See Primary Node and Secondary Node.)

Primary Node

The *primary node* is the main server in your configuration. Processing occurs on this server until system failure makes it necessary to switch to another server. Also known as the *local node*. The primary status is transient and dynamic, not fixed to a specific machine.

Secondary Node

The *secondary node* is the redundant or secondary server in your configuration. If your primary server fails or shuts down, processing automatically moves to this secondary server so there is no interruption in processing. Like primary status, the secondary status is transient and dynamic, not fixed to a specific machine. Also known as the *peer node*.

Virtual IP (vIP)

Virtual IP or *vIP* is a fixed IP address that is automatically associated with the Primary MDC to provide a static IP address for replication and deduplication access to the target server in an HA cluster, and for access to the blockpool.

Following are some general requirements for vIP addresses as they apply to HA:

- 1 The vIP should be static (currently StorNext supports only static IP for HA).
- 2 The NIC should have a *physical* IP address assigned.
- 3 The vIP should be a real and unique IP address.
- 4 The vIP should be reachable by other nodes, and you should also be able to reach other nodes from the vIP address. For this reason, Quantum recommends that the vIP address be on the same subnet of the physical IP address of the same NIC.

When the NIC is also involved in multilink communication, the following additional requirement applies:

- 1 The grouping address (taking the first configured maskbits of the IP address) of the physical and vip IPs on the same NIC should be the same, and unique on the node.

Your local Network Administrator should provide a reserved IP address and netmask for this purpose.

Virtual Netmask

This is a 32-bit mask used to divide a virtual IP address into subnets and specify the network's available hosts.

HA Reset

This is the HA mechanism introduced in StorNext 4.0 to replace the previous *STONITH* mechanism. Like *STONITH*, HA Reset also has two nodes with one operating as primary or active node, and the other operating as the secondary or standby node. The primary node can reset itself on the hardware level. This new HA feature does not require a power brick to reset a node.

Preparing for HA Conversion

Before you convert to an HA system, you should assess your needs and current configuration. At a minimum, both the primary and secondary node should meet the minimum configuration requirements outlined in the *StorNext Installation Guide*.

You will also need to reserve an IP address in your local domain for use as the virtual IP address for using the HA cluster as a replication/deduplication target, so obtain an IP address and netmask from your network administrator.

Caution: Before you attempt this or any other major system configuration change, you should make a complete backup before proceeding.

Pre-Conversion Steps

Before converting to HA, you should perform the following steps:

- 1 Identify two servers, which must have similar hardware running the same version of Linux, and have identical LAN and SAN connectivity. For example, on multiple Ethernet port connections, both systems must be connected to the same Ethernet ports (eth0 on System A and System B going LAN1, eth1 on System A and System B going to LAN2, etc.)
- 2 Synchronize the clocks on both systems.
- 3 Install StorNext on both servers.
- 4 Enter StorNext license information on both server nodes.

Note: Although licenses must be entered on both HA MDCs, StorNext must be run only on the secondary for this purpose.

Also, if you manually edit the `license.dat` file, you must restart StorNext after making changes.

- 5 Launch StorNext on one server.

- 6 Configure an unmanaged file system for use as the HA shared file system. (For more information about creating a file system, see [Step 4: File Systems](#).)

HA and Distributed LAN Clients

On a StorNext HA system using the StorNext Distributed LAN Client/Server (DLC) feature:

When configuring DLC Server on the MDCs of an HA cluster, it must be configured by-hand on each MDC. Service will be lost when an HA Reset occurs, so DLC clients should be configured to access the DLC file systems through both MDCs.

This practice allows for the best and highest availability of the DLC capability. Ideally, each node in the HA pair should have the same number of NICs and be on the same networks.

Converting to HA

This section describes the configuration steps necessary to convert a node to a primary HA server. Converting to HA consists of selecting your dedicated unmanaged StorNext file system for use as the controlling shared file system, and then instructing StorNext to convert the node to HA.

Note: The **Convert** menu option will be unavailable (grayed out) on the **Tools** menu if you do not have a secondary system. If you have not already done so, specify a secondary system by using the Name Servers function. For more information, see [.Step 3: Name Servers](#) on page 31.

Following are some other things you should be aware of concerning the HA conversion process:

- The conversion process converts one node at a time. The second node should be converted as soon as possible after the first node.
- StorNext operating files will be moved to the HaShared file system, and this move cannot easily be reversed.


- Following conversion, the Primary server is identified by the vIP for Replication/Deduplication.
- Replication/Deduplication policies must be changed to use the vIP:
 - The global policy for each file system must use it as the “Address for Replication and Deduplication”
 - Replication policies must use it as the Target for Replication Schedules
 - If multilink is configured, the vIP address should be used.

HA Conversion Procedure

Follow these steps to configure HA:

- 1 Choose **High Availability > Convert** from the **Tools** menu. The **Tools > High Availability** screen appears.

Figure 110 Tools > HA Screen

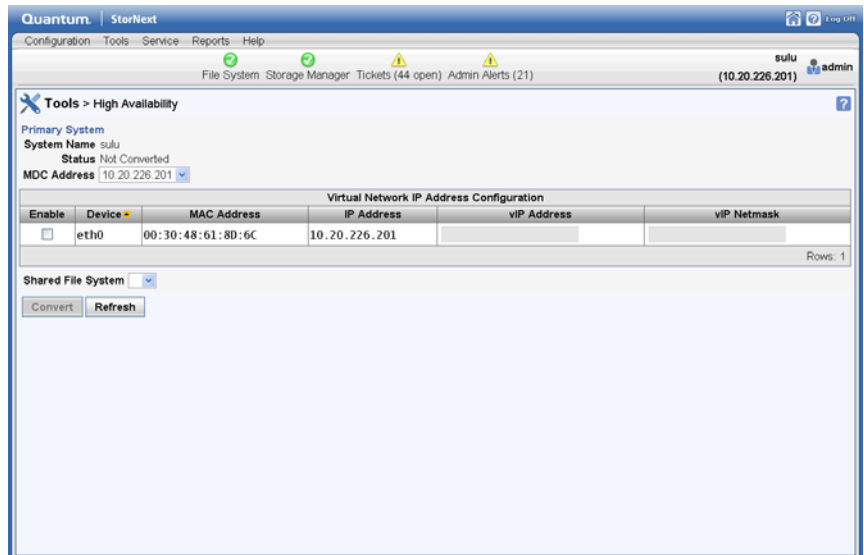

- 2 At the **Shared File System** field, select the shared file system you want to convert to HA.
- 3 At the **MDC Address** field, select one IP address to be placed in the `ha_peer` file for use in administrative operations between the MDCs in the HA Cluster.

- 4 If your HA cluster also runs the blockpool, select **Enable** and then enter the virtual IP address and virtual netmask. (Ask your network administrator for the vIP address and netmask.)
- 5 Click **Convert** to convert the primary node to HA.
- 6 Enter the IP address of the secondary system on the same LAN, and then click **Scan**. If you do not already have licenses for the secondary system in the license file, you will be required to switch to the license page to import them before continuing. (The information comes from the individual `license.dat` files on both MDC's. StorNext merges the two into one file before converting the secondary.)

7

Note: Until you have performed the scan, you cannot import the license file for the secondary system using StorNext's import function. After you have performed the scan you can import licenses for the secondary. Following the conversion to HA, the license file will contain both primary and secondary licenses and will be present on both servers.

- 8 Click **Convert** to convert the secondary system.

Managing HA


The StorNext Manage HA screen is used to monitor the current statuses of your primary and secondary servers.

The screen includes **Enter Config Mode** and **Exit Config Mode** buttons to place the HA Cluster in a state that allows the Primary MDC to restart CVFS and individual FSMs without incurring an HA Reset, failover of any file systems, or transfer of Primary status to the peer MDC. This is required for making configuration changes to the HaShared file system through the GUI.

Follow these steps to lock the HA cluster and enter Config mode, and subsequently to exit Config mode:

- 1 Choose **High Availability > Manage** from the **Tools** menu. The **Manage High Availability** screen appears.

Figure 111 Manage HA Screen

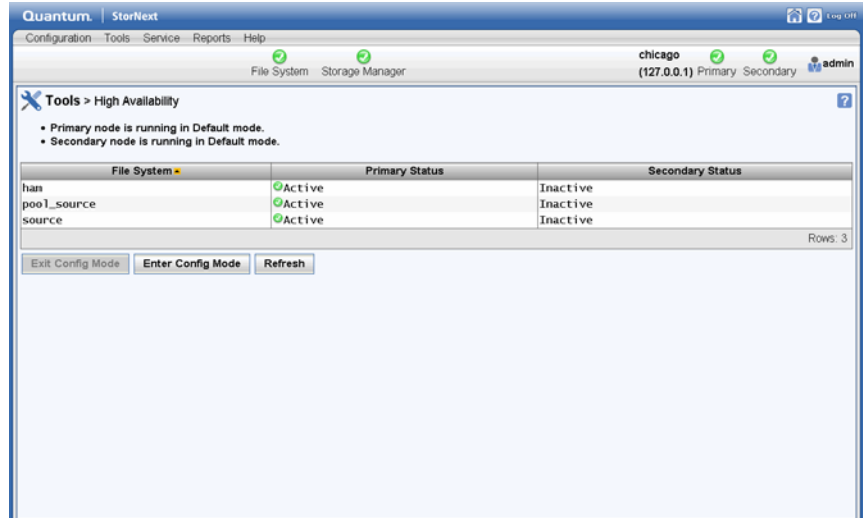

- 2 Click **Enter Config Mode**.
- 3 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 4 Click **OK** when a message informs you that the HA cluster was successfully locked.
- 5 When you are ready to unlock the cluster and exit Config mode, click **Exit Config Mode**. All file systems will be stopped on the primary MDC and then restarted on both MDCs.
- 6 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 7 Click **OK** when a message informs you that the HA cluster was successfully unlocked.

HA Statuses and Reporting

StorNext does not currently have a report that monitors and tracks HA activity. Also, because failover is an event and not an activity, HA status is not recorded as a StorNext job.

The best way to track HA status is through the High Availability Manage screen previously described.

Troubleshooting HA

The Troubleshooting appendix in this guide contains simple troubleshooting procedures pertaining to HA. For more information, see [Troubleshooting](#).



Chapter 10

StorNext Reports


The Reports Menu contains the following options:


- [StorNext Logs](#): Access logs of StorNext operations
- [The Jobs Report](#): View a list of pending and completed jobs on the system
- [The File Systems Report](#): View file system statistics including active clients, space, size, disks, and stripe groups
- [The SAN Devices Report](#): View information about devices currently attached to your SAN, including disks/LUNs, libraries, and tape drives
- [The Media Report](#): View information pertaining to the media in selected libraries or all libraries, including the media ID, type and class, as well as the number of files and the last access date and time
- [The Tape Consolidation Report](#): View statistics on the tape consolidation (defragmenting) process
- [The SAN and LAN Clients Report](#): View statistics for StorNext clients, including the number of connected clients and distributed LAN clients, and client performance
- [The LAN Client Performance Report](#): View information about distributed LAN clients and servers, including read and write speed


- [Replication Deduplication Reports](#)
 - [Policy Activity Report](#): View replication and deduplication performance statistics
 - [Policy Summary Report](#): View replication and deduplication information for each policy
- [The Distributed Data Mover Report](#): View activity related to the Distributed Data Mover feature.


Report Navigation Controls


If a log or report spans more than one screen, navigation controls at the bottom of the screen allow you to select a page by number, or to view one of these pages.




Click  to go to the first page

Click  to skip backwards ten pages

Click  to go to previous page

Click  to go to the next page

Click  to skip ahead ten pages

Click  to go to the last page

Click a specific page number  to go to that page

StorNext Logs

Report menu options enable you to access and view any of the following types of logs:


- **StorNext Logs**: Logs about each configured file system

- **File Manager Logs:** Logs that track storage errors, etc. of the Storage Manager
- **Library Manager Logs:** Logs that track library events and status
- **Server Logs:** Logs that record system messages
- **StorNext Web Server Logs:** Various logs related to the web server
- **StorNext Database Logs:** Logs that track changes to the internal database

Use the following procedure to access the StorNext log files. The process is the same regardless of the type of log you are viewing.

- 1 Select **Logs** from the **Reports** menu. The **Reports > Logs** screen appears.

Figure 112 Reports > Logs Screen

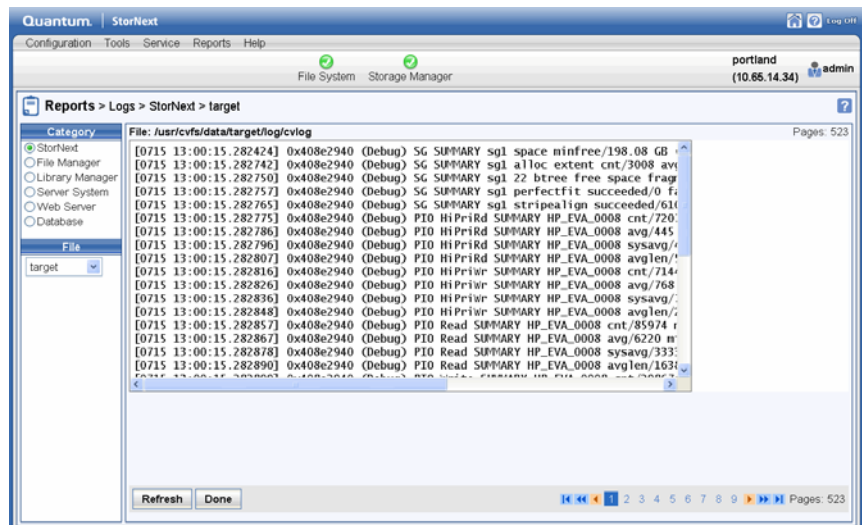

- 2 On the left side of the screen, select the type of log you wish to view.
- 3 If desired, select a file system different from the default one shown beneath the log categories.

The log you selected automatically appears. (If the log does not appear, click **Refresh**.) If the log spans more than one screen, use the navigation controls at the bottom of the screen as described in [Report Navigation Controls](#) on page 224.

The Jobs Report

The Jobs Report provides information about previously run jobs on your file systems. Jobs include all actions performed for file systems, such as make, stop, start, check, and so on. Use the navigation controls at the bottom of the screen if there are multiple screens of jobs.

Use the following procedure to run the Jobs Report.

- 1 Choose **Jobs** from the **Reports** menu. The **Reports > Jobs** report appears.

Figure 113 Jobs Report

ID	Job	Attributes	User	Start Time	End Time	Status
51	RAS Tickets Close All		admin	2010-07-16 15:59:26 CDT	2010-07-16 15:59:26 CDT	Success
50	Media Dismount		admin	2010-07-16 15:51:20 CDT	2010-07-16 15:51:20 CDT	Failure
49	Tape Drive Modify	2 ON		2010-07-16 15:44:03 CDT	2010-07-16 15:44:04 CDT	Success
48	Tape Drive Modify	1 ON		2010-07-16 15:44:03 CDT	2010-07-16 15:44:03 CDT	Success
47	Media Dismount		admin	2010-07-16 15:43:05 CDT	2010-07-16 15:43:07 CDT	Failure
46	Tape Drive Modify	2 ON		2010-07-16 15:42:32 CDT	2010-07-16 15:42:32 CDT	Success
45	Tape Drive Modify	1 ON		2010-07-16 15:42:11 CDT	2010-07-16 15:42:11 CDT	Success
44	Media Dismount		admin	2010-07-16 15:40:41 CDT	2010-07-16 15:41:18 CDT	Success
43	Media Dismount		admin	2010-07-16 15:39:38 CDT	2010-07-16 15:40:15 CDT	Success
42	Store Files	1000	admin	2010-07-16 15:12:51 CDT	2010-07-16 15:21:35 CDT	Failure

The Jobs Report includes the following information:

- **ID:** The job ID number.
- **Job:** The job name assigned by StorNext for the type of action performed (for example, "FileSystem Make").
- **Attributes:** The name of the related file system, mount point, policy, etc. on which the job was performed. For example, if the job was to start the file system, the name of that file system appears in the Attributes column.
- **User:** The logged in user who initiated the job.

- **Start and End Time:** The times the job was started and ended.
- **Status:** The job's final or current status, such as Success or Failure.

Viewing Detailed Job Information

To view detailed information about a specific job, select the desired job and then click **View** to see the information on a new screen. When you are finished viewing that job's information, click **Done**.

Filter Options

The **Status Filter** at the bottom of the screen allows you to refine the displayed list of jobs according to Success, Failure, Warning, Working, Unknown, or All. Choose one of these criteria to restrict the displayed list of jobs to your selection. After you select a Status Filter option, click **Refresh** to resort and view the jobs list with your selected criteria.

The **Type Filter** works either together or separately from the Status Filter. The Type Filter allows you to refine the displayed list of jobs according to a specific job action:

All	Tape Drive Modify	File System Start	File System Metadump
Unknown	Media Add	File System Stop	Cancel Request
Policy Add	Media Delete	File System Check	System Service Start
Policy Delete	Media Modify	File System Rename	System Service Stop
Policy Modify	Media Move	File System Expand	Convert to HA
Run Store Policy	Media Remove	File System Scan For New Storage	Store Files
Schedule Add	Media Eject	RAS Ticket Close	Change File Version
Schedule Delete	Media Purge	RAS Ticket Close All	Recover Files

Schedule Modify	Media Mount	RAS Ticket Analysis Update	Recover Directory
Schedule Reset	Media Dismount	Email Server Add	Retrieve Files
Storage Disk Add	Media Reclassify	Email Server Delete	Retrieve Directory
Storage Disk Delete	Media Assign to Policy Class	Email Server Modify	Truncate Files
Storage Disk Modify	Media Transcribe	Email Notification Add	Move Files
File System Add	Media State Change	Email Notification Delete	Modify File Attributes
File System Delete	Media Clean by Media ID	Email Notification Modify	Health Check
File System Modify	Media Clean by File System	NAS Share Add	Capture State
File System Move Stripe Groups	Media Clean by Policy Class	NAS Share Delete	Add Drive Pool
Library Add	Media Import Mailbox	CIFS Shares Delete All	Delete Drive Pool
Library Delete	Media Import Bulk Load	CIFS Windows Domain Join	Add Email Contact
Library Modify	File System Make	CIFS Windows Domain Leave	Modify Email Contact
Tape Drive Add	File System Mount	CIFS Workgroup User Add	Delete Email Contact
Tape Drive Delete	File System Unmount	System Date/Time Modify	System Backup

Exiting the Jobs Report screen.

When you finished viewing the Jobs Report, click **Done**.

The File Systems Report

The File Systems Report provides a list of parameters and statistics about configured StorNext file systems.

Use the following procedure to run the File System Report.

- 1 Choose **File Systems** from the **Reports** menu. The **Reports > File Systems** report appears.

Figure 114 File Systems Report

File System Name	Content	Mounted on	Status	Read	Write	Total Space	Reserved Space	Free Space	Depth	Breadth	Multipath Method	Realtime IO Limit	Realtime Bandwidth Limit	Realtime IO Commit	Non-realtime IO Reserve	Non-realtime Clients	Non-realtime IO Hint
pool_target	MJ	/stormext/pool_target	Up	Enabled	Enabled	99.98 GB	0 B	99.92 GB	1	4 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
pool_target	MJ	/stormext/pool_target	Up	Enabled	Enabled	99.98 GB	0 B	99.92 GB	1	4 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
target	MJ	/stormext/target	Up	Enabled	Enabled	99.98 GB	0 B	99.42 GB	1	4 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
target	MJ	/stormext/target	Up	Enabled	Enabled	99.98 GB	0 B	99.42 GB	1	4 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
pool_target	U	/stormext/pool_target	Up	Enabled	Enabled	99.99 GB	4.13 GB	96.21 GB	2	2 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
pool_target	U	/stormext/pool_target	Up	Enabled	Enabled	99.99 GB	4.13 GB	96.21 GB	2	2 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
target	U	/stormext/target	Up	Enabled	Enabled	199.98 GB	4.13 GB	196.81 GB	2	2 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec
target	U	/stormext/target	Up	Enabled	Enabled	199.98 GB	4.13 GB	196.81 GB	2	2 MB	Rotate	0/sec	0/sec	0/sec	0/sec	0	0/sec

The File Systems Report provides the following information about your file systems.

- **File System Name:** The name of the file system
- **Mount Point (“Mounted on”):** The file system's mount point location
- **Status:** The file system’s current status, indicated a green check mark icon (Active), a yellow exclamation mark icon (Warning), or a red X icon (Stopped).

- 2 When you finished viewing report information, click **Done**.

The SAN Devices Report

The SAN Devices Report shows a list of details for all currently configured devices attached to your SAN.

Use the following procedure to run the SAN Devices Report.

- 1 Choose **SAN Devices** from the **Reports** menu. The **Reports > SAN Devices** report appears.

Figure 115 SAN Devices Report

Quantum | StorNext
Configuration Tools Service Reports Help
File System Storage Manager
portland (10.65.14.34) admin

Reports > SAN Devices
Current SAN Devices

Disks/LUNs						
Serial Number	Type	Label	Size	Status	Used	File System
60014380024D2E990001400000290000	GENERIC_209696735	HP_EVA_0001	99.99 GB	up	false	
60014380024D2E9900014000002C0000	GENERIC_209696735	HP_EVA_0002	99.99 GB	up	false	
60014380024D2E9900014000002F0000	GENERIC_209696735	HP_EVA_0003	99.99 GB	up	false	
60014380024D2E990001400000850000	GENERIC_209696735	HP_EVA_0004	99.99 GB	up	false	
60014380024D2E990001400000880000	GENERIC_209696735	HP_EVA_0005	99.99 GB	up	false	
60014380024D2E9900014000008D0000	GENERIC_209696735	HP_EVA_0006	99.99 GB	up	false	

Rows: 13

Libraries and Tape Drives (Some devices may not show up immediately. Click Refresh to update.)			
Serial Number	Product ID	Device Type	Device Path
HU1732085N	Ultrium 4-SCSI	Tape Drive	/dev/sg29
HU17410GFw	Ultrium 4-SCSI	Tape Drive	/dev/sg28
QP0739BDC00082	SCALAR50	Tape Library	/dev/sg30

Rows: 3

Refresh Done

The SAN Devices Report provides the following information:

- **Disks and LUNs**
 - **Serial Number:** The disk's or LUN's serial number or path name.
 - **Type:** The device type.
 - **Label:** The label, if any, assigned to the device.
 - **Size:** The total capacity for the device.
 - **Status:** The device's current status. Statuses include:

- **Used:** Indicates whether the device is currently in use (true or false).
 - **File System:** The name of the file system with which the device is associated.
 - **Libraries and Tapes Drives**
 - **Serial Number:** The serial number of the library or tape drive.
 - **Product ID:** The model number or product name of the library or tape drive.
 - **Device Type:** The type of device: Tape Library or Tape Drive.
 - **Device Path:** The path name for the device.
- 2 If desired, click **Refresh** to manually update (refresh) the report data.

The Media Report

The Media Report shows a list of details for all media in a selected library or all libraries.

Use the following procedure to run the Media Report.

- 1 Choose **Media** from the **Reports** menu. The **Reports > Media** report appears.

Figure 116 Media Report

Media ID	Library	Media Type	Media Class	Policy Class	Suspect	Write Protected	File Count	Mounted in Drive	Last Accessed
<input type="checkbox"/> 000001	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000010	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000011	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000012	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000013	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000014	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000015	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000016	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000017	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000018	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT
<input type="checkbox"/> 000019	archive01	LTO	F0_LTO_DATA	Scratch Pool	No	No	0		2010-10-06 07:59:15 MDT

2 Select from the **Library** pulldown list one of these options:

- **All Libraries:** Select this to view information for all media in all libraries
- **A selected library:** Select a specific library whose media information you want to view

3 Select from the **Media Class** pulldown list one of these options:

- **Show All Media Classes:** Display information for all media in all classes
- **Show Data Media Class:** Display only information for media available to be used for data migration that are not considered full
- **Show Migrate Media Class:** Display only information for media used for data migration which are considered full
- **Show Blank Media Class:** Display only information for blank media
- **Show Clean Media Class:** Display only information for cleaning media
- **Show Backup Media Class:** Display only information for media used for backup purposes


- 4 If desired, enter one or more characters at the **Media ID** field to restrict the list of media to those whose IDs contain the character(s).
- 5 Click **Filter** to apply the filtering options.
- 6 To update the information displayed, you can click **Refresh** at any time.

The Media Report provides the following information for each piece of media that meets the criteria you selected from the **Library**, **Media Class** and **Media ID** fields:

- **Media ID:** The unique identifier for the media
 - **Library:** The name of the library in which the media currently resides
 - **Media Type:** The type of media
 - **Media Class:** The media class to which the media belongs
 - **Policy Class:** The policy class to which the media belongs
 - **Suspect:** Indicates whether the media is considered suspect (possibly unreliable or defective)
 - **Write Protected:** Indicates whether the media is write protected
 - **File Count:** The number of files saved on the media
 - **Mounted in Drive:** Indicates whether the media is currently mounted in a drive
 - **Last Accessed:** Indicates the date and time when the media was last accessed
- 7 To view a report for a particular piece of media, select the desired media from the list. To select multiple media, hold down the Control key while you click additional media. To select all media, click the checkbox to the left of the **Name** heading.

After you have selected media, click **View Media Information Report**. This report allows you to see all files on the selected media. The report looks similar to the one shown in [Figure 117](#).

Figure 117 Media Information Report

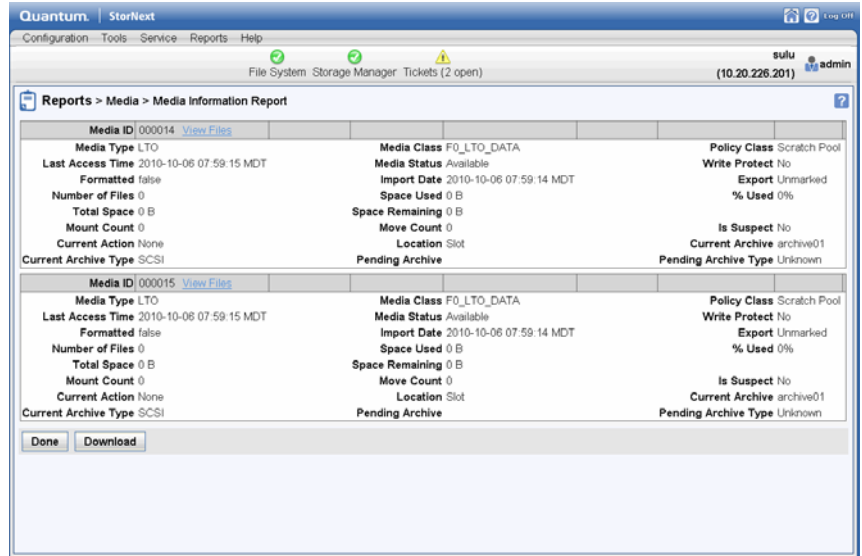

- 8 If desired, you can save the report output as a CSV file (Microsoft Excel format) by clicking **Download**.
- 9 When you are finished viewing the information report, click **Done**.


The Tape Consolidation Report

The Tape Consolidation Report shows information about the tape consolidation process, also known as defragmentation.

Use the following procedure to run the Tape Consolidation Report.

- 1 Choose **Tape Consolidation** from the **Reports** menu. The **Reports > Tape Consolidation** report appears.

Figure 118 Tape Consolidation Report

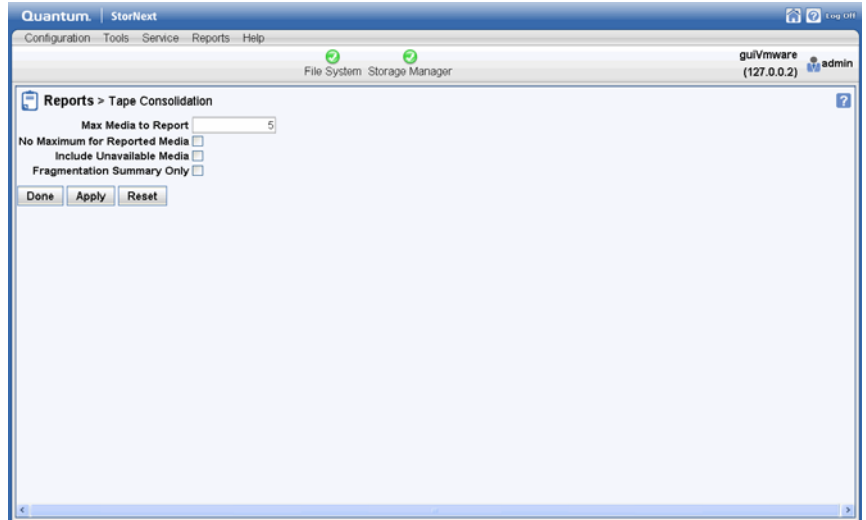

- 2 Enter the following fields which determine report parameters:
 - **Max Media to Report:** The maximum number of media included in the consolidation process
 - **No Maximum for Reported Media:** Indicate that there is no limit for the number of media included in the report
 - **Include Unavailable Media:** Specify whether to include currently unavailable media in the report
 - **Fragmentation Summary Only:** Specify whether to provide only a high-level summary of consolidation results
- 3 Click **Apply** to save and apply the report parameters you just entered.
- 4 When you are finished, click **Done** to generate the report.
- 5 The report is generated as a job. To view the report output, choose **Jobs** from the **Reports** menu and then select a Tape Consolidation Report job.
- 6 When you are finished review the report output, click **Done**.

The SAN and LAN Clients Report

The SAN and LAN Clients Report provides statistics for StorNext clients, including the number of StorNext SAN clients and distributed LAN clients, and client performance.

Use the following procedure to run the SAN and LAN Clients Report.

- 1 Choose **SAN and LAN Clients** from the **Reports** menu. The **Reports > SAN and LAN Clients** report appears.

Figure 119 SAN and LAN Clients Report

Server	Listening Interface (IP:Port)	TCP Window Size	Transfer Buffer Size	Transfer Buffer Count	Server Buffer Count	Daemon Threads
10.65.14.34	10.65.14.34:55661	0	0	0	0	0

The SAN and LAN Client Report provides the following information:

- **File System:** The name of the file system supporting the clients.
- **Mounted on:** The name of the file system mount point.
- **Status:** The file system's current status (Normal, Error, or Warning)
- **SAN Clients:** The total number of physically connected StorNext SAN clients, and the IP address of the current client.
- **Distributed LAN Clients:** The total number of StorNext distributed LAN clients.

- **Distributed LAN Servers:** The total number of distributed LAN servers for the file system.
 - **Server:** The names of the distributed LAN servers.
 - **Distributed LAN Clients:** The names of distributed LAN clients.
 - **Listening Interface (IP:Port):** The IP address and port number through which the distributed LAN server communicates with StorNext.
 - **TCP Window Size:** The TCP window size (in KB) used by the distributed LAN server. (Default: 64)
 - **Transfer Buffer Size:** The transfer buffer size (in KB) used by the distributed LAN server. A larger buffer may increase performance for larger files. (Default: 256)
 - **Transfer Buffer Count:** The number of transfer buffers used by the distributed LAN server. This parameter is used only by Windows servers and clients. Linux servers pass the value of this parameter to Windows clients. (Default: 16)
 - **Server Buffer Count:**
 - **Daemon Threads:** The maximum number of daemon threads used by the distributed LAN server. (Default: 8)
- 2 If desired, click **Refresh** to manually update (refresh) the report data.
 - 3 Click **Done** when you are finished viewing the report.


The LAN Client Performance Report

The LAN Client Performance Report provides information about distributed LAN clients, including read and write speed.

Use the following procedure to run the LAN Client Performance Report.

- 1 Choose **LAN Client Performance** from the **Reports** menu. The **Reports > LAN Client Performance** report appears.

Figure 120 LAN Client Performance Report

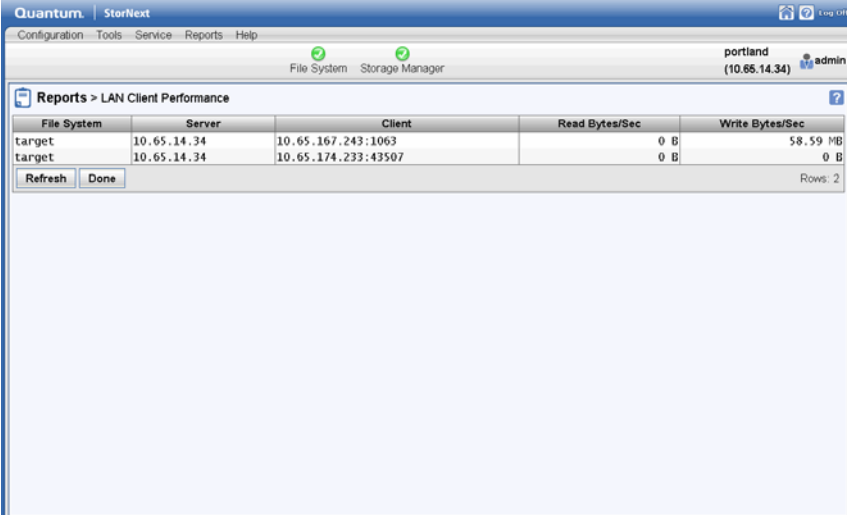

File System	Server	Client	Read Bytes/Sec	Write Bytes/Sec
target	10.65.14.34	10.65.167.243:1063	0 B	58.59 MB
target	10.65.14.34	10.65.174.233:43507	0 B	0 B

The LAN Client Performance Report provides the following information:

- **File System:** The name of the file system supporting the clients.
 - **Server:** The name of the distributed LAN server on the indicated file system.
 - **Client:** The name of the distributed LAN client for the indicated file system and distributed LAN server.
 - **Read Bytes:** The number of bytes read by the distributed LAN client.
 - **Write Bytes:** The number of bytes written by the distributed LAN client.
- 2 If desired, click **Refresh** to manually update (refresh) the report data.
 - 3 Click **Done** when you are finished viewing the report.


The Distributed Data Mover Report

The Distributed Data Mover Report shows a list of details pertaining to the Distributed Data Mover feature.

Use the following procedure to run the Distributed Data Mover Report.

- 1 Choose **Distributed Data Mover** from the **Reports** menu. The **Distributed Data Mover Report** appears.

Figure 121 Distributed Data Mover Report

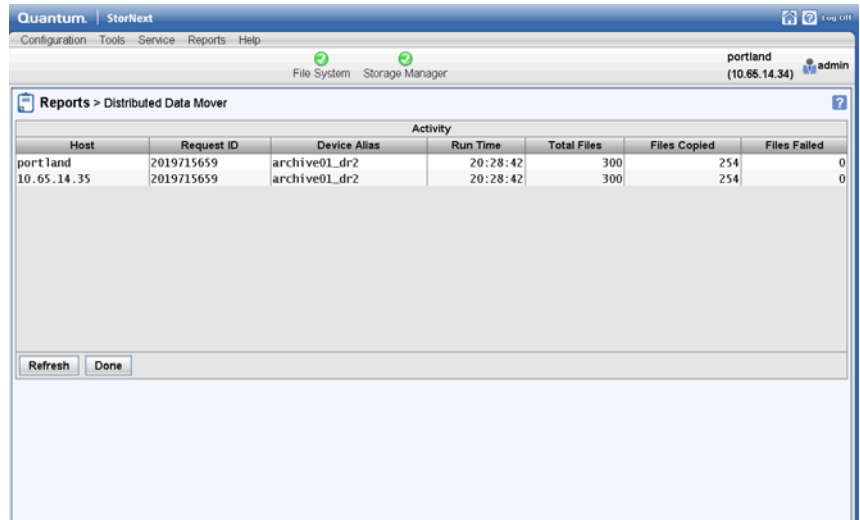

Host	Request ID	Device Alias	Activity			
			Run Time	Total Files	Files Copied	Files Failed
portland	2019715659	archive01_dr2	20:28:42	300	254	0
10.65.14.35	2019715659	archive01_dr2	20:28:42	300	254	0

The Distributed Data Mover Report provides the following information:

- **Host:** The name of the machine on which the source data resides.
- **Request ID:** The identification number for the move-data request.
- **Device Alias:** The alias of the destination device to which data is moved.
- **Run Time:** The time the data movement occurred.
- **Total Files:** The total number of files moved.

- **Files Copied:** The total number of files copied in the move-data process.
 - **Files Failed:** The number of files that were not moved during the move-data process
- 2 If desired, click **Refresh** to manually update (refresh) the report data.
 - 3 When you are finished viewing report information, click **Done**.

Replication Deduplication Reports

StorNext provides these reports that contain information pertaining to replication and deduplication:


- **Policy Activity:** This report shows statistics related to replication and deduplication. This report also provides statistics such as savings realized by replication, and the current progress of ongoing replications.
- **Policy Summary:** This report shows information about replication storage policies created to support the data replication and deduplication processes. This report also provides statistics such as savings realized by replication, and the current progress of ongoing replications.

Policy Activity Report

Use the following procedure to run the Replication/ Deduplication Policy Report.

- 1 Choose **Replication/ Deduplication > Policy Activity** from the **Reports** menu. The **Reports > Replication/ Deduplication > Policy Activity** report appears.

Figure 122 Replication/
Deduplication Policy Activity
Report

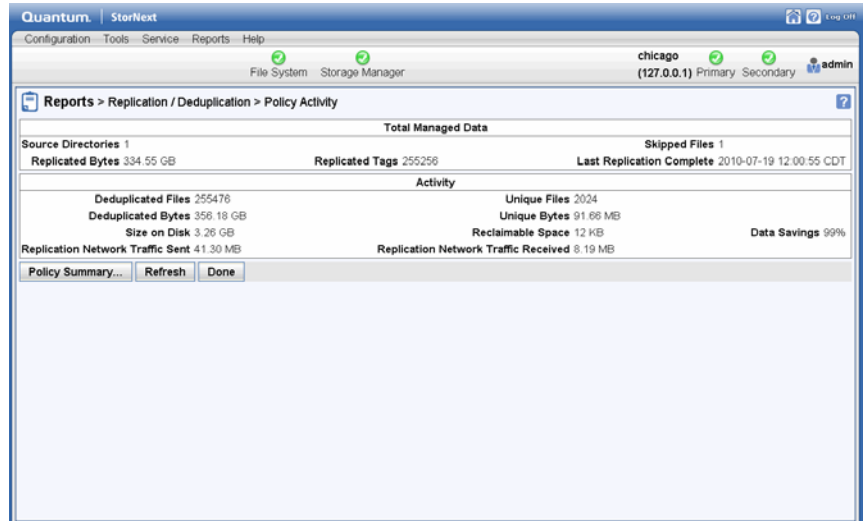

The Replication/ Deduplication Policy Activity Report provides the following information:

- **Total Managed Data**
 - **Source Directories:** The number of source directories from which StorNext checked for data to replicate.
 - **Replicated Bytes:** The number of bytes of data replicated.
 - **Replicated Tags:** The number of replication tags applied to files.
 - **Skipped Files:** The number of files not included in the replication process.
 - **Last Replication Complete:** The date and time the last replication was finished.
- **Deduplication Activity**
 - **Deduplicated Files:** The number of files deduplicated.
 - **Deduplicated Bytes:** The number of bytes of data deduplicated.
 - **Size on Disk:** The size (in bytes) of deduplicated data on disk.
 - **Network Sent:** The number of bytes of deduplicated data sent over the network.

- **Unique Files:** The number of unique files included in the deduplication process.
 - **Unique Bytes:** The number of unique bytes included in the deduplication process.
 - **Reclaimable Space:** The amount of reclaimable space realized by data deduplication.
 - **Network Received:** The number of bytes of deduplicated data received over the network.
 - **Data Savings:** The percentage of data savings realized by data deduplication.
- 2 If desired, click **Refresh** to manually update (refresh) the report data.
 - 3 To view a report showing replication policy summary information, click **Policy Summary**.

Policy Summary Report

Use the following procedure to run the Replication/ Deduplication Policy Summary Report.

- 1 Choose **Replication/ Deduplication > Policy Summary** from the **Reports** menu. The **Reports > Replication/ Deduplication > Policy Summary** report appears.

Figure 123 Replication/
Deduplication Policy Summary
Report

Running Policy	File System	Source Directory	Replicated				Replication			Replication Network Traffic	
			Directories	Files	Skipped	Bytes	Average Rate	Estimated Completion	Last Completed	Sent	Received
rep1	source	/stornext /source/rep1	256	255256		1 334.55 GB	N/A	N/A	2010-07-19 12:00:55 CDT	41.30 MB	8.19 MB

The Replication/ Deduplication Policy Summary Report provides the following information:

- **Policy:** The name of the replication storage policy.
- **File System:** The name of the file system for which replication is enabled.
- **Source Directory:** The name of the source directory from which information is replicated.
- **Replicated**
 - **Directories:** The number of replicated directories to date.
 - **Files:** The number of replicated files to date.
 - **Skipped:** The number of files skipped by the replication process.
 - **Bytes:** The total number of data bytes replicated to date.
- **Replication**
 - **Average Rate:** The approximate rate at which data was replicated from the source to the target.
 - **Estimated Completion:** The estimated time replication is currently scheduled to complete.
 - **Last Completed:** The date and time the last replication was finished.


- **Network**
 - **Sent:** The amount of replicated data sent from the source.
 - **Received:** The amount of replicated data received on the target.
- 2 To update report information, click **Refresh**.
 - 3 To view details for a particular policy, select the desired policy and then click **Details**.

Figure 124 Replication/
Deduplication Policy Details
Report



- 4 To view a report showing completed replication, click **Completion Report**.
- 5 When you are finished viewing this report, click **Done**.

Figure 125 Replication/
Deduplication Policy
Completion Report

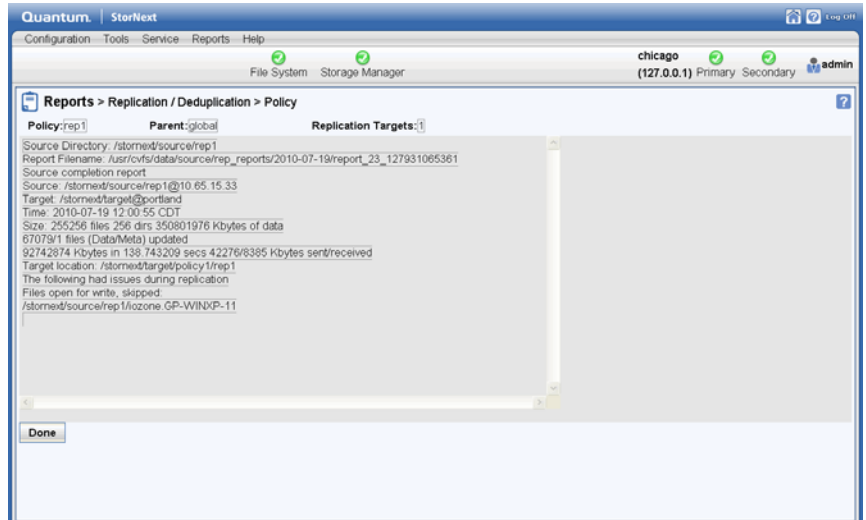

6 To view the Policy Activity report, click **Policy Activity**.



Chapter 11

Customer Assistance


More information about this product is available on the Quantum Service and Support website at www.quantum.com/ServiceandSupport. The Quantum Service and Support website contains a collection of information, including answers to frequently asked questions (FAQs). You can also access software, firmware, and drivers through this site.

Quantum Technical Assistance Center

For further assistance, or if training is desired, contact the Quantum Technical Assistance Center:

North America	1+800-284-5101 Option 5
EMEA	00800 999 3822
Online Service and Support	www.quantum.com/OSR
Worldwide Web	www.quantum.com/ServiceandSupport

(Local numbers for specific countries are listed on the Quantum Service and Support Website.)

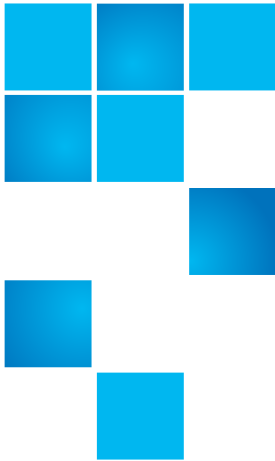

Appendix A

Operating Guidelines

This appendix contains information pertinent to operating StorNext, as well as some operating guidelines and limitations you should consider.

The Reserved Space Parameter

As of StorNext 3.0, the method of accounting for reserved space has changed. The `MaxMBPerClientReserve` parameter from the StorNext file system configuration file (`/usr/cvfs/config/*.cfg`) has been deprecated. All values except 0 are ignored for this parameter. In addition, there is a new parameter, `ReservedSpace`.

The `ReservedSpace` parameter lets the administrator control the use of delayed allocations on clients. `ReservedSpace` is a performance feature that lets clients perform buffered writes on a file without first obtaining real allocations from the metadata controller (MDC).

The `ReservedSpace` parameter can be set to `Yes` or `No`:

- `Yes` - (Default) The MDC reserves enough disk space so that delayed allocations can be converted to real allocations (even when the MDC is restarted and the client is not). The MDC reserves a minimum of about 4GB for each stripe group and up to 280MBs per actively writing client **for each stripe group**.

Note: The amount of reserved space is usually less than 280MB per client. Reserved space is calculated as 110% of the buffer cache size of each particular client. For example, a client with a 64MB buffer cache is allocated 70MBs of reserved space by the MDC. If the client closes all files that are open for write, the 70MBs of space is no longer accounted for. **It is important to remember that reserved space is per stripe group.**

- No - More disk space is available for use, but buffer cache performance is affected, and fragmentation may occur.

If the `MaxMBPerClientReserve` parameter exists in the configuration file and has a value of 0, `ReservedSpace` is set to No. Otherwise, `ReservedSpace` defaults to Yes.

Note: In prior releases of StorNext, `MaxMBPerClientReserve` defaulted to 100MBs, and reserved space was the product of `MaxMBPerClientReserve` multiplied by `MaxConnections - 1`. In StorNext 3.0, the MDC tracks the actual amount of reserved space that clients use but caps the value to about 280MBs per client.

In addition, the MDC maintains a “minimum level” of reserved space. As a result, in some cases, more reserved space may be visible. Reserved space appears as allocated disk space per data stripe group.

The minimum reserved space is enough to accommodate 15 clients or `MaxConnections - 1`, whichever is lower. For example, if a cluster has a `MaxConnections` of 3, the reserved space total can be under 1GB.

Linux Configuration File Format

Beginning with StorNext 4.0, the configuration file for Linux is now in XML format. The Linux configuration file is now identified by a `.cfgx` extension rather than `.cfg` for Windows systems.

There are some differences between the XML and `.cfg` formats. Specifically, the Reserved Space parameter is called `reservedSpace` in the XML format, and its value must be either true or false.

For additional information and examples of both configuration file formats, see the *StorNext Installation Guide*.

Distributed LAN Server/Client Network and Memory Tuning

Using the Distributed LAN Server and Client feature places significant additional demands on network capacity and system memory. Before creating and using a Distributed LAN Server and Client, review the following information:

- [Distributed LAN Server and Client Network Tuning](#)
- [Distributed LAN Server Memory Tuning](#)

Note: For additional information about Distributed LAN Client and server performance tuning, see the *StorNext File System Tuning Guide*.

Distributed LAN Server and Client Network Tuning

Due to significant demands placed on the network, the following network issues can occur when using Distributed LAN Servers and clients:

- **Configuring Dual NICs.** On Linux systems, multiple Ethernet interfaces may be configured as a single bond interface using the Linux bonding driver. The bond interface may be then be configured for use by the StorNext Distributed LAN server. In this case a Distributed LAN client may have only a single Ethernet interface. LAN clients running Linux may also be configured to use a bond interface. To take advantage of a second NIC in a Distributed LAN Server, the Distributed LAN Clients must also have a second connected network interface.
- **Dropped Packets.** Some Ethernet switches may be unable to accommodate the increased throughput demands required by the Distributed LAN Server and client feature, and will drop packets. This causes TCP retransmissions, resulting in a significant performance loss. On Linux, this can be observed as an increase in

the Segments Retransmitted count in `netstat -s` output during Distributed LAN Client write operations and Distributed LAN Server read operations.

To address this issue, edit the `/usr/cvfs/config/dpserver` configuration file and reduce the Distributed LAN Server TCP window size from the default value. (Remount the file system after making changes.) This may reduce the amount of packet loss. However, some Ethernet switches are unable to accommodate true GigE bandwidth, especially when multiple ports are transmitting data at the same time.

- **Linux Network Drivers.** For best performance and compatibility, update Intel e1000 drivers to the latest version.

In some cases, enabling TCP offload can cause issues. (Identify these issues by examining `netstat -s` output for bad segments.) If necessary, use `ethtool -K` to disable the offload of checksum calculations.

On some Linux 2.6 versions running on x86 64-bit systems, a console message regarding `noirq` handler may appear followed by a hard system hang. This is due to a bug in the kernel. To avoid this error, disable the `irqbalance` service.

- **Mismatched Server Configuration.** Introducing a slower server onto the network reduces overall throughput. This is because the slower server receives some traffic from all clients. For example, adding a server with one NIC in a network where other servers have two NICs, or adding a server with less disk bandwidth or a bad network connection, reduces throughput for the entire network.

Note: On Linux, use `ping` and the `cvadmin` latency test tools to identify network connectivity or reliability problems. In addition, use the `netperf` tool to identify bandwidth limitations or problems.

On Windows, use the **Networking** tab of **Windows Task Manager** to view network utilization.

Distributed LAN Server Memory Tuning

The minimum amount of memory required for a Distributed LAN Server depends on the configuration.

- **Windows.** For a Windows Distributed LAN Server, use the following formula:

Required memory = 1GB +

(# of file systems served

* # of NICs per Distributed LAN Client

* # of Distributed LAN Clients

* transfer buffer count

* transfer buffer size)

For example, suppose a Windows Distributed LAN Server is serving four file systems to 64 clients each using two NICs for data traffic. Also assume the server uses the defaults of sixteen transfer buffers and 256K per buffer. (On Windows, you can view and adjust the transfer buffer settings using the Client Configuration tool's Distributed LAN tab.) Given this configuration, here is the result:

Required memory = 1GB + (4 * 2 * 64 * 16 * 256K) = 3GB

Note: This example assumes that a 64-bit version of Windows is being used on the Server. 32-bit Windows Distributed LAN Servers are restricted to small configurations using 16 or fewer connections.

If not all clients mount all of the file systems, the memory requirement is reduced accordingly. For example, suppose in the previous example that half of the 64 LAN clients mount three of the four file systems, and the other half of the LAN clients mount the remaining file system. Given this configuration, here is the result:

Required memory = 1GB + (3 * 2 * 32 * 16 * 256K) + (1 * 2 * 32 * 16 * 256K) = 1GB + 768MB + 256MB = 2GB

The calculation also changes when the number of NICs used for data traffic varies across clients. For example, in the previous example if the clients that mount only one file system each use three NICs for data instead of two, here is the result:

Required memory = 1GB + (3 * 2 * 32 * 16 * 256K) + (1 * 3 * 32 * 16 * 256K) = 1GB + 768MB + 384K = 2176MB

- **Linux.** For a Linux Distributed LAN Server, use the following formula:

Required memory = 1GB +

(# of file systems served

* # of NICs on the Distributed LAN Server used for
Distributed LAN traffic

* server buffer count

* transfer buffer size)

For example, consider a Linux Distributed LAN Server that has two NICs used for Distributed LAN traffic, serves four file systems, and uses the default eight server buffers and 256K per buffer. (See the `dpserver` and `sndpscfg man` pages for information about viewing and modifying Distributed LAN buffer settings on Linux.) For this case:

Required memory = 1GB + (4 * 2 * 8 * 256K) = 1040MB

Note: This example results in a memory requirement of less than 2GB. However, Quantum recommends that all Distributed LAN Servers contain a minimum of 2GB of RAM.

Configuring LDAP

This sections describes how to configure the StorNext LDAP functionality and describes related features in the Windows configuration utilities.

Using LDAP

StorNext 2.7 introduced support for Light Directory Access Protocol, or LDAP (RFC 2307). This feature allows customers to use Active Directory/ LDAP for mapping Windows User IDs (SIDs) to UNIX User ID/Group IDs.

Changes to “Nobody” mapping

If a Windows user cannot be mapped to a UNIX ID, the user is mapped to Nobody. StorNext allows administrators to change the value of Nobody by using the file system configuration parameters:

UnixNobodyUidOnWindows 60001

UnixNobodyGidOnWindows 60001

These parameters are located in the file system configuration file on the server and can be manually modified by the Windows or StorNext Web GUI.

Note: Compatible Active Directory servers include Windows 2003 Server SP1 (with the Windows Services for Unix 3.5 extended LDAP schema applied,) and Windows 2003 Server R2.

Note: Compatible Active Directory servers include Windows 2003 Server SP1 (with the Windows Services for Unix 3.5 extended LDAP schema applied,) and Windows 2003 Server R2.

UNIX File and Directory Modes

When a file or directory is created on Windows, the UNIX modes are controlled by the following file system configuration parameters:

UnixDirectoryCreationModeOnWindowsDefault 0755

UnixFileCreationModeOnWindowsDefault 0644

StorNext allows one set of values for all users of each file system.

Note: Administrators can manually change these values in the file system configuration file on the server or use the Windows or Web GUI.

LDAP Refresh Timeout

Due to the implementation of the Windows Active Directory user mappings, services for UNIX can take up to 10 minutes to be propagated to StorNext clients.

Setting Up Restrictive ACLs

When setting up restrictive ACLs on a SNFS file system, it is important to understand how SNFS system services are run, especially the account under which the services are run. The Windows default account is the local administrator account, but this can be changed on the Properties tab of each system service.

When sharing restricted file systems, the account under which SNFS system services are run must be included in the ACL for the root of the file system and all other shares associated with the SNFS file system. Doing this allows the shares to be re-shared upon reboot.

Default Single-Path I/O Retry Behavior

The I/O retry behavior has changed as of StorNext 3.1.2. In prior releases, when only a single path to the storage existed and an I/O error was returned by the disk device driver, StorNext failed the I/O operation. Beginning with version 3.1.2, by default StorNext continuously retries I/O operations until they succeed, regardless of the number of I/O paths. If desired, you can override this new behavior by using the new I/O Retry Time feature. For additional information about I/O Retry Time, consult the `mount_cvfs` man page or the Windows help file.

Event Handles for fsm.exe on a Windows Metadata Server

The metadata server (FSM) has many data structures that are used internally. Each of the data structures has some locks (`pthread_mutex_lock`). Each lock is initialized as “uninitialized.”

The first time the lock is used, a small amount of memory and an event (i.e., handle) are allocated. The memory and event/handle are retained

by the system until the data structure is destroyed. Some locks that are part of structures are seldom used, and exist for rare conditions. If the lock is not used, the memory/event for that structure will never be allocated.

Some data structures are not destroyed during the life of the FSM. These include in-memory inodes and buffers and others.

When the system starts, handle use is minimal. After the FSM has been up for a while, the handle count increases as the inode and buffer cache are used. After a while, the system stabilizes at some number of handles. This occurs after all inodes and buffers have been used.

The maximum number of used handles can be reduced by shrinking the inode and/or buffer cache. However, changing these variables could significantly reduce system performance.

FSBlockSize, Metadata Disk Size, and JournalSize Settings

The `FSBlockSize` (FSB), metadata disk size, and `JournalSize` settings all work together. For example, the `FSBlockSize` must be set correctly in order for the metadata sizing to be correct. `JournalSize` is also dependent on the `FSBlockSize`.

Note: In the Windows XML format configuration file, the FS block size parameter is called `fsBlockSize`. Regardless of the difference in parameter names (`fsBlockSize` and `FSBlockSize`) used in the Windows and UNIX configuration files, the requirements are identical for Windows and UNIX systems.

For `FSBlockSize` the optimal settings for both performance and space utilization are in the range of 16K or 64K.

Settings greater than 64K are not recommended because performance will be adversely impacted due to inefficient metadata I/O operations. Values less than 16K are not recommended in most scenarios because startup and failover time may be adversely impacted. Setting

JournalSize Setting

The optimal settings for `JournalSize` are in the range between 16M and 64M, depending on the `FsBlockSize`. Avoid values greater than 64M due to potentially severe impacts on startup and failover times. Values at the higher end of the 16M-64M range may improve performance of metadata operations in some cases, although at the cost of slower startup and failover time. New file systems must have a journal size of at least 1024 times the `fsBlockSize`.

Note: In the Windows XML format configuration file, the journal size parameter is called `journalSize`. Regardless of the difference in parameter names (`journalSize` and `JournalSize`) used in the Windows and UNIX configuration files, the requirements are identical for Windows and UNIX systems.

The following table shows recommended settings. Choose the setting that corresponds to your configuration.

<code>FsBlockSize</code>	<code>JournalSize</code>
16KB	16MB
64KB	64MB

This setting is adjustable using the `cvupdatefs` utility. For more information, see the `cvupdatefs` man page.

Example: `JournalSize 16M`

Disk Naming Requirements

When naming disks, names should be unique across all SANs. If a client connects to more than one SAN, a conflict will arise if the client sees two disks with the same name.

Changing StorNext's Default Session Timeout Interval

By default, StorNext automatically logs out the current user after thirty minutes of inactivity. Follow the procedure below to change the timeout interval. (All steps must be performed from the command line.)

- 1 Stop StorNext by entering the following:

```
service stornext_web stop
```

- 2 Edit the config file `/usr/adic/tomcat/webapps/ROOT/WEB-INF/web.xml` by entering the following:

```
<!-- Set session timeout to 30 minutes -->  
<session-config>  
    <session-timeout>30</session-timeout>  
</session-config>
```

- 3 Restart the StorNext GUI by entering the following:

```
service stornext_web start
```

For HA, these steps must be performed on both servers.

Caution: These changes alter the StorNext configuration file, so you should exercise caution. If you have any doubts about your ability to manually change the configuration file as described, do not attempt this procedure unless you have assistance from Quantum Technical Support.

General Operating Guidelines and Limitations

[Table 1](#) lists updated information and guidelines for running StorNext, as well as known limitations.

Table 1 Operating Guidelines and Limitations

Operating System	Feature or Category	Description
AIX	Clients	<p>Clients on AIX systems may not unmount a file system after running the <code>fsstress</code> command against that file system. The client must then be rebooted to release the mount.</p> <p>This issue occurs on AIX systems when the <code>fsstress</code> command is run using <code>mknod</code> on the same command line. To prevent encountering this behavior, do not include <code>mknod</code> when running <code>fsstress</code>. Otherwise, you will be required to reboot the client without a successful unmount.</p>
Mac OS	The Mac OS Trashcan	<p>StorNext users with Mac OS X clients can't create files in a directory which has a replication policy with some applications such as TextEdit, and they cannot move files inside of that replication policy to the trashcan.</p> <p>The trashcan works for a single file but not for folders. Thus, a <i>file</i> managed by replication/deduplication can be moved to the trashcan, just like a file managed by Storage Manager can be moved to the trash. However, a <i>folder</i> managed by replication/deduplication cannot be moved to the trashcan, just like a folder managed by Storage Manager cannot be moved to the trash.</p> <p>Apple does not provide a way to disable the Trashcan the way Microsoft does for Windows.</p> <p>For users of applications such as TextEdit who are trying to do a "safe save" and move the old file out of the way during that process, the workaround is to save the file somewhere else and then move it under the replication point.</p>

Operating System	Feature or Category	Description
Solaris	StorNext labels	<p>Solaris hosts may need to rescan disk devices after StorNext labels have been applied.</p> <p>In particular, when a StorNext label is put on a LUN less than 1TB in size, Solaris hosts will not be able to use that LUN until they have done a device rescan. A device rescan is accomplished with a boot flag:</p> <pre>reboot -- -r</pre> <p>This issue will be addressed in a future StorNext release.</p> <p>In the meantime, work around this issue by rescanning devices using the boot flag <code>reboot -- -r</code></p> <p>If the labeling operation was performed on a Solaris host, that host does not need to do the rescan. However, some intermediate versions of the Solaris 10 Kernel Jumbo Patch break the necessary functionality to support this; please be sure you have applied the latest Solaris 10 Kernel Jumbo Patch before labeling any StorNext LUNs.</p>
Linux	StorNext File System	<p>StorNext File System does not support the Linux <code>sendfile()</code> system call.</p> <p>This issue causes Apache web servers to deliver blank pages when content resides on StorNext file systems. This issue also affects Samba servers running on Linux.</p> <p>The workaround is to disable <code>sendfile</code> usage by adding the following entry into the Apache configuration file <code>httpd.conf</code>:</p> <pre>EnableSendfile off</pre> <p>The workaround for Samba servers is to add the following line into the configuration file:</p> <pre>sendfile=no</pre>


Operating System	Feature or Category	Description
Linux	HA	<p>Changing the haFsType parameter in a file system configuration file to one of the HA types, and then (re)starting its FSM enables HA-specific features that change the functionality of StorNext.</p> <p>When the HaShared or HaManaged types are configured, other changes must be completed by successfully running the <code>cnvt2ha.sh</code> script, which is indicated by the creation of the <code>/usr/adic/install/.snsm_ha_configured</code> touch file (<code>\$SNSM_HA_CONFIGURED</code> environment variable). No conversion is done or necessary for SNFS only (HaUnmanaged) configurations.</p> <p>If the conversion is not successfully completed, the HaManaged FSMs will not start, and the HaShared FSM will cause an HA Reset when it is stopped.</p> <p>To remedy this situation, edit every FSM configuration file to set its haFsType parameter to HaUnmonitored, then run the following commands to avoid the HA Reset in this special case only:</p> <pre>touch /usr/cvfs/install/.vip_down_hint service cvfs stop</pre>
	System logs	<p>Due to the way Linux handles errors, the appearance of SCSI "No Sense" messages in system logs can indicate possible data corruption on disk devices.</p> <p>This affects StorNext users on Red Hat 4, Red Hat 5, SuSe 9, and SuSe 10.</p> <p>This issue is not caused by StorNext, and is described in detail in StorNext Product Alert 20.</p> <p>For additional information, see Red Hat 5 CR 468088 and SuSE 10 CR 10440734121.</p>

Operating System	Feature or Category	Description
Linux	Migrating metadata controllers	<p>StorNext users migrating their metadata controllers from Apple Xsan to Linux should be aware of the following upgrade considerations:</p> <ul style="list-style-type: none"> • If the file system is running Xsan 2.1.1 or earlier, it should be a simple upgrade: just replace the MDC. • If the file system is running Xsan 2.2 or later with "NamedStreams No" (which is the default for Xsan 2.2,) it should also be a simple upgrade: just replace the MDC. • If the file system is running Xsan 2.2 or later with "NamedStreams Yes," you must completely remake (reformat) the file system. For obvious reasons, you should do a complete backup before migrating.
	FQDN	<p>SuSe Linux distributions automatically associate the FQDN of the local machine with the address 127.0.0.2 in the /etc/hosts file. There is no benefit from doing this when the machine is connected to a network that can resolve its name to an IP address.</p> <p>However, the existence of this entry can sometimes cause a failure of configuration synchronization within and between the server computers in an HA configuration. For this reason, the 127.0.0.2 entry should be deleted from the /etc/hosts file.</p>
Windows	df command	<p>Running the command df shows mapped drives but not the mapped folders and directories for cvfs and ntfs file systems.</p> <p>The workaround is to use the command mountvol, which shows the directories and folders in the file system that are mount points.</p>
	Window backup utility	<p>When a StorNext file system is mounted to a drive letter or a directory, configure the Windows backup utility to NOT include the StorNext file system.</p>

Operating System	Feature or Category	Description
Windows	Promise RAID controllers	<p>If you are using Promise RAID controllers on a Windows Server 2008 64-bit system, you must install Promise's PerfectPath software.</p> <p>If you do not install this software, you will be unable to use your Windows Server 2008 system.</p> <p>Promise is working on a solution to this problem, but in the meantime they have provided the following workaround:</p> <ol style="list-style-type: none"> 1. Install the PerfectPath software on your Windows Server 2008 64-bit system. 2. Restart your system. The login prompt will <i>not</i> appear after you restart. Instead, the Windows Boot Manager screen appears showing an error message: "Windows cannot verify the digital signature for this file" (\Windows\system32\DRIVERS\perfectpathdsm.sys) 3. From the Windows Boot Manager screen, press Enter to continue. A second Windows Boot Manager screen appears, asking you to choose an operating system or specify an advanced option. 4. On the second Windows Boot Manager screen, press F8 to specify advanced options. The Advanced Boot Options screen appears. 5. On the Advanced Boot Options screen, use the arrow keys to choose the option Disable Driver Signature Enforcement. Choosing this option will cause the system to display the login prompt normally after you reboot. 6. Restart your system.

Operating System	Feature or Category	Description
Windows	Upgrades on Windows Vista	<p>StorNext upgrades on Vista machines can fail in the middle of installation. This problem is caused by the way Windows Vista handles software upgrades. A related error is described in Microsoft article 263253. Microsoft has a utility called the Windows Installer Cleanup Utility that removes files left behind by incomplete installations. Access the Microsoft website and search for article ID 290301.</p> <p>To work around this issue, follow these steps:</p> <ol style="list-style-type: none"> 1. Click Start, and then click Run. 2. In the Open box, type Regedit and then click OK. 3. On the Edit menu, click Find. 4. In the Find what box, type Snfs_XXX.dat and then click Find Next. 5. If the search result selects a string value called PackageName, continue with these steps. Otherwise, repeat steps 3-4. 6. Double-click the PackageName string value. 7. In the Value data box, change the installation directory path to the new pathname. For example if the old installation directory path contained OCT10, change that to the current path (e.g, NOV12.) 8. On the Registry menu, click Exit.

Operating System	Feature or Category	Description
Windows	Recycle bin	<p>If you are using the StorNext client software with Windows Server 2003, Windows Server 2008, Windows XP, Windows Vista or Windows 7, turn off the Recycle Bin in the StorNext file systems mapped on the Windows machine.</p> <p>You must disable the Recycle Bin for the drive on which a StorNext file system is mounted. Also, each occurrence of file system remapping (unmounting/mounting) will require disabling the Recycle Bin. For example, if you mount a file system on E: (and disable the Recycle Bin for that drive) and then remap the file system to F:, you must then disable the Recycle Bin on the F: drive.</p> <p>As of release 3.5, StorNext supports mounting file systems to a directory. For Windows Server 2003 and Windows XP you must disable the Recycle Bin for the root drive letter of the directory-mounted file system. (For example: For C:\MOUNT\File_System you would disable the Recycle Bin for the C: drive.)</p> <p>For Windows Server 2003 or Windows XP:</p> <ol style="list-style-type: none"> 1 On the Windows client machine, right-click the Recycle Bin icon on the desktop and then click Properties. 2 Click Global. 3 Click Configure drives independently. 4 Click the Local Disk tab that corresponds to the mapped or directory-mounted file system. 5 Click the checkbox Do not move files to the Recycle Bin. Remove files immediately when deleted. 6 Click Apply, and then click OK.

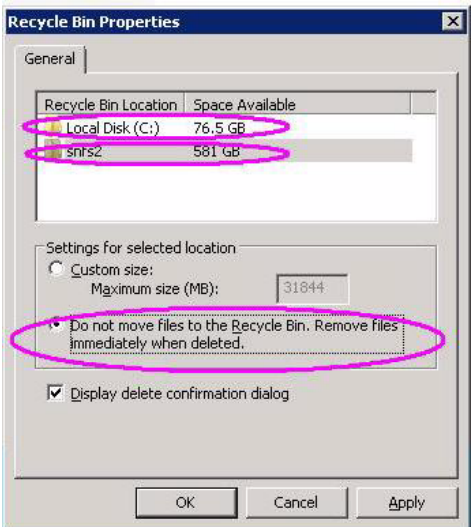Operating System	Feature or Category	Description
Windows	Recycle bin (cont.)	<p>(Disabling the Recycle Bin, Continued)</p> <p>For Windows Server 2008, Windows Vista and Windows 7 systems, you must disable the Recycle Bin on C: and the File system name:</p> <ol style="list-style-type: none"> 1 On the Windows client machine, right-click the Recycle Bin icon on the desktop and then click Properties. 2 Click the General tab. 3 Select the mapped drive that corresponds to the StorNext mapped file system. For directory-mounted file systems, select the file system from the list. 4 Choose the option Do not move files to the Recycle Bin. Remove files immediately when deleted. 5 Click Apply. 6 Repeat steps 3-5 for each remaining directory-mounted file system. 7 When finished, click OK. 

Operating System	Feature or Category	Description
All	File systems and stripe groups	Be aware of the following limitations regarding file systems and stripe groups: <ul style="list-style-type: none"> • The maximum number of disks per file system is 512 • The maximum number of disks per data stripe group is 128 • The maximum number of stripe groups per file system is 256 • The maximum number of tape drives is 256
	Managed file systems	For managed file systems only, the maximum recommended directory capacity is 50,000 files per single directory. (This recommendation does not apply to unmanaged file systems.)
	Subtree Check option	Subtree Check Option in NFS No Longer Supported Although supported in previous StorNext releases, the <code>subtree_check</code> option (which controls NFS checks on a file handle being within an exported subdirectory of a file system) is no longer supported as of StorNext 4.0.
	Upgrade	Before attempting to upgrade from a previous StorNext release, make sure you have free space on the file system. If the file system is nearly full when you begin the upgrade, serious errors may occur or the upgrade could fail. Best practice is to maintain an area on the file system which is not used for data or system files, but is reserved as an empty buffer to ensure that upgrades and other operations complete successfully.
	StorNext home page	The capacity indicators on the StorNext home page provide <i>approximations</i> and may not accurately summarize the actual current capacity. If you require accurate, up-to-the-minute capacity information, click the Capacity areas of the home page to view current capacity. A future StorNext release may include capacity indicators that summarize actual current capacity.

Operating System	Feature or Category	Description
All	Backups	Quantum recommends making two or more backup copies to minimize vulnerability to data loss in the event of hardware failure.
	Tape drives	StorNext does not support hot-swapping tape drives. When replacing or adding new tape drives you must first stop StorNext before installing the new drive.
	Cluster-Wide Central Control	<p>The StorNext Cluster-Wide Central Control file (<code>nss_cctl.xml</code>) is used to enforce the cluster-wide security control on StorNext nodes (client nodes, fsm nodes, and nodes running <code>cvadmin</code>). This file is placed on an nss coordinator server.</p> <p>Currently the nss coordinator server capable of parsing this xml file must be on the Linux platform.</p>
	Labels	<p>Disks with existing non-StorNext labels may not show up in the StorNext GUI in order to protect non-StorNext disks from being accidentally overwritten. If you need to label a disk that is not visible in the StorNext GUI, use the <code>cvlabel</code> command to label the disk or use <code>cvlabel -U</code> to remove the existing label from the disks. (Refer to the <code>cvlabel</code> man pages for instructions on labeling and unlabeled drives.)</p> <p>Caution: Modifying the label on an active non-StorNext disk can make the disk unusable. Proceed with caution.</p>
	Xsan	It is not possible to delete data within a StorNext policy relation point from an Xsan client via the Finder. Rather, data must be deleted using the shell.
	Replication/ Deduplication	If you are using the Deduplication or Replication feature, part of the installation process is to update the on-disk index. The time required to complete this part of the installation process times may vary depending on the size of your licensed blockpool, drive performance, and other factors. As a general guideline, allow approximately five minutes for a 10TB blockpool.

Operating System	Feature or Category	Description
All	Replication	<p>When creating or editing a replication storage policy, there is a field on the Outbound Replication tab called "Filenames Excluded from Replication." This field allows you to exclude specific files from the replication process.</p> <p>This field works the same way as a UNIX shell which lets you pattern match names. For example, entering <code>*.o</code> core would exclude all .o files and also files named "core." You could also skip all core files by entering <code>rep_skip=core*</code>.</p>
	Deduplication	<p>If a deduplication candidate is removed before blockpool processing is completed, errors such as the following may be sent to the syslog:</p> <pre>Oct 2 15:22:00 orleans Blockpool[16403]: E: [5] (Store Local) Error storing file "/stornext/ source/ __CVFS_Handle.000474F892EBB65E000E000000000000000 000000292BF4". Error opening file "/stornext/source/ __CVFS_Handle.000474F892EBB65E000E000000000000000 000000292BF4". No such file or directory.</pre> <p>Errors such as these may appear serious, but there is no reason for concern.</p> <p>If you receive these errors, no action is required.</p>
	HA	<p>When exiting HA Config mode, StorNext will be stopped, which will also 'fuser' any processes which have files open on the file system from either node.</p> <p>Prepare systems and users for this eventuality before entering HA Config mode.</p>

Operating System	Feature or Category	Description
All	HA	<p>On HA systems only:</p> <p>The <code>/usr/cvfs/config/ha_peer</code> file supports some essential HA features by providing an address for HA administrative communications between the MDCs in an HA Cluster. If CVFS is started without this file having correct information, the probability of an HA Reset increases. To correct this condition, restore the <code>ha_peer</code> file to the IP address of the peer MDC, and restart StorNext by running the following command:</p> <pre>service cvfs restart</pre> <p>Note: The peer will be Primary after running this command.</p> <p>If the <code>ha_peer</code> file is removed for any length of time while StorNext is running, the <code>snhamgr(1)</code> HA Manager subsystem could stop functioning, which impacts the GUI HA Manage status page and the starting and stopping of CVFS, as well as any command line use of <code>snhamgr</code> itself. If this occurs, restore the <code>ha_peer</code> file to the IP address of the peer MDC, and then restart the HA Manager service by running the following command: <code>service snhamgr restart</code></p>
	HA	<p>On HA systems only:</p> <p>When a non-managed file system is converted to a managed file system in an HA pair, it is possible for the secondary node to not update the HA state of this FSM. Quantum recommends that the secondary MDC be rebooted after converting any non-managed file systems to managed file systems.</p>

Operating System	Feature or Category	Description
All	HA	<p>On HA systems only:</p> <p>You may receive the following incorrect error message when scanning for a secondary MDC from the StorNext Convert to HA page:</p> <pre>WARN com.quantum.qutosgui.jsf.ha.HaMBean - doScanHost: Secondary system cannot be same as the primary system.</pre> <p>This message is generated if <code>/usr/adic/util/cnvt2ha.sh</code> fails for any reason (for example, if the file system exists on the secondary, if a shared file system can't mount, etc). Upon secondary conversion failures, StorNext resets the <code>ha_peer</code> file to <code>255.255.255.255</code> on the secondary. Since the conversion fails, the primary <code>ha_peer</code> file is not updated and faulty comparison logic causes the erroneous error message (<code>255.255.255.255 == 255.255.255.255</code>).</p> <p>The workaround consists of two steps:</p> <ol style="list-style-type: none"> 1 Remove the <code>/usr/cvfs/config/ha_peer</code> file from the secondary system. 2 Reset the StorNext processes on the secondary system by running <code>/etc/init.d/stornext_web restart</code>.

Operating System	Feature or Category	Description
All	HA	<p>Understanding the performance of FSM failover in StorNext High Availability installations:</p> <p>When a failover of any file system occurs, the new FSM notices if any clients had a file exclusively opened for writes, and waits up to 35 seconds for those clients to reconnect. In the case of an HA Reset of the Primary MDC, that MDC is not going to reconnect, so the failover to FSMs on the Secondary MDC and the promotion of that MDC to Primary status can be delayed by 35 seconds.</p> <p>The StorNext system exclusively opens files on the HaShared file system, but assumes that only the Primary MDC does this and waives the delay for that one file system. Quantum advises against running user processes other than StorNext processes on HA MDCs for performance, reliability and availability reasons. In the event that processes running on the Primary MDC have files exclusively open for writes on other file systems, the availability of those file systems to all clients will be delayed by 35 seconds following an HA Reset event.</p>
	Quotas	<p>When you enable or disable quotas using the CLI <code>cvadmin</code> command, the change does not persist after rebooting. In order to permanently enable or disable quotas, you must modify the Quotas parameter of the file system config file.</p>
	Stripe group expansion	<p>StorNext does not support expansion on stripe groups containing mixed-sized LUNs. For example, if you create a file system that has two different-sized disks in a userdata only stripe group and then attempt to add a new disk to that stripe group and expand it, the expansion will fail.</p>

Operating System	Feature or Category	Description
All	Distributed LAN	<p>Distributed LAN Clients in HA Environments:</p> <p>Each HA node must have its own dpserver files detailing the NICs on that node. The dpserver files are not synchronized between HA pairs. If the Distributed LAN Server is configured after converting to HA, the file system(s) running as Distributed LAN servers must be unmounted and mounted again to service DLC requests.</p> <p>When deduplication/replication is enabled, one or more Virtual IP Addresses (VIPs) provides access to the Primary MDC (where the blockpool server is running). In StorNext startup and failover situations, the VIP is dynamically associated with a physical address on the Primary server. Do not use VIP interfaces when setting up the dpserver configuration file, or it will not be available when the node is running as Secondary. The physical interface and IP address should be used in this situation.</p>
	dpserver	<p>In some cases the physical IP address must be included in the dpserver file in addition to the interface name. Note these conditions:</p> <ul style="list-style-type: none"> • When there is one IP address associated with a NIC interface, the interface name alone is a sufficient identifier • If there are multiple IP addresses associated with a NIC interface, one IP address is required in addition to the interface name • On HA systems, the physical IP address is required if virtual IP is configured for the NIC interface. (See also the following entry, "Distributed LAN Clients in HA Environment.")

Appendix A: Operating Guidelines
General Operating Guidelines and Limitations



Appendix B

Additional Replication and Deduplication Information

This appendix contains detailed information about how replication and deduplication work, and about the underlying processes.

Replication Configuration File

StorNext includes a configuration file called `snpolicyd.conf` located at `/usr/cvfs/config/snpolicyd.conf`.

The `snpolicyd.conf` file provides a way to configure the `snpolicyd` process, which handles most aspects of StorNext replication and deduplication.

The man page for `snpolicyd.conf` contains detailed syntax, examples and instructions for modifying this file.

The remaining sections in this appendix also make reference to this file.

Replication Terminology and Conventions

StorNext has two kinds of policy:

- Storage Manager (SM) policies
- Replication/Deduplication policies.

For the sake of simplicity, in this appendix Replication/Deduplication policies will be called "snpolicyd" policies. Snpolicyd is the name of the Linux daemon that interprets and acts upon the policies.

StorNext users often talk about Storage Manager storing files to tape or retrieving files from tape, but Storage Manager can also use storage disk (called SDISK in SM) for storing files. In this appendix when we mention writing to or reading from tape, it includes using SDISK.

Copies and Versions

It's important to understand what "copies of a file or directory" means. There are several meanings, and this section attempts to clarify where StorNext supports additional copies and versions of a file or directory.

Context 1: "Number of copies to keep on target" is one property of an snpolicyd policy. This parameter specifies the number of replicated directories to keep on the target file system for a source directory. Remember, the replication process involves replicating a source directory and all of files and subdirectories that it contains. You can create from 1 to 16 target directories, depending on the "Number of copies to keep on target". Number of copies in this context means the number of target directory instances. By default, the different directories are differentiated by names like `dir`, `dir.1`, `dir.2`, and so on.

Context 2: Number of target files systems for an snpolicyd replication source policy. When configuring replication, you can specify up to three target file systems. For example, you could specify file system `/stornext/bk` on machine `hist1`, and file systems `/snfs/backup` and `/snfs/dr` on machine `host2`. Each of these directories can be a target of a replication source directory. The replication process is not complete

until each of the three target file system targets have been completely made.

If a replication source policy specified 10 for the "Number of copies to keep on target" and specified 3 target file systems, you would eventually have 30 replication directories: 3 after the first replication, 6 after the second replication, etc.

Context 3: Storage Manager number of copies. Storage Manager stores 1 through 4 copies of a file. The number of files is configured under the Steering tab when editing or creating a Storage Manager storage policy. (Actually, 4 is the default maximum number of copies. The number can be larger than 4.) Each of these copies is a copy of the same file contents.

Context 4: Storage Manager version. Versions refer to changed contents of the same file. By default, Storage Manager keeps ten versions of a file. Unlike Storage Manager copies, Storage Manager versions refers to different file contents. If there is a file called "log" that changes every day, and Storage Manager stores "log" every day, after ten days there would be ten versions of "log". The `fsversion` command is used to examine and change the Storage Manager versions of a file.

Context 5: Storage Manager File Recovery. When a file is removed from a Storage Manager relation point, the previous copies stored by Storage Manager are still on media and in the SM database. These previous versions may be recovered using the `fsrecover` command. There is no a limit to the number of SM instances which can be recovered in this manner. Eventually the administrator may use the `fsclean` command to clean up older versions of SM media. After running `fsclean`, files that used to reside on the media can no longer be recovered with the `fsrecover` command.

Replication Target Directories

Replication results in a directory on the target that represents the files that were in the source directory at the time of the replication. The source and target directories could be on the same machine (node) or different machines. Also, StorNext can replicate either deduplicated data or non-deduplicated data.

Number of Replication Copies

When a source directory is replicated to a target there can be from 1 through 16 replicated target directories that reflect replications of the source at different times. The number of copies is specified by the "Copies to Keep on Target" parameter on the Inbound Replication tab or Outbound Replication tab. You enter parameters on these tabs when configuring a snpolicyd storage policy.

The "Copies to Keep on Target" selection allows values of 1 through 16, and also a special case called in-place. We will not discuss the in-place selection in this section.

First, let's consider the case where "Copies to Keep on Target" is 2. Each time a replication occurs a new target directory is created. This target directory might have the same name as the previous target directory, but it is actually a new directory. The new directory reflects files added, deleted, and changed since the previous replication.

It is important to understand that in this example the target is a *new* directory. This has implications that might not be immediately obvious. For one thing, it means we cannot use the target directory in exactly the same way as we might use the source directory. Following is an explanation and examples.

Example: Copies on Target = 2

In this example, we replicate source directory `/stornext/snfs1/photos`, a directory in file system `/stornext/snfs1`, to a target directory `/stornext/backup/photos` in file system `/stornext/backup`. (For this example it doesn't matter whether the two file systems are on the same node machine or on different machines.) Since we are keeping two copies on the target, we will usually have two directories on the target:

- `/stornext/backup/photos` - *most recent replication*
- `/stornext/backup/photos.1` - *previous replication*

When the next replication occurs, the following directory changes Take place:

- The previous replication `/stornext/backup/photos.1` is removed
- The most recent replication `/stornext/backup/photos` is renamed `/stornext/backup/photos.1`
- The new replication appears in `/stornext/backup/photos`

Now consider a Linux shell process that is executing inside directory `/stornext/backup/photos`. When the next replication occurs, the directory still exists but is named `/stornext/backup/photos.1`. If the Linux shell executes the command `ls -l`, the `ls` command lists the *previous* contents of `photos` - the directory now named `photos.1`.

When the replication after that occurs, the original directory is removed. When the shell executes `ls -l`, the command shows no files since the original directory and its contents have been removed.

Thus, a process executing inside a replication directory may see files in the directory at one time and see no files a while later. This is different behavior than we would expect to see when a process is executing inside the original source directory.

Similar surprising behavior occurs if the replicated directory is NFS exported or Samba/CIFS shared. Suppose directory `/stornext/backup/photos` is NFS exported on the target machine. The directory can be NFS mounted on another Linux or Unix machine. The mounted NFS file system can generate errors (input/output error, stale NFS file handle) on the client when the original directory changes due to replication.

The bottom line is that you must be aware that changes occur with the replicated directory. The replicated directory should not be used as a substitute for the original source directory unless you take precautions to isolate the application from unexpected changes.

Isolating a Replication Target Directory

To isolate a replication target directory, use the `snpolicy` command's `-exportrepcopy` option. This operation is available only from the command line, not from the StorNext GUI.

First, use the `-listrepcopies` option on the target node to determine the association between the target copy number and the target directory to use. The `-listrepcopies` output provides the "key" value for the policy used to implement this replication. For example, if the target file system is `/snfs/rep`, use the command:

```
/usr/cvfs/bin/snpolicy -listrepcopies=/snfs/rep
```

Here is the relevant part of the command output:

```
source://snfs/sn1@10.65.170.108:/project?key=402 ->  
target://snfs/rep@node2:?key=406
```

```
0 -> /snfs/rep/project
1 -> /snfs/rep/project.1
2 -> /snfs/rep/project.2
3 -> /snfs/rep/project.3
```

The copy number appears in the left column, and the realization directory for that copy number is shown after the "->".

There are two "keys" shown in the sample output. The first key (402) is the key value for the source policy controlling the replication. The second key value (406) controls the replication realization of the target.

Let's say you want to copy files back from `/snfs/rep/project.2`. To isolate `/snfs/rep/project.2` you would use this command:

```
/usr/cvfs/bin/snppolicy -exportrepcopy=/snfs/rep/ --
key=406 -copy=2 --path /snfs/rep/project_temp
```

This command renames the directory `/snfs/rep/project.2` to `/snfs/rep/project_temp` and prevents the policy daemon from affecting this directory, in case replications for this target policy become activated again during the recovery process.

The `-path` argument is optional: you can do only the `exportrepcopy` operation and use the directory name `/snfs/rep/project.2` when recovering replicated files.

The point of this is that using the `-exportrepcopy` option allows you to use the directory without having to worry about it changing, or files disappearing as you do your work.

Once a directory has been isolated in this manner, it can then be transformed into a replication source directory for rereplication to another file system and/or machine.

Final Recommendation For Target Directories

You should not change the contents of a replication target directory. It should be treated as a "read-only" replica, even though StorNext does not enforce a read-only restriction.

If you change a file in a replication target directory you may be changing the file contents in other target directories due to the "hard-link" usage in replication. Furthermore, if you change or add files in a directory, that directory may disappear due to subsequent replications. (Using `exportrepcopy` avoids this second issue.)

What if you want to change an existing source directory into a target directory? This can be done, but without special configuration care the original source policy assignment will be lost. A directory can have only one snpolicyd policy assigned to it (and all of the files and subdirectories it contains.) If you change the policy assignment, the characteristics specified in the previous policy are forgotten.

StorNext snpolicyd Policies

You can create and edit StorNext snpolicyd policies from the StorNext GUI or with the snpolicy command. These snpolicyd policies differ from StorNext Storage Manager (SM) policies in several respects. Following is a summary of some of the similarities and differences between these two kinds of policies.

Storage Policy Option	Storage Manager Policy	snpolicyd Policy
<i>Configurable via the StorNext GUI?</i>	Yes. Select the Storage Policies menu's Storage Manager option.	Yes. Select the Storage Policies menu's Replication / Deduplication option.
<i>Configurable via the command line?</i>	Yes. Use fs commands such as fsaddclass and fsmodclass	Yes. Use the snpolicy command.
<i>Where are policy internals stored?</i>	In Storage Manager Database. One database per machine.	In the managed file system, in a private directory.
<i>Is the policy used across file systems?</i>	Yes. One policy can be used in multiple directories and multiple file systems.	No. Policies apply to one file system, but can be applied to multiple directories.
<i>Functions?</i>	Store (to tape or SDISK), retrieve, truncate files.	Deduplicate, replicate, truncate files.
<i>How are truncated files retrieved?</i>	The entire file must be retrieved.	Only portions of the file containing needed regions may be retrieved.
<i>Schedules?</i>	fspolicy / schedules stored in Database.	Linux crontab scheduling.

Storage Policy Option	Storage Manager Policy	snpolicyd Policy
<i>Management daemon?</i>	multiple fs_... processes	snpolicyd
<i>Previous file versions recoverable?</i>	Yes. Recover previous tape version with the fsrecover command. Up to 10 tape versions.	Yes. Previous replicated copies can be kept in previous replication directories. Up to 16.

Example

You create an snpolicyd policy with the StorNext GUI or with the snpolicy command. The snpolicy command is in directory /usr/cvfs/bin. Command line configuration must be done by the Linux root user.

Suppose you create directory /stornext/snfs1/photos in file system /stornext/snfs1 on machine host1. You then use the StorNext GUI to create a replication policy named photo_rep to replicate this directory to file system /stornext/backup on machine host2. (As in the previous example, the policy was configured to keep two copies on the target.)

Now use the snpolicy command to see more internal details about the policy called photo_rep.

Use this command:

```
/usr/cvfs/config/snpolicy -dumppol/stornext/snfs1/photos
```

The command's output looks like this:

```
inherit=photo_rep
key=1720399
root=/stornext/snfs1/photos
dedup=off
dedup_filter=off
max_seg_size=1G
max_seg_age=5m
dedup_age=1m
dedup_min_size=4K
dedup_seg_size=1G
dedup_min_round=8M
dedup_max_round=256M
```

```
dedup_bfst="localhost"  
fencepost_gap=16M  
trunc=off  
trunc_age=365d  
trunc_low_water=0  
trunc_high_water=0  
rep_output=true  
rep_report=true  
rep_target="target://stornext/backup@host2:"  
rep_copies=2
```

There is a lot of output, most of which we don't have to consider now. Some of the important values are:

- `inherit=photo_rep`: This means the policy controlling this directory receives its parameters from the policy named `photo_rep`. Remember, when you create a policy you give it a name, and the policy name belongs to the file system. There could be a different policy named `photo_rep` in a different file system, and there would be no connection between the two `photo_rep` policies.
- `rep_output=true`: This means the policy is a source of replication.
- `rep_copies=2`: This means you want to keep two copies (instances) of the replicated directory on the target file system.
- `rep_target="target://stornext/backup@host2:"`: This tells you the replication target directory is a directory in file system `/stornext/backup` on machine `host2`. But which directory name will be used in that file system? Since you did not specify anything else, the source directory name will be used. In this case the source directory name in the source file system is `photos`, so the target directory names will be `/stornext/backup/photos` and `/stornext/backup/photos.1`.
- `dedup=off`: This means the files in this directory are not deduplicated before being replicated. Deduplication and replication are discussed in another section.

One comment about a field *not* in the command output. Since there is no line for `rep_input=true`, this means this directory is not a replication target directory. This is not surprising. While it is true that a replication target can also be a replication source, that is an advanced case not covered here.

Replication Copies = 2 (Detail)

In this section we'll examine in more detail what two copies on the target (`rep_copies=2`) means.

Assume that we begin with files `file1`, `file2`, and `file3` in the source directory. After the first replication, we expect to see three files in the target directory `/stornext/ backup/photos`.

After running the command: `ls -l /stornext/backup/photos`, the output looks like this:

```
total 4144
-rwxr-xr-x 2 testuser root 1388936 Jan 26 10:11 file1
-rw-r--r-- 2 testuser root 1430896 Jan 26 10:11 file2
-rw-r--r-- 2 testuser root 1397888 Jan 26 10:12 file3
```

Notice the "link count" of 2 in front of the user name for each file. This means that each of these files has two links - two names. One name is the entry in directory `/stornext/backup/photos`. The other name is a name in a subdirectory of `/stornext/backup/.rep_private`. As its name suggests, directory `.rep_private` in the root of a managed file system contains internal information used to manage replication and deduplication.

Digression

Following is some additional detail which you may want to skip the first time you read this section.

Below is output from the command `ls -l /stornext/backup/.rep_private`:

```
total 144
drwx----- 19 root root 2057 Jan 26 10:12
00047DA110919C87
drwx----- 3 root root 2054 Jan 26 10:12 config
drwx----- 3 root root 2056 Jan 25 14:11 oldest
drwx----- 3 root root 2116 Jan 26 10:13 pending
drwx----- 3 root root 2132 Jan 26 10:13 queued
drwx----- 2 root root 2048 Jan 21 16:56 source_state
drwx----- 3 root root 2048 Jan 20 17:13 target
```


Second Replication

The "standard" case - when we have replicated files once - is that the link count for the target file will be two.

Now let's say that we add `file4` and `file5` to the source directory and replicate again. After the second replication, target directory `/stornext/backup/photos` contains the following:

```
total 6864
-rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
-rw-r--r-- 3 testuser root 1430896 Jan 26 10:11 file2
-rw-r--r-- 3 testuser root 1397888 Jan 26 10:12 file3
-rwxr-xr-x 2 testuser root 1388994 Jan 26 11:02 file4
-rwxr-xr-x 2 testuser root 1388965 Jan 26 11:03 file5
```

Target directory `/stornext/backup/photos.1` contains the previous replication:

```
total 4144
-rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
-rw-r--r-- 3 testuser root 1430896 Jan 26 10:11 file2
-rw-r--r-- 3 testuser root 1397888 Jan 26 10:12 file3
```

Notice that `file1`, `file2`, and `file3` each have a link count of 3. One link (name) is in directory `photos`, another link is in directory `photos.1`, and the third is the `snpolicyd` "internal" link in the `.rep_private` directory. The two new files, `file4` and `file5`, appear only in the new directory and in the `.rep_private` directory. They have a link count of 2.

Since `file1`, `file2`, and `file3` are really the same file in directories `photos` and `photos.1`, no extra disk storage is needed for these files when replicating again. In general, when you use replication with more than one copy retained on the target, no additional storage is needed for unchanged files. If a file is changed, both the old and the new version are retained, so additional storage is needed in this case. (Unless deduplication is also used, which is discussed later.)

Now let's make two changes. Say we remove `file4` in the source directory and modify `file2`. After the next replication, target directory `photos` contains the following:

```
total 5200
-rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
```

```
-rw-r--r--  2 testuser root 1123155 Jan 26 11:20 file2  
-rw-r--r--  3 testuser root 1397888 Jan 26 10:12 file3  
-rwxr-xr-x  3 testuser root 1388965 Jan 26 11:03 file5
```

Target directory photos.1 contains:

total 6864

```
-rwxr-xr-x  3 testuser root 1388936 Jan 26 10:11 file1  
-rw-r--r--  1 testuser root 1430896 Jan 26 10:11 file2  
-rw-r--r--  3 testuser root 1397888 Jan 26 10:12 file3  
-rwxr-xr-x  2 testuser root 1388994 Jan 26 11:02 file4  
-rwxr-xr-x  3 testuser root 1388965 Jan 26 11:03 file5
```

The three files, file1, file3 and file5, were unchanged, so they have the expected link count of 3. One name occurs in photos, one in photos.1, and the third in a subdirectory of .rep_private. Since file2 was changed in directory photos, it has a link count of 2: one link in photos and one in .rep_private.

The file named file2 in photos.1 now has a link count of 1. It is not the same file as the current file2 (notice the different length). The file2 in photos.1 is there for "historical" or recovery purposes only. It represents the previous replication of the directory.

Notice also that file4 in photos.1 has a link count of 2: one for the photos.1 copy and one for the .rep_private copy. There is no file named file4 in the current replication directory named photos.

File1, file3 and file5 share the same disk storage. The storage for file4 is only shared with the .rep_private copy, and this storage will be freed when the next replication occurs. The older version of file2 exists only in photos.1, and its storage will be removed in the next replication.

More About Replication Target Directories

In the previous replication example, source directory /stornext/snfs1/photos on host1 was replicated to target directory /stornext/backup/photos on host2. If the number of copies to keep is more than 1, the previous replication directories are named /stornext/backup/photos.1, /stornext/backup/photos.2, etc.

The default name on the target is the same pathname relative to the file system mount point as the source directory name is relative to the source file system mount point.

Examples

Suppose you apply a replication policy to directory `/stornext/snfs1/a/b/c/d/photos` in file system `/stornext/snfs1`, and replicate to file system `/stornext/backup`. The default target replication directory name would be `/stornext/backup/a/b/c/d/photos`, and previous replication directories would be `stornext/backup/a/b/c/d/photos.1`, etc.

There are other options that can be specified on either the source policy or on the target policy. Since we have been concentrating on the source policy, following are examples of changes there.

When creating or editing a policy, specify the alternative path names in the area of the screen labeled **Pathname on Target** on the **Outbound Replication** tab. When you click the **Override** label, a field appears where you can type some text. Some hints appear above that field, showing special entry values such as `%P` and `%D`.

In all of the following examples, assume that the replication source directory is `/stornext/snfs/photos/ocean` in directory `photos/ocean` relative to the source file system `/stornext/snfs1`. For this example we will replicate to file system `/stornext/backup`. We know that if we do not override the "Pathname on Target" value, the replication target directory name will be `/stornext/backup/photos/ocean`.

- If you enter a string without any of the "%" formatting characters, the replication directory will be the name you specify. For example, if you specify `open/sesame` for Pathname on Target, the replication directory would be `/stornext/backup/open/sesame`.
- `%P` means source pathname relative to the source file system. For example, if you specify `open/sesame/%P` for Pathname on Target, the replication directory would be `/stornext/backup/open/sesame/photos/ocean`
- `%D` means today's date. `%T` means the replication time. For example, if you specify `%D/%T/%P` for Pathname on Target, the replication directory would be `/stornext/backup/2010-02-02/16_30_22/photos/ocean` (on February 2, 2010).

- %H means source hostname. This would be a good value to use when more than one source machine is replicating files to the same target machine and target file system.

There are a lot of ways the "%" characters, and name specifications can be combined.

Note two important facts:

- It is possible to generate target name collisions by specifying the same Pathname on Target for more than one policy. For example, you might choose "daily" for Pathname on Target in two source replication policies. In that case the first policy to replicate would succeed, and the second would fail due to the name collision. Using %H, %P, etc. can help you avoid these collisions.
- Specifying a Pathname on Target is required if you want to replicate into a Storage Manager relation point. This will be discussed further in another section.

Deduplication Overview

Here is the view from 100,000 feet. When StorNext deduplication is enabled, a file is examined and logically split into data segments called BLOBs (binary large objects). Each BLOB has a 128-bit BLOB tag. A file can be reconstructed from the list of BLOBs that make up a file. The data for each BLOB is stored in the blockpool for a machine. We can use the command `snpolicy -report file_pathname` to see the list of BLOB tags for a deduplicated file.

When a deduplicated file is replicated, the BLOBs are replicated from the blockpool on the source machine to the blockpool on the target machine. If the source file system and the target file system are both hosted on the same machine, no data movement is needed. If the same BLOB tag occurs several times (in one file or in many files) only one copy of the data BLOB exists in the blockpool. During replication that one copy must be copied to the target blockpool only once.

This is why deduplicated replication can be more efficient than non-deduplicated replication. With non-deduplicated replication, any change in a file requires that the entire file be recopied from the source to the target. And, if the data is mostly the same in several files (or

exactly the same), non-deduplicated replication still copies each entire file from the source file system to the target.

The following example uses these three files and their corresponding sizes:

f.2m - 2 MB

f.4m - 4 MB

g.4m - 4 MB

The maximum segment size in this example is 1 MB. (That size is artificially low for this example only.)

If we look at the "snpolicy -report" output for the directory containing these files, we see the following:

```
./f.2m
  policy: 1720449      inode: 1720468
  flags: TAG
  mtime: 2010-01-26 14:20:03.590665672 CST
  ingest: 2010-01-26 14:20:03.590665672 CST
  size:      2097152 disk blocks: 4096
  seqno:      4 blk seqno:      2
  offset:      0 length:      1048576 tag:
D03281B0629858844F20BB791A60BD67
  offset:      1048576 length:      1048576 tag:
12665A8E440FC4EF2B0C28B5D5B28159
./f.4m
  policy: 1720449      inode: 1720470
  flags: TAG
  mtime: 2010-01-26 14:22:56.798334104 CST
  ingest: 2010-01-26 14:22:56.798334104 CST
  size:      4194304 disk blocks: 8192
  seqno:      4 blk seqno:      4
  offset:      0 length:      1048576 tag:
D03281B0629858844F20BB791A60BD67
  offset:      1048576 length:      1048576 tag:
12665A8E440FC4EF2B0C28B5D5B28159
  offset:      2097152 length:      1048576 tag:
7F02E08B3D8C35541E80613142552316
  offset:      3145728 length:      1048576 tag:
1FEC787120BEFA7E6685DF18110DF212
```

```

./g.4m
  policy: 1720449      inode: 1720471
  flags: TAG
  mtime: 2010-01-26 14:23:28.957445176 CST
  ingest: 2010-01-26 14:23:28.957445176 CST
  size:      4194304 disk blocks: 8192
  seqno:     5 blk seqno:      4
  offset:    0 length:      1048576 tag:
D03281B0629858844F20BB791A60BD67
  offset:    1048576 length: 1048576 tag:
DF54D6B832121A80FCB91EC0322CD5D3
  offset:    2097152 length: 1048576 tag:
7F02E08B3D8C35541E80613142552316
  offset:    3145728 length: 1048576 tag:
1FEC787120BEFA7E6685DF18110DF212

```

All three files have the same contents in the first megabyte starting at offset 0. The tag for that BLOB is D03281B0629858844F20BB791A60BD67, and that BLOB is stored only once in the blockpool. The second megabyte is the same for files f.2m and f.4m (tag 12665A8E440FC4EF2B0C28B5D5B28159) but file g.4m has a different BLOB in those bytes. The final 2 megabytes of files f.4m and g.4m are the same.

Remember that the above is an artificial example. In actual practice BLOBs do not line up on 1 MByte boundaries and are not all the same length.

Enabling Deduplication

When creating or editing a policy through the StorNext GUI, select the **Deduplication** tab and make sure deduplication is enabled (On). If you use the `snpolicy dumppol` option, you will see `dedup=on` in the output when the policy has deduplication enabled.

Deduplication Modification Time

Note that in the `"snpolicy -dumppol"` output shown earlier we also saw `dedup_age=1m`. This means the file may be deduplicated after it has not changed for at least one minute. If a file is being written its file modification time (mtime) will be updated as the file is being written. Deduplication age specifies how far in the past the modification time must be before a file can be considered for deduplication.

Deduplication and Blockpools

If replication is used, a blockpool is required even if deduplication is not used in any policy on a machine. However, in this situation the blockpool does not store any BLOBs from any file system and can therefore be small: several megabytes is all that is needed.

If you enable deduplication on any policy in the machine, StorNext stores BLOBs in the blockpool and additional space is required. Make sure you have enough space to store file system data if you enable deduplication. You also need space for BLOBs in the blockpool if the machine contains replication target directories for deduplicated replication source directories on other machines.

The current StorNext release supports only one blockpool per machine. Any file system on the machine that needs a blockpool will use that one and only blockpool.

Deduplication and Truncation

Let's look again at the directory in the previous section that has the three files `f.2m`, `f.4m`, and `g.4m`. Using the Linux command `ls -ls` shows this in the directory:

```
total 10240
2048 -rw-r--r-- 1 root root 2097152 Jan 26 14:22 f.2m
4096 -rw-r--r-- 1 root root 4194304 Jan 26 14:22 f.4m
4096 -rw-r--r-- 1 root root 4194304 Jan 26 14:23 g.4m
```

The first column on the left shows the total number of blocks (1024 bytes per block) contained in each file. The column before the date shows the file size in bytes.

StorNext can truncate files that have been deduplicated. By “truncate” we mean that the disk blocks for the file have been freed. If the deduplicated files shown above are truncated, the `ls -ls` command shows this:

```
total 0
0 -rw-r--r-- 1 root root 2097152 Jan 26 14:22 f.2m
0 -rw-r--r-- 1 root root 4194304 Jan 26 14:22 f.4m
0 -rw-r--r-- 1 root root 4194304 Jan 26 14:23 g.4m
```


There are no blocks in any of the three files, although each file retains its correct size.

(As an exercise, in the previous "ls -l" and "ls -ls" examples, what does the line that says "total some_number" tell us?)

When an application or command accesses any of the data in a truncated file, StorNext retrieves the data it needs from the blockpool. This may be the entire file for a small file. For a larger file, a portion of the file would be retrieved: a portion at least large enough to contain the file region required. If you read the entire file, the entire file will be retrieved.

Truncation provides the mechanism by which file system storage space may be reduced. When a file is truncated it takes no space in its file system, but space for its BLOBs is required in the blockpool. If we receive deduplication benefit (that is, if the same BLOB data occurs in more than one place,) then we have less space used in the blockpool than would be in the original file system.

Enabling Deduplication and Truncation

In order to enable truncation, both deduplication and truncation must be enabled in the storage policy. The StorNext GUI contains tabs for both deduplication and truncation which allow you to enable deduplication and truncation respectively.

Before a file is truncated it must pass a "Minimum Idle Time Before Truncation" test. If this minimum age is ten minutes, then ten minutes must elapse after the last file modification or file read before truncation can occur. The default value for the minimum idle time is 365 days.

In the output from "snpolicy -dumpool" the parameters we have been discussing are displayed like this:

```
trunc=on
trunc_age=365d
```

Storage Manager Truncation

Storage Manager also truncates files. Storage Manager truncation is similar to but not identical with the deduplication-based truncation we have been discussing. Storage Manager truncation will be discussed again when we consider deduplication / replication with Storage Manager.

Replication, Deduplication and Truncation

Consider a directory which is being deduplicated and replicated. We mentioned earlier that in this case data BLOBs move from the blockpool on the source machine to the blockpool on the target machine. When replication happens (the replication namespace realization,) the files appear in the target directory as truncated files. This is true regardless of whether or not the files were truncated in the source directory at replication time.

Let's look again at the example target directories `photos` and `photos.1` after the last replication. If the replication source directory had deduplication enabled, then `"ls -ls"` in target directory `photos` shows the following:

```
total 0
0 -rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
0 -rw-r--r--  2 testuser root 1123155 Jan 27 11:20 file2
0 -rw-r--r--  3 testuser root 1397888 Jan 26 10:12 file3
0 -rwxr-xr-x 3 testuser root 1388965 Jan 26 11:03 file5
```

Target directory `photos.1` contains the following:

```
total 0
0 -rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
0 -rw-r--r--  1 testuser root 1430896 Jan 26 10:11 file2
0 -rw-r--r--  3 testuser root 1397888 Jan 26 10:12 file3
0 -rwxr-xr-x 2 testuser root 1388994 Jan 26 11:02 file4
0 -rwxr-xr-x 3 testuser root 1388965 Jan 26 11:03 file5
```

The file link counts (3, 2, or 1) are the same as in the earlier replication example. The principle is the same: `file1` in `photos` has 3 links. The other two instances are `file1` in `photos.1` and a file underneath the `.rep_private` directory. All the links are to a truncated file: a file whose length is 1388936 bytes, but which contains no blocks. If we read any of the three links, the file would be partially or fully retrieved.

The replicated files appear as truncated files even if deduplication is not explicitly enabled in any policy on the target machine. Remember that this means there must be blockpool space for the replicated BLOBs if a deduplicated directory is replicated onto the machine.

Replication, Deduplication and Storage Manager

Both StorNext replication and StorNext deduplication can be used with Storage Manager. The following discussion assumes you are already familiar with replication and deduplication, and also with Storage Manager.

Here are some interesting possibilities:

- 1 Replicate from a source directory into a target directory where the target directory is within a Storage Manager relation point. Then the replicated files will be stored to tape by Storage Manager. This can be done with deduplicated or non-deduplicated replication.
- 2 Replicate from a source directory that is managed by Storage Manager. This can be done with deduplicated or non-deduplicated replication. It doesn't matter for the source if the target directory is also managed by Storage Manager.
- 3 Use deduplication within a Storage Manager relation point. This means the files will be deduplicated, and the deduplicated data will be stored in the blockpool. In addition, Storage Manager will make tape copies of the files.

Let's consider replicating into a Storage Manager relation point.

Replicating into a Storage Manager Relation Point

To replicate into a relation point, specify a target directory underneath a Storage Manager relation point. Do this with the parameter "Pathname on Target" in the StorNext GUI, or with `rep_realize=...` when configuring a policy with the `snpolicy` command.

Example

Suppose we are replicating to file system `/stornext/backups` on a target machine, and `/stornext/backups/sm1` is a Storage Manager relation point in that file system.

Some possible choices for "Pathname on Target" would be

- `sm1/%P`
- `sm1/mystuff`

- `sm1/%H/%P`

You shouldn't specify something like `/stornext/backups/sm1/mystuff` because "Pathname on Target" is relative to the target file system mount point, which in this case is `/stornext/backups`.

If "Copies to Keep on Target" is more than 1, the rules discussed earlier determine the names for the directories in subsequent replications.

Example

If we replicate the source directory named `photos` into a relation point using the "Pathname on Target" `sm1/%P`, we end up with directories like `/stornext/backups/sm1/photos`, `/stornext/backups/sm1/photos.1` and so on for the replicated directories when we are keeping more than one copy on the target.

The directories `photos` and `photos.1` are in the SM relation point. Let's say we have the two directories `photos` and `photos.1` with the contents that we discussed earlier.

Target directory `/stornext/backups/sm1/photos` contains the following:

```
-rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
-rw-r--r--  2 testuser root 1123155 Jan 27 11:20 file2
-rw-r--r--  3 testuser root 1397888 Jan 26 10:12 file3
-rwxr-xr-x 3 testuser root 1388965 Jan 26 11:03 file5
```

Target directory `/stornext/backups/sm1/photos.1` contains the following:

```
-rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
-rw-r--r--  1 testuser root 1430896 Jan 26 10:11 file2
-rw-r--r--  3 testuser root 1397888 Jan 26 10:12 file3
-rwxr-xr-x 2 testuser root 1388994 Jan 26 11:02 file4
-rwxr-xr-x 3 testuser root 1388965 Jan 26 11:03 file5
```

Question: Will Storage Manager store all the files in `photos` after the most recent replication? The answer is no. In this example, `file2` is a file that was modified since the previous replication. Thus `file2` is the only file that will be stored by Storage Manager after the most recent replication.

When replication occurs we create store candidates for the new or changed files that were included in the most recent replication within a

relation point. In this example, only `file2` will be a store candidate after the latest replication. You can use the `showc` command to see the new Storage Manager store candidates after a replication.

Note: Even if you created a store candidate for every file in the replicated target directory, only the new or changed files would be stored by SM. This is because the other files are links to files that have already been stored by Storage Manager, or at least files that were already on the Storage Manager store candidates list.

Truncation and Deduplication / Replication (with and without SM)

We have already mentioned how deduplication allows files to be truncated. "Truncated" in this case means that the extents have been partially or completely removed from disk, and that the `snpolicyd` daemon must reconstitute the missing extents when a process wants to access them.

We also discussed how we can use the `ls -ls` command to identify truncated files. We looked for files with "0" in the first column of the output of `ls -ls`. The 0 means there are no blocks associated with the file. The file size field in the `ls -l` or `ls -ls` output reflects the real size of the file, and is not changed when the file is truncated.

Example

In the earlier example we this saw this output (for a truncated file) after running `ls -ls`:

```
0 -rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
```

For an untruncated file, the `ls -ls` output might look something like this:

```
1360 -rwxr-xr-x 3 testuser root 1388936 Jan 26 10:11 file1
```

The 1360 blocks in this file are enough to contain a file of size 1388936 (since $1360 * 1024 = 1392640$). However, we might also see a blocks value that was non-zero but not enough to contain the entire file size. This might indicate the following:

- A sparse file (this will not be discussed here)
- A file with a stub left on the disk

- A file that had been partially retrieved

Both Storage Manager and snpolicyd (replication / deduplication) can truncate files and can retrieve truncated files.

Both Storage Manager and snpolicyd can be configured to leave a stub file on disk when a file is truncated. Using the StorNext GUI you can configure the deduplication stub size on the **Deduplication** tab when creating or editing a replication / deduplication policy. A non-zero stub size must be a multiple of the file system block size.

Both Storage Manager and snpolicyd will retrieve a file when a portion of the file is read that is not already on disk. For Storage Manager there are really three different possibilities for a file's truncation state:

- File is totally truncated. The file has no block in the file system. Reading any byte of the file causes Storage Manager to retrieve the entire file.
- File is truncated, but there is a stub. Reading within the stub causes no retrieval. Reading anything not in the stub causes Storage Manager to retrieve the entire file.
- File is completely on disk.

For a truncated file that was deduplicated by snpolicyd, there can be partial file retrieval from the blockpool. In this situation there is one more possibility in addition to the three previous possibilities:

- Partially retrieved. The file has some data on disk (besides the stub) but the entire file is not on disk.

Example

Suppose you have a 100 GB file that is truncated. If a process reads a few bytes (at the front or even in the middle of the file), several megabytes of file data are retrieved from the blockpool and the process continues. There is no need for the entire file to be retrieved. If more of the file is read, even larger chunks of the file are retrieved.

You can see the snpolicyd state of a file by using the command "snpolicy -report".

Example

Running the command `snpolicy -report /stornext/sn1/dd1/kcm2` gives us output similar to this:

```
/stornext/sn1/dd1/kcm2
  policy: 18      inode: 1704267
  flags: TRUNC TAG
  mtime: 2010-02-05 11:01:25.960012768 CST
  ingest: 2010-02-05 11:01:25.960012768 CST
  size:          1388936 disk blocks: 0
  seqno:         16 blk seqno:        3
  offset:                0 length:    1388936 tag:
0D4093057370DB4FA7EF8162C23AE416
```

The line beginning with "flags:" contains the keyword TRUNC. This tells us that at least part of the file is not on disk in the file system and must be retrieved to be used.

If only snpolicyd is managing a directory, snpolicyd can truncate files when the snpolicyd rules are satisfied. This means that the deduplication has happened and the file is big enough and perhaps old enough. "Large enough" and "old enough" are determined by the deduplication policy parameters.

If only Storage Manager is managing a directory, the Storage Manager truncation rules determine whether and when a file can be truncated. This usually means that all Storage Manager copies have been made and that the file is large enough and old enough. "Large enough" and "old enough" are determined by the Storage Manager policy parameters.

If *both* Storage Manager and snpolicyd are managing a directory, Storage Manager must do the truncation. Storage Manager can only truncate a file when the Storage Manager rules are satisfied and any snpolicyd data copies have been completed.

You will know that both Storage Manager and snpolicyd are managing a directory if:

- The directory is a deduplicated directory and/or a replication source directory, and the directory is a Storage Manager relation point or is within a Storage Manager relation point.
- The directory is a replication target directory within a Storage manager relation point.

The table below summarizes some of the possibilities for snpolicyd managed directories and when truncation is allowed.

Snpolicyd State of the Directory	Directory is in an SM Relation Point	Directory is <i>Not</i> in an SM Relation Point
Non-deduplication Replication Source	SM can truncate when replications are complete	No truncation
Deduplication Replication Source	SM can truncate when deduplication has happened - even before replication	snpolicyd can truncate after deduplication
Deduplication Without Replication	SM can truncate when deduplication has happened	snpolicyd can truncate after deduplication
Target of Deduplication Source	Files are replicated as truncated (0 blocks). However, SM will eventually store each replicated file, causing it to be retrieved by snpolicyd on the target. Retrieved files must be truncated by SM and can only be truncated after all SM copies are made.	Files are replicated as truncated (0 blocks)
Target of Deduplication Source with "Replicate Deduplicated Content" Off	Files are replicated untruncated and are not tagged (deduplicated). Files can be truncated by SM after all SM copies are made (normal SM rules).	Files are replicated untruncated and are not tagged (deduplicated). Not truncatable.
Target of Dedup source with "Replicate Deduplicated Content" off but deduplication is on in the target policy.	Files are replicated untruncated and are not tagged (deduplicated). Files can be truncated by SM when deduplicated by snpolicyd and stored by SM.	Files are replicated untruncated and are not tagged (deduplicated). Files can be truncated by snpolicyd after deduplication.

The following sections summarize some of the facts above (and add some more information) in a "usage case" or "scenario" format.

Replicating From an SM Relation Point and/or Deduplicating the Relation Point

For a new configuration, create the relation point first. Then make it a replication source by applying an snpolicyd policy with outbound replication enabled.

From the command line, you could use the following commands.

Note: These commands assume that the Storage Manager relation point and replication policy have already been configured.

```
faddrelation directory_path -c sm_policy_name  
spolicy -assignpolicy directory_path -inherit  
replication_policy_name
```

Remember that the directory should be empty before using `fsaddrelation`, or else the command will try to unmount the file system (which is often hard to do).

When a file is both an SM relation point and a replication source, the files cannot be truncated by SM until:

- 1 Either all replications have been completed (non-deduplicated replication)
- OR
- 2 All files in the directory have been deduplicated (deduplicated replication)

If a truncated file is both deduplicated and stored by SM, it can be retrieved by either service. By default we retrieve using `snpolicyd` (from the blockpool) and only use the SM copy if there is an error retrieving from the blockpool.

You can use the `fsretrieve` command to force retrieval from Storage Manager instead of from `snpolicyd`.

Adding Source Replication or Deduplication to an Existing SM Relation Point

The following table summarizes the key points you should consider:

When You Are Making a Directory with Existing SM Managed Files Into This:	Then Expect This:
Snpolicyd deduplication policy (no replication)	<ul style="list-style-type: none"> • Untruncated files are deduplicated per snpolicyd policy. • SM truncated files will not be deduplicated until SM retrieval occurs. (snpolicyd will not retrieve the files from SM.) • Once retrieved from SM, files cannot be re-truncated by SM until deduplication is complete. <p>Therefore files may not all be deduplicated.</p>
Snpolicyd deduplication policy that is also a replication source	<p>About the same as above. SM truncated files are not deduplicated or replicated until something causes SM retrieval of the file.</p> <p>Thus there may be some files not deduplicated and not replicated.</p>
Snpolicyd policy that is a replication source with no deduplication	<p>Similar to above. Files are not replicated until something causes SM retrieval. Once retrieved SM will not truncate the file again until each target of the replication policy has its copy.</p> <p>Not all files will be deduplicated unless retrieved.</p>

Adding Target Replication to an SM Relation Point (New or Existing)

When adding targets within an existing SM relation point, the concepts are a little simpler because a new directory is created each time a

replication occurs. There are no existing files other than previously replicated files.

Remember that you must specify a directory within a Storage Manager relation point when you want replicated files to be stored by Storage Manager.

When replication occurs into a directory in a Storage Manager relation point, the replicated files become SM store candidates (unless they are links to previously replicated files). Storage Manager can then store the files based on age and size. Age is determined by the file's modification time in the source directory because the access and modification times are replicated when a file is replicated.

Storage Manager can store replicated files after they have passed the minimum time, regardless of whether or not they have been truncated by `snpolicyd`. Storage Manager retrieves a truncated file from `snpolicyd` in order to store it to SM tape. Deduplicated replicated files are replicated as truncated files, but they are retrieved by `snpolicyd` when the replication is into a Storage Manager relation point.

Note the following implications:

- 1 This means that more file system space will be used when replicating deduplicated files into an SM relation point than is used when replicating deduplicated files into a directory that is not a relation point. In the latter case there is no StorNext process that will cause the file to be retrieved from the blockpool.
- 2 When the file is retrieved it can be re-truncated after all SM copies have been made. Storage Manager will do the truncation. You can configure the SM policy so that it truncates the file immediately after all SM copies have been made.
- 3 This behavior is different than in the case where we add replication/deduplication to a SM relation point. Truncated files are not automatically retrieved from SM tape so that they can be replicated or deduplicated, but deduplicated files from the blockpool are retrieved so that they can be stored by SM.

Adding Storage Manager to an Existing `snpolicyd` Directory

You cannot add a Storage Manager relation point to an existing replication target directory. You would have to create a new directory, add the SM relation point to that directory, and then create or edit a

snpolicyd policy to realize to a directory or a set of directories inside that relation point.

When adding a Storage Manager relation point to any existing directory, one of the following must be true:

- 1 The directory must be empty.
- 2 You must be able to temporarily unmount the file system. (It gets remounted as part of the add relation point process.)

If the directory is empty there is nothing to worry about. If it is not empty you must make sure no process is working in the directory and no files are open. The directory should not be NFS exported or Samba shared.

Once the relation point has been added, Storage Manager makes copies of the files according to the Storage Manager policy settings. As mentioned earlier, Storage Manager retrieves a file from the blockpool if it needs to in order to store the file.

The snpolicyd Debug Log

A log of snpolicyd actions and errors is maintained in directory `/usr/cvfs/debug`. The log file is named `snpolicy.out`. Previous versions of the log file are called `snpolicy.out.1`, `snpolicy.out.2`, and so on.

Various debugging options can be enabled with the `snpolicy` command. For example, the command `snpolicy -debug=/stornext/sn1 -dflags=events,replicate`

turns on debug messages for events processed by snpolicyd and for replication related activity. The `-debug=` option specifies any file system managed by snpolicyd (any file system with replication / deduplication enabled).

You can find the list of possible `dflags` options by using the following command:

```
snpolicy -helpdebugflags
```

Here is some sample snpolicyd.out log for an ongoing replication:

```
(D) [0209 17:22:20.903918 3398] Sending rep_realize %H/%P
(D) [0209 17:22:20.934098 3398] release_pending_rep_locked@1109
0x14f86e0 ref 1 state started
(D) [0209 17:22:20.934552 18275] release_rep_target_locked
126540130333 ref 0 state sending metadata
(D) [0209 17:22:20.934582 18275] release_rep_target_locked@827
0x14f86e0 ref 1 state started
(D) [0209 17:22:20.934597 18275] process successful replication,
cnt 9/9 space 1996232
(D) [0209 17:22:20.937694 18276] /stornext/sn3: replication reply
for key 1704023 stream 126540130333
(D) [0209 17:22:20.937720 18276] /stornext/sn3: metadata for '/
stornext/sn3/rep5' accepted by target://stornext/sn4@kcm-
rhe15464:
(D) [0209 17:22:20.938490 18276] update_rep_target_file
126540130333 0 => 3
(I) [0209 17:22:23] /stornext/sn3: data replication for '/snfs/
sn3/rep5'
                                completed to target://stornext/sn4@kcm-
rhe15464: in 2.276911 secs
                                9/9 files (Data/Meta) updated
                                1949 Kbytes in 1.741705 secs 1952/1 Kbytes sent/
received
(D) [0209 17:22:23.252035 18276] post_process_pending_replication
for stream 126540130332
(D) [0209 17:22:23.321761 18276] update_rep_target_file
126540130333 3 => 4
(D) [0209 17:22:23.328021 18276] release_rep_target_locked
126540130333 ref 0 state completed
(D) [0209 17:22:23.328088 18276] release_rep_target_locked@827
0x14f86e0 ref 1 state started
(D) [0209 17:22:23.328109 18276] Freed target stream 126540130333
```

Appendix B: Additional Replication and Deduplication Information
The snpolicyd Debug Log



Appendix C

High Availability Systems

The StorNext High Availability (HA) feature allows you to configure and operate a redundant server that can quickly assume control of the StorNext file systems and management data in the event of certain software, hardware and network failures on the primary server.

This appendix contains the following topics which provide an in-depth look at HA systems and operation:

- [High Availability Overview](#)
- [HA Internals: HAmon Timers and the ARB Protocol](#)
- [Configuration and Conversion to HA](#)
- [Managing High Availability in the StorNext GUI](#)
- [High Availability Operation](#)
- [HA Resets](#)
- [HA Tracing and Log Files](#)
- [FSM failover in HA Environments](#)
- [Replacing an HA System](#)

High Availability Overview

The primary advantage of an HA system is file system availability, because an HA configuration has redundant servers. During operation, if one server fails, failover occurs automatically and operations are resumed on its peer server.

At any point in time, only one of the two servers is allowed to control and update StorNext metadata and databases. The HA feature enforces this rule by monitoring for conditions that might allow conflicts of control that could lead to data corruption.

Before this so-called Split Brain Scenario would occur, the failing server is reset at the hardware level, which causes it to immediately relinquish all control. The redundant server is able to take control without any risk of split-brain data corruption. The HA feature provides this protection without requiring special hardware, and HA resets occur only when necessary according to HA protection rules.

Arbitration block (ARB) updates by the controlling server for a file system provide the most basic level of communication between the HA servers. If updates stop, the controlling server must relinquish control within a fixed amount of time. The server is reset automatically if control has not been released within that time limit.

Starting after the last-observed update of the ARB, the redundant server can assume control safely by waiting the prescribed amount of time. In addition, the ARB has a protocol that ensures that only one server takes control, and the updates of the ARB are the method of keeping control. So, the ARB method of control and the HA method of ensuring release of control combine to protect file system metadata from uncontrolled updates.

Management data protection builds on the same basic HA mechanism through the functions of the special shared file system, which contains all the management data needing protection. To avoid an HA reset when relinquishing control, the shared file system must be unmounted within the fixed-time window after the last update of the ARB.

Management data is protected against control conflicts because it cannot be accessed after the file system is unmounted. When the file system is not unmounted within the time window, the automatic HA reset relinquishes all control immediately.

The HA system monitors each file system separately. Individual file systems can be controlled by either server. However, StorNext Storage Manager (SNSM) requires that all managed file systems be collocated with the management processes. So, the shared file system and all managed file systems are run together on one server. Unmanaged file systems can run on either server, and they can fail over to the other server as long as they perform failover according to the HA time rules described above.

When it is necessary to make configuration changes or perform administrative functions that might otherwise trigger an HA reset, `snhamgr`, the HA Manager Subsystem (patent pending), provides the necessary controls for shutting down one server and operating the other server with HA monitoring turned off. `snhamgr` allows the individual servers to be placed in one of several modes that regulate starting StorNext software on each server. The restricted pairing of server modes into allowed cluster states provides the control for preventing Split Brain Scenario. The HA Manager Subsystem uses communicating daemons on each server to collect the status of the cluster at every decision point in the operation of the cluster. This is another one of the levels of communication used in the HA feature.

An occasional delay in accessing the SAN or its disks might trigger an HA reset while the server and File System Manager (FSM) are otherwise functioning correctly. A LAN communication protocol between the servers' File System Portmapper (FSMPM) processes reduces the chance of a server reset by negotiating the reset of HA timers (patent pending) outside of the ARB-update timer-reset system.

When SAN delays are causing undesirable HA resets, the causes of the delays must be investigated and resolved. Quantum support staff can increase the timer duration as a temporary workaround, but this can negatively impact availability by increasing the time required for some failover instances.

The set of features comprising StorNext HA provides a highly automated system that is easy to set up and operate. The system acts autonomously at each server to continue protection in the event of LAN, SAN, disk and software failures.

The timer mechanism operates at a very basic level of the host operating system kernel, and is highly reliable. Protection against Split Brain Scenario is the primary requirement for HA, and this requires the possibility of some unnecessary system resets. But, when communication channels are working, steps are taken to reduce the

number of unnecessary resets and to eliminate them during administrative procedures.

HA Internals: HAmon Timers and the ARB Protocol

Control of StorNext file system metadata is regulated through the ARB dedicated disk block. The protocol for getting and keeping control of the ARB is meant to prevent simultaneous updates from more than one FSM. The protocol depends on timed updates of the ARB, which is called “branding”.

Loss of control of the timing of branding opens the possibility of metadata corruption through split-brain scenario. The extra protection provided by HAmon timers puts an upper limit on the range of timing for ARB brand updates. Brand updates and HAmon timer resets are synchronized. When branding stops, the timer can run out and trigger an HA reset.

When taking control, an FSM uses the same timer value plus a small amount starting from the last time it read a unique brand. This combination of behaviors provides a fail-safe mechanism for preventing split-brain scenario metadata corruption.

FSM Election, Usurpation and Activation

When a client computer needs to initiate or restore access to a file system, it contacts the nameserver-coordinator system to get a LAN port for the controlling FSM. The nameserver-coordinator system will conduct an election if there is no active FSM or the active FSM is no longer healthy.

This measures the connectivity between the possible server computers and the clients. The nameserver-coordinator system uniquely chooses one standby FSM to take control, and sends an activation command to it. At this point, the cvadmin command will display an asterisk next to the FSM to show that the FSM has been given an activation command.

The elected FSM begins a usurpation process for taking control of the file system metadata. It reads the ARB to learn about the last FSM to control the file system. It then watches to see if the brand is being

updated. If the brand is not being updated or if the usurping FSM has more votes than the current controlling FSM has connections, the usurper writes its own brand in the ARB. The FSM then watches the brand for a period of time to see if another FSM overwrites it. The currently active FSM being usurped, if any, will exit if it reads a brand other than its own (checked before write). If the brand stays, the FSM begins a thread to maintain the brand on a regular period, and then the FSM continues the process of activation.

At this point the usurping FSM has not modified any metadata other than the ARB. This is where the HAmom timer interval has its effect. The FSM waits until the interval period plus a small delta expires. The period began when the FSM branded the ARB. The FSM continues to maintain the brand during the delay so that another FSM cannot usurp before activation has completed. The connection count in the ARB is set to a very high value to block a competing usurpation during the activation process.

When an FSM stops, it attempts to quiesce metadata writes. When successful, it includes an indicator in its final ARB brand that tells the next activating FSM that the file system stopped safely so the wait for the HA timer interval can be skipped.

LAN Connectivity Interruptions

When one MDC loses LAN connectivity, clients lose access to that MDC's active FSMs, which triggers elections to find other FSMs to serve those file systems. StorNext attempts to determine which node should have control, based on connectivity, but this effort results in a tie for the HaShared file system because each node gets one vote from itself as a client. In a tie, the activated shared FSM keeps control so long as it keeps branding its ARB.

Managed FSMs are not redundant, so having clients on those file systems does not break the tie. Similarly, unmanaged FSMs can fail over without an HA reset, so clients on those file systems will not break the tie for the shared file system either.

Therefore, a third client that has the shared file system mounted is necessary to break the tie that occurs between the two nodes. The third client makes it possible to determine which of the MDCs has the best connectivity to the LAN.

Note: The third-party client is not necessary for preventing metadata corruption from split brain syndrome. The ARB plus the HAmon timer to back it up does the whole job of protecting the metadata. For more information about HAmon timer, see the following section.

Autonomous Monitoring and HA Resets

When an HA reset is necessary, it occurs before usurpation could complete. This is true because the start of the timer is based on the last update of the ARB brand for both the active and activating FSMs. Brand updating is the only communication between server computers that is necessary for HA protection against split-brain scenario.

Note that there is no communication from an activating FSM to force an HA reset at its peer server computer. The two servers act autonomously when the ARB branding communication stops. The combination of an HA reset when the brand cannot be maintained and the usurpation-branding protocol guarantees protection from split-brain scenario.

Note: There could be a delay between the autonomous HA reset by the active FSM's server and the election of another FSM to take control. These are not synchronized except by the election protocol.

In the original method of HA resets, known as STONITH, a usurping FSM synchronously reset the peer server at the end of usurpation before modifying any metadata. There was no method for the failing FSM's server to reset itself, so the reset would not happen if the usurping FSM failed to brand the ARB. However, the STONITH method always reset its peer the first time any FSM activated on a server regardless of whether it was needed or not.

Both of these strategies result in some unnecessary system resets where an omniscient system would not reset, but the current HA system has fewer of these resets.

Setting the Timer Value

The HAmon timer interval can be changed to work around delays in the access to ARB because of known behavior of a particular SAN deployment. The feature is meant for temporary use only by Quantum

staff. It affects all the monitored FSMs and could add a significant delay to the activation process. Quantum Software Engineering would like to be notified of any long-term need for a non-default timer interval.

For very long HAmon interval values, there are likely to be re-elections while an activating FSM waits for the time to pass before completing activation. An additional usurpation attempt would fail because the ARB brand is being maintained and the connection count is set to a value that blocks additional usurpation attempts.

The optional configuration of this feature is in the following file:

```
<cvfs root>/config/ha_smith_interval
```

The information at the start of the file is as follows:

```
ha_smith_interval=<integer>
```

The file is read once when StorNext starts. The integer value for the HAmon timer interval is expressed in seconds. The value can range from 3 to 1000, and the default is 5 seconds. The timer must be set identically on both servers. This rule is checked on a server that has standby FSMs when a server that has active FSMs communicates its timer value. When there is a discrepancy, all the FSMs on the receiving end of that communication are stopped and prevented from starting until StorNext has been restarted. This status can be observed with the cvadmin tool in the output of its FSMlist command.

In almost all cases of misconfigured timers, the mistake will be obvious shortly after starting the HA cluster's second server. The first server to start StorNext will activate all of its FSMs. The second server should have only standby FSMs. Once the second server detects the error, all of its FSMs will stop. After this, there will be no standby FSMs, so the cluster is protected against split-brain scenario. In the event that a server with active FSMs resets for any reason, that server will have to reboot and restart StorNext to provide started FSMs to serve the file systems.

Negotiated Timer Resets

When an FSM is healthy but cannot maintain its brand of the ARB because of delays in the SAN or LUN, there is the possibility of an undesirable HA reset. To address this problem there is a LAN-based negotiation protocol between FSMPM processes on the two servers for requesting permission to reset HAmon Timers.

The negotiation is initiated by an FSMPM on a server computer with activated FSMs. Every two seconds it sends a list of active FSMs to its

peer FSMPM on the other server to ask which of these standby FSMs are not being activated. Implicit in the response is a promise not to activate the FSMs for two seconds. When the response is received within one second, the first FSMPM resets the timers for those FSMs for which usurpation is not in progress. Obviously, both server computers must be up and running StorNext for this to function.

This can postpone the impending HA reset for a while, but an election could occur if this goes on too long. It is important to quickly investigate the root cause of SAN or LUN delays and then engineer them out of the system as soon as possible.

Primary and Secondary Server Status

Databases and management data for StorNext Storage Manager or the Linux GUI must also be protected against split-brain scenario corruption. Protection is accomplished by tying the startup of processes that modify this data with the activation of the shared file system.

Activating the shared file system leads to setting a Primary status in the local FSMPM, which is read and displayed by the `snhamgr` command. Primary status and the implicit Secondary status of the peer server are distinct from the Active and Standby status of the individual FSMs on the servers.

Unmanaged file systems can be active on either server. When an HA Cluster has no managed file systems and no shared file system, neither server computer has Primary status—they are equals.

File System Types

HA is turned on by default for all StorNext distributions, but has no effect unless FSMs request to be monitored. File system monitoring is controlled by a file-system configuration item named `HaFsType`. Each file system is one of three types: `HaUnmanaged`, `HaManaged` or `HaShared`. The `HaFsType` value is read by FSMs to direct them to set up appropriate HAmon behaviors, and it is read by the FSMPM to control how it starts FSMs.

HaUnmanaged

Each unmanaged-file-system FSM starts an instance of the HAmon timer for itself when it first brands the ARB. Before it changes any metadata, an activating FSM waits for the timer interval plus a small amount of

time to elapse. The interval for a usurping FSM begins with the last time the FSM reads new data in the ARB from a previously active FSM.

Unmanaged FSMs can be active on either server in the HA Cluster. They can be usurped and fail over without a system reset if they exit before the timer expires. The timer interval for an active FSM restarts with each update of the ARB.

HaManaged

Managed-file-system FSMs do not start HAmon timers, and they do not wait the HAmon interval when usurping. The FSMPMs only start Managed FSMs on the Primary server, so there is no risk of split-brain scenario. In the event that a Managed FSM exits without having been stopped by the FSMPM, it is automatically restarted after a ten-second delay and activated. The `cvadmin` tool's `FSMlist` command displays the blocked FSMs on non-Primary servers. There can be zero or more HaManaged file systems configured.

HaShared

The shared file system is an unmanaged StorNext file system that plays a controlling role in protecting shared resources. It has the same HA behavior as other unmanaged FSMs, but it also sets a flag that triggers an HA reset when the `cvfsioctl` device is closed. This happens when the process exits for any reason. However, if the shared file system has been unmounted from the active server before the FSM exits, the reset-on-close flag gets turned off. This allows ordinary shutdown of CVFS and Linux without resetting the server.

When the HaShared FSM finishes activation, it sets the Primary status in its FSMPM process.

Protected shared data resides on the shared file system. Since only one FSM can activate at one time, the Primary status is able to limit the starting of management processes to a single server, which protects the data against split-brain scenario.

The starting of HaManaged FSMs is also tied to Primary status, which guarantees collocation of the managed file-system FSMs and the management processes. The GUI's data is also shared, and the GUI must be able to manipulate configuration and operational data, which requires that it be collocated with the management processes.

The `ha_peer` and `fsnameservers` File

StorNext HA server software uses peer-to-peer communication between servers and needs to know the peer's IP address. The `fsnameservers` configuration file is not a good source for the address because some installations configure the nameservers outside of the metadata servers. Instead, the following file provides that information:

```
<cvfs root>/config/ha_peer
```

Following are the uses of the peer IP address:

- Negotiating timer resets
- Comparing the HAmon timer value between servers
- HA Manager communications (only on StorNext Storage Manager for Linux)

It is very important to have correct information in the `ha_peer` file, but it is not a requirement that the peer be available for communication. Basic HA functionality operates correctly without IP communication between peers. The file's contents can be changed without restarting StorNext. The new value will be read and used moments after it has changed.

Here are some other points to consider about `fsnameservers`:

- For best practice, the `fsnameservers` file should contain IP addresses, not names.
- All the addresses in the file must be reachable by all members of the StorNext cluster. That is, servers, clients and distributed LAN clients.
- All members of the cluster should have the same nameservers configuration.
- Both or neither of an HA Cluster's MDCs must be included so that a coordinator is always available when either server is running.
- Multiple StorNext Clusters can share coordinators, but every file system name configured on any of the clusters must be unique across all of the clusters.

HA Manager

The HA Manager subsystem collects and reports the operating status of an HA cluster and uses that to control operations. It is part of a Storage Manager installation that has been converted to HA with the `cnvt2ha.sh` script. For manually-configured HA clusters where the

`cnvt2ha.sh` script has not been run, the command-line interface (`snhamgr`) reports a default state that allows non-HA and File System Only HA configurations to operate.

The HA Manager supports non-default HA Cluster functionality such as suspending HA monitoring during administrative tasks. It attempts to communicate with its peer at every decision point, so it is mostly stateless and functions correctly regardless of what transpires between decision points. Following every command, the `snhamgr` command line interface reports the modes and statuses of both servers in the cluster, which provide necessary information for the StorNext control scripts.

HA Manager Modes and Statuses

The HA Manager relies on a set of administrator-settable modes to override the default behaviors of HA. Modes persist across reboots. Following are the modes and descriptions of their purpose:

- 1 default:** HA monitoring is turned on. When the peer server is not available for communication, it is assumed to be in default mode.
- 2 single:** HA monitoring is turned off. The peer server must be communicating and in locked mode, or not communicating and certified as peerdown (recommended). This mode is meant for extended production operations without a redundant server such as when one server is being repaired or replaced. When the peer server is about to be restored to service, the operating server can be transitioned from single to default mode without stopping StorNext.
- 3 config:** HA monitoring is turned off. The peer server must be communicating and in locked mode (recommended), or not communicating and certified as peerdown. The config mode is meant for re-configuration and other non-production service operations. When returning to production service and the default mode, StorNext must be stopped. This ensures that all StorNext processes are started correctly upon returning to default mode.
- 4 locked:** StorNext is stopped and prevented from starting on the local server. This mode allows the HA Manager to actively query the peer server to ensure that it is stopped when the local peer is operating in single or config mode. Communication with the locked node must continue, so this mode is effective when StorNext is stopped for a short period and the node will not be rebooted. If

communication is lost, the peer node assumes this node is in default mode, which is necessary for avoiding split-brain scenario.

- 5 **peerdown**: The peer server is turned off and must not be communicating with the local server's HA Manager subsystem, so this mode is effective when the server is powered down.

The mode is declared by the `peerdown` command on a working server to give information about the non-working peer server. By setting this mode, the administrator certifies the off status of the peer, which the HA Manager cannot verify by itself. This allows the local peer to be in single or config mode. If the peer starts communicating while this mode is set, the setting is immediately erased, the local mode is set to default to restore HA Monitoring, and StorNext is shut down, which can trigger an HA reset.

The `peerdown` mode is changed to default mode with the `peerup` command. The `peerdown` and `peerup` commands must never be automated because they require external knowledge about the peer server's condition and operator awareness of a requirement to keep the peer server turned off.

- 6 **ha_idle_failed_startup**: A previous attempt to start StorNext with `'service cvfs start'` has failed before completion. Attempts to start StorNext are blocked until this status has been cleared by running `'snhamgr clear'`.

The HA Manager subsystem collects server statuses along with the server modes to fully measure the operating condition of the HA Cluster. The possible statuses are as follows:

- **stopped**: Running the `'DSM_control status'` command has returned a false code.
- **running**: Running the `'DSM_control status'` command has returned a true code.
- **primary**: The server's status is running and the FSMPM is in the primary state, which indicates that the HaShared FSM has been activated.

The HA Manager allows the cluster to be in one of the following restricted set of operating states. When a server is in default mode, HA monitoring is turned on.

- **default-default**
- **default-locked**

- **default-peerdown**
- **single-peerdown**
- **single-locked**
- **config-peerdown**
- **config-locked**
- **locked-***

The following states are prohibited and prevented from occurring by the HA Manager, unless there is improper tampering. For example, the last state listed below (peerdown-*), is the case when a node that is designated as peerdown begins communicating with its peer. If any of these is discovered by the HA Manager, it will take action to move the cluster to a valid state, which may trigger an HA reset.

- **single-default**
- **single-single**
- **single-config**
- **config-default**
- **config-single**
- **config-config**
- **peerdown-***

HA Manager Components

The following files and processes are some of the components of the HA Manager Subsystem:

- **snhamgr_daemon**: If the `cnvt2ha.sh` script has been run, this daemon is started after system boot and before StorNext, and immediately attempts to communicate with its peer. It is stopped after StorNext when Linux is shutting down. Otherwise, it should always be running. A watcher process attempts to restart it when it stops abnormally. Its status can be checked with `'service snhamgr status'`. It can be restarted with `'service snhamgr start'` or `'service snhamgr restart'` if it is malfunctioning.
- **snhamgr**: CLI that communicates with the daemon to deliver commands and report status, or to report a default status when the

`cnvt2ha.sh` script has not been run. This is the interface for StorNext control scripts to regulate component starts.

- `/usr/cvfs/install/.ha_mgr`: Stored mode value, which allows the single, config, locked, and peerdown modes to persist across reboots.
- `SNSM_HA_CONFIGURED`: Environment variable that points to a touch file to indicate that `cnvt2ha.sh` has been run.
- `/etc/init.d/snhamgr`: Service control script for starting the `snhamgr_daemon`.
- `HA_IDLE_FAILED_STARTUP`: Environment variable that points to a touch file to indicate that a previous run of `'service cvfs start'` failed before completion. This blocks startup attempts to prevent infinitely looping startup attempts.
- `/usr/cvfs/debug/smithlog`: When an HA Reset is imminent, a descriptive line is added to the end of this file and the file is `fsync'd` in an attempt to ensure that the information is available for debugging the root cause of the reset. For example, when there is less than one second remaining on the HA Monitor timer, a notice is written in this file. It is likely that all other log files will lose some of the newest information at the time of the reset because it is in buffers that have not been written to disk. The `fsmppm` process writes the file, so the file may not have any diagnostic information in cases where the `fsmppm` itself fails and causes an HA reset.

HA Manager Operation

In addition to the setting of modes, there are some commands provided by the HA Manager to simplify and automate the operation of an HA Cluster.

- 1 **status**: Report cluster status. All commands report cluster status on completion. This command does nothing else unless an invalid cluster state is detected, in which case it will take steps to correct the cluster state.
- 2 **stop**: Transition the non-Primary server to locked mode, which will stop StorNext if it is running. Then transition the Primary server to config mode, which will turn off HA monitoring. Stop StorNext on the Primary server. Finally, transition both servers to default mode.

- 3 start:** If either MDC is in config or single mode, transition it to default mode (CVFS stops when transitioning from config mode). If either MDC is in locked mode, transition it to default mode. If the remote MDC is in peerdown mode, then run `peerup`. If the local MDC is stopped, run `'service cvfs start'`. If the remote MDC is accessible and in stopped status, run `'service cvfs start'` on the remote MDC.

Note: Running `service cvfs start` is the preferred method of starting, so Quantum recommends using this command rather than using other methods. Likewise, use `service cvfs stop` to stop StorNext.

- 4 config:** Transition the peer server to locked mode, then transition the local server to config mode. This command must be run on the Primary server or either server when both servers are stopped.
- 5 clear:** Erase the `HA_IDLE_FAILED_STARTUP` touch file. This should be used after correcting the condition that caused the failure of the `'service cvfs start'` command.
- 6 --primary:** Set the Primary status in the FSMPPM on the local server. This is exclusively for use by system scripts. Improper use of this command will violate HA protection rules and could result in split-brain scenario.
- 7 force smith:** Trigger an immediate HA reset. This is primarily for use by system scripts.

Configuration and Conversion to HA

The following types of StorNext configurations can be run as HA Cluster servers:

1 Windows

The StorNext GUI has a menu item for configuring HA: **Tools > High Availability > Convert**. It automatically inserts the `haFsType HaUnmanaged` configuration item in every file system configuration, and restarts the FSMs to enable HA. This menu item must be selected separately on each server. It is the operator's responsibility

to ensure that HA is running on both servers; there are no built-in tests to ensure that this has been done. The `ha_peer` file must be created manually to contain the IP address of the peer MDC, which is used for negotiated restarts of HA timers to avoid unnecessary HA resets.

For information about using the Convert menu option, see the StorNext online help or refer to the *StorNext HA Quick Reference*.

2 Linux SNFS without GUI support

Each FSM configuration file must be given the `haFsType HaUnmanaged` configuration item, and the `ha_peer` file must be given the numerical IP address of its peer, which is used for negotiated restarts of HA timers to avoid unnecessary HA resets.

The FSM configuration files and `fsnameservers` files must be identical on both servers. When these things are done correctly, HA Monitoring is protecting the metadata against split-brain scenario. It is on by default; there is no means for turning it off other than removing the `haFsType` item from the FSM configuration files.

3 Linux Storage Manager with only unmanaged file systems

See [Conversion to HA](#) for more information.

4 Linux Storage Manager with managed and unmanaged file systems

See [Conversion to HA](#) for more information.

Conversion to HA

This section describes what happens in the conversion script.

When a StorNext Storage Manager single-server configuration has been completed, the node is converted to HA by running the `/usr/adic/util/cnvt2ha.sh` script.

Before running the script, add the `haFsType` configuration item to each file system according to its type (`HaUnmanaged`, `HaManaged` or `HaShared`), and enter the peer MDC's IP address in the `/usr/cvfs/config/ha_peer` file.

This script expects there to be one and only one unmanaged file system that is configured with the `haFsType HaShared` configuration item. It also expects the `/usr/cvfs/config/license.dat` file to include licenses for both the configured server and its unconfigured redundant

peer. The configured server is running StorNext when the `cnvt2ha.sh` script is run, so it becomes the Primary on completion of the script. (The StorNext GUI, if used to drive the conversion to HA, creates the mergedfile before converting the secondary.)

The following command is invoked to start the conversion process:

```
/usr/adic/util/cnvt2ha.sh primary
```

Output for the operation is displayed to the screen and saved to the `/usr/adic/HA/cnvt2ha.sh.log` file.

The script automatically finds the shared file system by its `haFsType` configuration item and moves its mount point to `/usr/adic/HAM/shared`. It relocates several hundred configuration and database files for Storage Manager to the `/usr/adic/HAM/shared` directory. SNFS configuration items are copied from the `/usr/cvfs/config` directory to the mirror subdirectory of the shared file system. Finally, it creates the following touch file to indicate that conversion has completed:

```
/usr/adic/install/.snm_ha_configured
```

The existence of that file enables the running of the `snhamgr` service, which starts the HA Manager daemon.

Before the conversion script is run on the secondary, the following file must be copied from the Primary:

```
/usr/cvfs/config/fsnameservers
```

The arguments to the conversion command for the secondary server are as follows:

```
/usr/adic/util/cnvt2ha.sh secondary <sharedfs name>  
<peer IP address>
```

This gives the redundant peer server enough information to access the shared file system as a client. It then copies the mirrored configuration files into its own configuration directory and sets up the `ha_peer` file. The database and management-components configuration files are rerouted to the `/usr/adic/HAM/shared` shared file system mount point. Finally, the `.snm_ha_configured` touch file is created, and StorNext is restarted.

SyncHA process

Before the shared file system is up, some configuration files must be available. These are initially “mirrored” to the secondary server by the

cnvt2ha.sh script, and then maintained across the two server computers by the syncHA process, which is run once per minute from cron.

On the Primary, the command stat's the mirrored files to see what has changed, and copies these out to the /usr/adic/HAM/shared/mirror folder. On the secondary server, the files that have changed are copied in. The list of mirrored files is defined in the /usr/cvfs/config/filelist and /usr/adic/gui/config/filelist tables as follows.

In the /usr/cvfs/config directory:

- license.dat
- fsmlist
- fsnameservers
- fsroutes
- fsports
- *.cfg
- *.cfgx
- *.opt
- nss_ctl.xml
- snpolicyd.conf
- blockpool_settings.txt
- blockpool_root
- blockpool_config.tpl
- blockpool_config.txt
- bp_settings

In the usr/adic/gui directory:

- database/derby_backup.tar
- logs/jobs/*
- config/host_port.conf


Note: By default, the syncha process backs up the internal state of the StorNext GUI every minute, which may cause a performance impact to some GUI operations. The file `/usr/adic/gui/config/syncha_interval.conf` can be used to reduce the frequency of the GUI state backups. The contents of the file, if present, should contain an integer value that specifies the minimum number of seconds between GUI state backups. This file is host dependant and applies only to syncha when it is run in cron mode on the primary system.

Managing High Availability in the StorNext GUI

The StorNext Tools menu's **High Availability > Manage** option enables you to view the current status of the file systems on your High Availability (HA) system. Specifically, you can view the primary and secondary node FSM statuses: Active, Standby, or Unknown.

The Manage option is accessible by choosing **High Availability > Manage** from the Tools menu. The **High Availability Manage** screen appears.

Figure 126 High Availability
Manage Screen

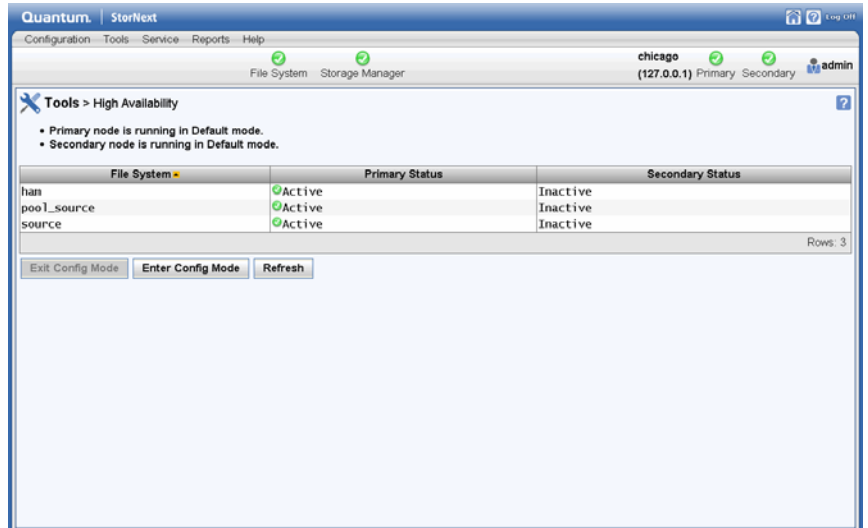

The Manage option also enables you to perform the following HA-related actions:

Enter Config Mode: Sets the peer (secondary) node to locked mode and sets the local (primary) node to config mode for administration purposes. The locked mode stops CVFS on the peer, and is designed for automated short-duration stops of the secondary server to make configuration changes and other modifications. This allows the HA Manager to prevent HA resets while making configuration changes or stopping the primary server.

Note: In the event that TCP communication to the secondary server is lost for any reason, the primary server assumes the secondary server is in default mode and transitions the local server out of config mode. For this reason, the locked mode is not appropriate to use for extended secondary-server outages, activities that might include reboots of the secondary server, etc. Best practice is to use Peerdown mode when a server is turned off for an extended period, or to simply keep the primary server in default mode while the secondary server is brought in and out of service in short durations.

- 1 Click **Enter Config Mode**.
- 2 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 3 Click **OK** when a message informs you that the cluster was locked.

Exit Config Mode: Starts both nodes of the HA cluster in default mode.

- 1 Click **Exit Config Mode**.
- 2 When the confirmation message appears, click **Yes** to proceed or **No** to abort.
- 3 Click **OK** when a message informs you that the cluster was unlocked.

High Availability Operation

Most of the information in this section is in regard to GUI-supported configurations of StorNext on Linux servers; that is, those installations having an HaShared FSM. There is very little difference for File System-

only installations on Windows or Linux in administrating redundant HA versus non-HA servers.

The supported method for starting StorNext on Linux is the 'service cvfs start' command. This is the method used automatically by Linux when the system enters multi-user mode. The script sets up a failure-detection method that prevents looping starts as described in [HA Manager Components](#) on page 321.

StorNext is automatically started as a service on Windows. If StorNext is started more than once in a three-minute period, StorNext operation is delayed for three minutes. This would allow an administrator to login and stop an infinite cycle of HA resets at startup.

StorNext Server for Windows includes the Advanced File System Configuration tool that automates the configuration of the HaFsType parameter. Ensure that both servers have HA enabled when redundant servers are operating. The ha_peer file must be manually configured.

Note: The spelling is haFsType for XML configuration, and HaFsType for the old .cfg configuration methods. Windows uses the .cfg method exclusively. Linux uses XML exclusively for the StorNext GUI, but the .cfg method is still supported for by-hand configuration.

Windows and Linux SNFS Installations Without the HaShared File System

HA monitoring is turned on by default when FSM configurations include the HaFsType configuration parameter. There is no need to disable HA in almost all cases. The only mechanism for turning it off is to remove the configuration parameter, but this should be done only after the redundant server has been turned off.

Note: Instances of redundant StorNext servers without HA are not supported.

The ha_peer and optional ha_smith_interval files are the only additional configuration items for instances of HA without an HaShared file system. These items must be manually configured. FSM-configuration and FSMList files must be identical on both servers.

When stopping StorNext on one of these servers, all FSMs will stop. Standby FSMs on the redundant server will activate and resume serving

their file systems. No HA reset will occur if every stopping FSM exits before their HAmon timer expires (after the final ARB brand update).

During operation, individual file systems could potentially fail over between servers as the result of a hardware or software failure or because an operator has directed it by the `fail` command in the `cvadmin` tool. The `fail` command can be used for load balancing after the HA cluster has completed startup.

When making file system configuration changes, one of the servers should be stopped and its FSM configurations deleted. This eliminates the possible mistake of asymmetric configurations. After making all the configuration changes on one server and updating the file systems with those new configurations, the configuration files must be copied to the redundant server. Then, the cluster can be operated with redundant servers again.

When updating StorNext software, refer to the release notes and the StorNext Upgrade Guide for current update instructions. These documents address any special considerations for HA according to the scope of the changes in the software release.

Linux SNMS and SNFS Installations with the HaShared File System

The HaShared file system is required for SNMS and GUI-supported installations. The shared file system holds operational information for those components, which must be protected against split-brain corruption. The additional complexity this entails is simplified and automated by the HA Manager Subsystem.

Touch Files that Control StorNext and HA

Environment variables defined in the `/usr/adic/.profile` and `/usr/adic/.cshrc` files reference touch files that are used in StorNext to track state transitions. Some of these are unique to HA configurations. The variables and their values are as follows:

- 1 `ACTIVE_SNFS_SERVER=/usr/adic/install/.active_snfs_server`

The file is created following activation of the HaShared file system to designate the local node as the Primary server.

- 2 `HA_STARTING_UP=/usr/cvfs/install/.ha_starting_up`

The file is created at the start of the 'service cvfs start' script, and removed at the end of the activation script for the HaShared file system. If it is found before it is created, that causes the creation of the HA_IDLE_FAILED_STARTUP file as described in the next item.

- 3 HA_IDLE_FAILED_STARTUP=/usr/cvfs/install/.ha_idle_failed_startup

When the HA_STARTING_UP file exists as the 'service cvfs start' starts, it is assumed that the previous attempt to start failed before completing, possibly because an HA reset occurred. The HA_IDLE_FAILED_STARTUP file is created to block future attempts to start, and the current script exits. This avoids an infinitely looping series of startup attempts, and allows an administrator to log in and correct problems. The HA Manager reports the existence of this file as a mode, and offers the clear command for removing the file.

- 4 SNSM_HA_CONFIGURED=/usr/adic/install/.snsm_ha_configured

The file is created by the cnvt2ha.sh script to indicate that the system has been converted to HA. Its existence allows the snhamgr_daemon to run.

- 5 START_SNFS_ONLY=/usr/adic/install/.start_snfs_only

The file is created by running one of the following commands: '/usr/adic/bin/adic_control startonly snfs' or '/usr/cvfs/bin/DSM_control startonly'.

Its existence indicates to the snactivated script that Storage Manager components are not to be started. The file is removed by using any of the following commands: 'DSM_control stop', 'service cvfs stop', or 'adic_control stop snfs'.

Starting a Single StorNext HA Server for Production

The 'service cvfs start' command sets in motion a sequence of events that result in the starting of all the Storage Manager components.

Note: The individual Storage Manager component scripts should not be run by hand. There are safeguards in the control scripts to preserve the HA protections against split-brain scenario in any case, but StorNext can get into certain states that are tricky to reconcile if component scripts are used in the wrong sequence. The shared file system can make that reconciliation more difficult.

The `cvfs` script (indirectly) starts the `DSM_control` script, which starts the `FSMPM`, waits for it, and then repeatedly attempts to mount all of the `cvfs` type file systems. The `FSMPM` reads the `FSM` configuration files and the `fsmlist` file. It starts the `HaShared` and `HaUnmanaged` `FSMs` in the `fsmlist`, but delays starting the `HaManaged` `FSMs`. The sub state of the delayed `FSMs` can be displayed with the `fsmlist` command in the `cvadmin` tool. Meanwhile, the mounts taking place because of the action of `DSM_control` are triggering elections that are activating the locally started `FSMs` if they are not already being serviced by active `FSMs` on the peer server.

When an `FSM` completes activation, it runs the `snactivated` script. The script for the `HaShared` file system creates the `ACTIVE_SNFS_SERVER` file, and then calls `'snhamgr --primary'` to set the Primary status for this server. That induces the `FSMPM` to start the `HaManaged` `FSMs`. The `HaShared` activation script waits a limited time for all of the managed file systems to be mounted, and then it calls `'adic control start'` to start the other Storage Manager components. Finally, the `HaShared` activation script removes the `startup-failure-detection` touch file.

While all this is happening, the `DSM_control` script is monitoring progress and reporting statuses of the mounts and the component startups. It will wait a limited time for completion. When it finishes and exits all the nested scripts and returns to the user, all of the Storage Manager components should be up. But if it times out before that, the background activities should continue bringing up Storage Manager. The results of this can be observed a few moments later.

Starting and Stopping the StorNext HA Cluster

When starting or stopping StorNext HA, it is always helpful to first get the cluster state from the HA Manager as follows:

```
snhamgr status
```

The status output indicates whether one or both servers are stopped, if they are in non-default modes, and if either server has Primary status. The typical first step in stopping an HA cluster is to stop the secondary server and to lock it. This allows the other server to be put in config or single mode to operate with HA monitoring turned off. Then, that server can be stopped without incurring an HA reset. These steps are automated in the following cluster command:

```
snhamgr stop
```

When starting the cluster into production, both servers must be in default mode. The first server to start is likely to have its HaShared FSM activated, which will result in that server becoming Primary. The redundant server becomes Secondary when it starts operation, and its FSM processes wait in Standby until they are elected to usurp control of their file systems. These steps are automated in the following cluster command, which starts the local server, if necessary, to become Primary, followed by starting the Secondary server:

```
snhamgr start
```

StorNext HA also has the ability to stop a Primary server while it is in default mode without incurring an HA reset in most cases. It does this as follows:

- 1 Stop Storage Manager processes, including the database
- 2 Unmount all CVFS file systems on the local server other than the HaShared file system
- 3 Stop all FSMs on the local server other than the HaShared FSM
- 4 Unmount the HaShared file system
- 5 Stop the FSMPPM
- 6 Stop the HaShared FSM

FSMs are elected and activate on the peer server as they are stopped on the local server.

An HA reset can occur if step 4 fails. (That is, if the HaShared file system cannot be unmounted for any reason.) This is the method for protecting Storage Manager management data against split-brain-scenario corruption. All of the at-risk data is contained on the shared file system, so the unmount operation ensures that the local server cannot modify the data.

Upgrading and Changing Configuration

Whenever configuration or software changes are made, a StorNext HA cluster may need to be downgraded to one server with HA disabled. This avoids the possibility of an HA reset being induced by the arbitrary starts and stops of FSMs and other components as changes are made.

After changes have been made on one server, mirrored configuration items must be copied to the peer server. Examples include the following files:

- /usr/cvfs/config/*.cfgx
- /usr/cvfs/config/FSMlist
- /usr/cvfs/config/fsnameservers
- /etc/fstab

Production Single-Server Operation

During extended outages of one server, it might not be productive to incur an HA reset since there is no standby FSM to fail over to. However, reconfiguring the remaining server to non-HA mode is not practical. The single mode solves this dilemma.

Single mode can be entered from default mode, and default mode can be entered from single mode without stopping StorNext. This makes it easy to decommission and replace a failed server. Here are the steps for doing this:

- 1 Power down the decommissioning server (if necessary)
- 2 On the working server, run the following two commands in order:

```
snhamgr peerdown  
snhamgr mode=single
```
- 3 Replace the decommissioned server
- 4 Acquire licenses for the new server
- 5 Replace those license file entries on the working server
- 6 Install StorNext on the new server, but do not configure it except for copying in the /usr/cvfs/config/fsnameservers file from the working server
- 7 On the working server, run the following two commands in order:

```
snhamgr mode=default
```

```
snhamgr peerup
```

8 Run the conversion script on the new server as follows:

```
/usr/adic/util/cnvt2ha.sh secondary <shared fs>  
<peer IP addr>
```

Non-production Operation

There is a method for starting the SNFS file systems without starting the Storage Manager management components in the rare case that this is needed. The following two commands accomplish the same goal:

- `adic_control startonly snfs`
- `DSM_control startonly`

These commands create the `/usr/adic/install/start_snfs_only` touch file, which signals to the `snactivated.pl` script not to start the management components. The file exists until StorNext is stopped, and has its effect whenever the FSMs activate.

HA Resets

After a suspected HA Reset, the first place to look is the `/usr/cvfs/debug/smithlog` file, which contains one-line time-stamped descriptions of probable causes for the reset.

There are three methods for producing an HA Reset:

- 1 Expiration of an HA Monitor timer
- 2 Exit of the active HaShared FSM while the shared file system is mounted on the active MDC
- 3 Invocation of the `'snhamgr force smith'` command by a script or manually by an administrator. The `smithlog` file is written by the `fsmppm` process, so there would not be an entry in the file when an `fsmppm` exit results in an HA Reset.

HA Resets of the First Kind

The first method of an HA Reset is explained by the following description of the FSM monitoring algorithm (patent pending). The terms *usurp* and *usurpation* refer to the process of taking control of a file system, either with or without contention. It involves the branding of the arbitration block on the metadata disk to take control, and then the timed rebranding of the block to maintain control. The HA Monitor algorithm places an upper bound on the timing of the ARB branding protocol to prevent two FSMs from simultaneously attempting to control the metadata, even for an instant.

- When an activating HaUnmanaged or HaShared FSM usurps the ARB, create a five-second timer that resets the computer if it expires
- Wait five seconds plus a small delta before completing usurpation
- Immediately after every ARB Brand update (.5 second period), reset the timer
- Delete the timer when the FSM exits

When there is a SAN, LUN, or FSM process failure that delays updates of the ARB, the HA Monitor timer can run out. When it is less than one second from expiring, a one-line message describing this is written to the `/usr/cvfs/debug/smithlog` file.

If SAN or LUN delays are suspected of occurring with regular frequency, the following test can be run. This will significantly impact performance.

- Increase the timer value (up to 999 seconds) by creating the `/usr/cvfs/config/ha_smith_interval` file on each MDC with only this line: `'ha_smith_interval=<integer>'`. This will allow the delays to run their course without incurring a reset. The value must match on both MDCs.
- Turn on debugging traces with `'cvdbset :ha'`
- Display debugging traces with `'cvdb -g -C -D 500'`
- Look for the lines like this example `'HAMonCheck PID ##### FS "testfs" status delay = 1'`
- When the value grows is more than 1, there are abnormal delays occurring. When a standby FSM is running and the LAN is working, the negotiated timer resets should limit the growth of this value to four. When the value reaches two times the `ha_smith_interval` (default of $5 * 2 = 10$), an HA Reset occurs.
- Turn off tracing with `'cvdbset - all'`

HA Resets of the Second Kind

The second method of HA Reset can occur on shutdown of CVFS if there is an unkillable process or delayed process exit under the HaShared file system mount point. This will keep the file system from being unmounted. The smithlog entry indicates when this has happened, but does not identify the process.

HA Resets of the Third Kind

The third method of HA Reset is the most common. It occurs when the snactivated script for the HaShared FSM experiences an error during startup. The current implementation invokes the 'snhamgr force smith' command to allow the peer MDC an opportunity to start up StorNext if it can. A similar strategy was used in previous releases. In this release, the failure to start will cause the /usr/cvfs/install/.ha_idle_failed_startup touch file to be created, and this will prevent startup of CVFS on this MDC until the file is erased with the 'snhamgr clear' command.

Using HA Manager Modes

The snhamgr rules for mode pairings are easier to understand by following a BAAB strategy for transitioning into and out of config or single mode. In this strategy, B stands for the redundant node, and A stands for the node to be placed into config or single mode. Enter the desired cluster state by transitioning B's mode first, then A's. Reverse this when exiting the cluster state by transitioning A's mode, then B's.

For the configuration-session example, place B in locked mode, then place A in config mode to start a configuration session. At the end of the session, place A in default mode, then place B in default mode.

For the single-server cluster example, shut down Linux and power off B, then designate it peerdown with the 'snhamgr peerdown' command on A, then place A in single mode. At the end of the session, place A in default mode, then designate B as up with the 'snhamgr peerup' command on A, then power on B.

HA Tracing and Log Files

The following log files contain HA related debugging information:

- `/usr/cvfs/debug/ha_mgr.out`
Log messages from the `snhamgr_daemon`
- `/usr/cvfs/debug/hamgr_cmds_trace`
Output from commands run by the `snhamgr_daemon`. Typically, several commands are run simultaneously. Their output becomes intertwined. This is normal.
- `/usr/cvfs/debug/snactivated.<fs name>.log`
Output from the `snactivated.pl` command per file system.
- `/usr/cvfs/debug/nssdbg.out`
Log messages from the `FSMPM` daemon. HA related messages include: the `HAMon` timer interval, anomalies in negotiations for the resetting of `HAMon` timers, setting of Primary status, activations of `FSMs` etc.
- `/usr/cvfs/data/<fs name>/log/cvlog`
Log messages from `FSM` processes. HA related messages include: the last write of the `ARB` after quiescing the metadata writes, waiting the HA interval after branding the `ARB`, launching of the `snactivated` script etc.
- `/usr/adic/HA/cnvt2ha.sh.log`
Output of the `cnvt2ha.sh` script.
- `/var/log/messages`
Mounts of `cvfs` file systems.
- `/usr/cvfs/debug/smithlog`
When an HA Reset is imminent, a descriptive line is added to the end of this file and the file is sync'd to ensure that the information is available for debugging the root cause of the reset. For example, when there is less than one second remaining on the HA Monitor timer, a notice is written in this file. It is likely that all other log files

will lose some of the newest information at the time of the reset because it is in buffers that have not been written to disk.

Single (Singleton) Mode

Single mode (also known as Singleton mode) allows for extended operation without the risk of incurring an HA Reset. In this state HA is disabled, but with the possibility of reduced availability because the redundant server is missing. Use of the “snhamgr force smith” command produces an error message, and the server continues to run. This and other instances where an HA reset would have occurred under Default mode are still logged in the /usr/cvfs/debug/smithlog diagnostic file.

In Single mode the Secondary must be either “Offline” (peerdown) or “Locked”. When in peerdown mode, the Secondary is truly incommunicado. When locked, Web services are still running on the Secondary.

There is no way in the StorNext GUI to go directly from Singleton/Locked to Default/Default, but it is possible to “Enter Config Mode” and then “Exit Config Mode” to get to Default/Default.

When in Singleton/Peerdown, the “Enter Config Mode” and “Exit Config Mode” sequence transitions the cluster as follows: Single/Peerdown -> Config/Peerdown -> Single/Peerdown.

Between the initial conversions of the Primary and Secondary servers, the GUI sets the cluster to Single/Peerdown. Quantum recommends that conversions be done one right after the other; there is no benefit to remaining in this half-converted state for any length of time. If the Secondary must be replaced (or when it is uninstalled during an upgrade), the StorNext GUI leaves the cluster in Default/Default (Unknown) state.

When leaving Config or Single mode to return to the Default/Default state, it is a best practice to have the same server be the Primary before and after the transition. This allows any configuration changes to be transferred to the Secondary before it activates any FSMs.

FSM failover in HA Environments

When a failover of any file system occurs, the new FSM notices if any clients had a file exclusively opened for writes, and waits up to 35 seconds for those clients to reconnect. In the case of an HA Reset of the Primary MDC, that MDC is not going to reconnect, so the failover to FSMs on the Secondary MDC and the promotion of that MDC to Primary status can be delayed by 35 seconds.


The StorNext system exclusively opens files on the HaShared file system, but assumes that only the Primary MDC does this and waives the delay for that one file system. Quantum advises against running user processes other than StorNext processes on HA MDCs for performance, reliability and availability reasons. In the event that processes running on the Primary MDC have files exclusively open for writes on other file systems, the availability of those file systems to all clients will be delayed by 35 seconds following an HA Reset event.

Failover Timing

The following illustration shows approximate timings of the FSM failover in an HA cluster. The numbers in the notes correspond to the numbers in the illustration.

In this description, both MDCs in an HA Cluster are fully started and the Secondary MDC is ready to assume the Primary role if needed. At time T0, an HA Reset of the Primary occurs.

Figure 127 FSM Failover in an HA Cluster

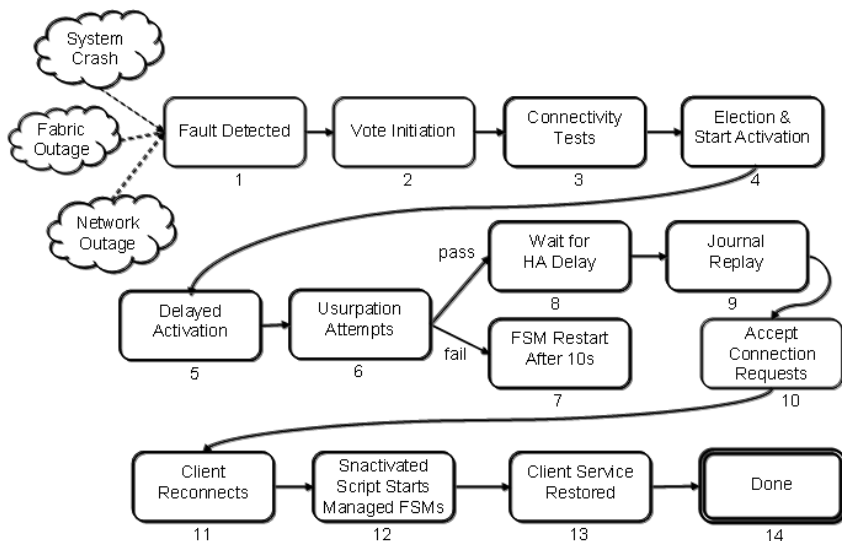

Not shown in this diagram are the state transitions of the peer MDC when it incurs an HA Reset. The HA Reset is not directly tied to the failover of control to a standby FSM, but rather the detection of a loss of services triggers failovers. The HA Reset may come before or after the loss of services, or not at all. It is only important to know that by the end of state 8, no FSM on the peer MDC is controlling the arbitration block (ARB). The HA Reset mechanism guarantees that to be true.

The example failures shown here (System Crash, Fabric Outage, Network Outage) can result in a failover. Typically, the loss of heartbeat from the peer MDC's FSMPPM is the first indication that an HA Reset has occurred.

- 1 **Triggering Event:** The loss of heartbeat is detected and triggers an election at approximate time T3.5 seconds. Note that failover of a single unmanaged file system could also be forced with the `cvadmin` command without causing an HA Reset.
- 2 **Vote Initiation:** A quorum-vote election is started where the clients of the file system identify the best-connected MDC having a standby FSM for the file system.
- 3 **Connectivity Tests:** Each live client runs a connectivity test sequence to each server. Connections are tested in less than .5

seconds per server, when successful, and can be repeated up to four times (two seconds) when unsuccessful. At completion of the election, the time is approximately T5.5.

- 4 **Election and Start Activation:** The election is completed, and an activation message is sent to one server's standby FSM.
- 5 **Delayed Activation:** When a server has active FSMs, its FSMPM process sends a request to the FSMPM of its peer server to ask if the corresponding Standby FSMs are being activated. If not, the local FSMPM can reset the HA timer of that file system's active FSM, which reduces the chance of an unnecessary HA Reset. When the peer FSMPM gives permission, it is constrained from activating the standby FSM for two seconds. Step 5 is for that delay of up to two seconds. The delay completes at approximately T6.5.
- 6 **Usurpation Attempts:** To prevent false takeovers, the ARB is polled to determine whether another FSM is active and must be "usurped". Usurpation is averted if the activating FSM detects activity in the ARB and its vote count does not exceed the active FSM's client-connection count. A typical successful poll after an HA Reset lasts two seconds. When the previously active FSM exits gracefully, the usurpation takes one second.

The activating FSM then performs a sequence of I/Os to "brand" the arbitration block to signal takeover to the peer FSM. An active FSM is required to exit when it sees that its brand has been overwritten. These operations take two seconds. The HAmom timer is started at this point if the HaFsType is HaShared or HaUnmanaged. This step completes at approximately T9.5.

- 7 **FSM Restart:** After five failed attempts to usurp control, an activating FSM exits. The fsmrpm restarts a standby FSM ten seconds later.
- 8 **Wait for HA Delay:** When an active FSM is configured for HA Monitoring (HaShared or HaUnmanaged), and the ARB brand is not maintained for more than the HA Timer Interval (five seconds by default), the FSM's server computer is reset. After an activating FSM writes its brand, it waits one second longer than the HA Timer while monitoring its brand (HA Delay = six seconds by default), to be certain that the formerly active FSM has not resumed control of the ARB. The delay completes at approximately T13.5.
- 9 **Journal Replay:** Any outstanding journal entries are replayed in order to achieve consistent metadata state. The time required for

this step can vary due to several factors, but typically completes within seconds. A possible time for completion of this step is T18.5.

- 10 **Accept Connection Requests:** The FSM begins to listen for client (re)connects. It waits up to 35 seconds for reconnections from any clients that have files open exclusively for writing, but this delay does not apply to the formerly active FSM's server computer. Approximate time at completion of this step is T20.5.
- 11 **Client Reconnects:** The FSM begins servicing reconnects from the live clients. The clients perform a sequence of attribute state synchronization to ensure consistency with the server. Approximate time at completion of this step is T22.5.
- 12 **Start Managed FSMs:** When the HaShared FSM reaches this step, it sets the Primary status for the server, which signals the FSMPPM to start the HaManaged FSMs. Those FSMs then proceed through steps 1 through 14, but without the initial 3.5 second delay in step 1, and without the delay in step 8, since they are not HA Monitored. Activation of the HaManaged file systems can complete in seconds, completing at approximately T27.5.
- 13 **Client Service Restored:** The clients reinitiate any outstanding RPCs to the server and restore full service to the applications. This runs in parallel with starting HaManaged FSMs.
- 14 **Done:** At this point, processes on clients can create, read, write etc. files in StorNext file systems unless Storage Manager Services are needed. In that case there can be a delay of several minutes as those services are restarted before certain file system operations can be completed.
- 15 The approximate time of 27.5 seconds to complete a failover is variable and could take less or significantly more time.

It is important to note that an HA Reset is possible on the Secondary server if an HaUnmanaged FSM is active there and fails to maintain its brand on the ARB within the timing constraints of the HA system.

The following table presents common timing estimates for failover of all file systems following an HA Reset of the Primary server. Actual performance will vary according to: differences in configurations; file system activities in progress at the time of failover; CPU, SAN and LAN loads, latency and health; and the nature of the conditions that caused the failover. The optimal estimates are for a forced failover at the command line of a single unmanaged file system without an HA Reset.

	Failover Timing Estimates (secs)	
	Optimal	Common
State		
1	0	3.5
2	0	0
3	0.5	2
4	0	0
5	0	1
6	3	3
7	n/a	n/a
8	0	4
9	1	5
10	0.5	2
11	0.5	2
12	0	5
13	0	2
14	n/a	n/a
Total	5.5	27.5

Replacing an HA System

This section describes how to replace an HA server. Before beginning this procedure make sure you have obtained the proper licenses required for the new HA MDC.

Note: This procedure requires a certain level of technical expertise. Do not attempt performing this procedure unless you are confident you can complete the steps successfully.

If you are unsure about your ability to complete these steps, contact the Quantum Technical Assistance Center for help.

Pre-Conversion Steps

- 1 If both HA MDCs are currently up and running, make sure the system you want to replace is designated as the secondary MDC. This can be accomplished by running `service cvfs stop` on the designated machine.
- 2 Run a manual backup to tape from the StorNext GUI.
- 3 Make sure all store/retrieve requests have finished.
- 4 If you are using the Distributed Data Mover (DDM) feature, note the value of the `DISTRIBUTED_MOVING` parameter (either `All` or `Threshold`) in `/usr/adic/TSM/config/fs_sysparm` (or `fs_sysparm_override`).

Use a text editor to set the `DISTRIBUTED_MOVING` value to `None`. Use the `adic_control restart TSM` command to put this change into effect.
- 5 Unmount all file systems from all clients, and then stop the SNFS processes on each client machine. (On the Linux platform, do this by running `service cvfs stop`).
- 6 Uninstall StorNext from the secondary server, but retain the log files. Do this by running the command `install.stornext -remove`.
- 7 Power down the uninstalled secondary server.

Conversion Steps

- 1 Set the primary node to "Config" mode and the peer node to "Peerdown" mode by running the following commands:

```
snhamgr peerdown  
snhamgr mode=config
```
- 2 Check the StorNext HA Manager (snhamgr) status by running the command `snhamgr status`. The status should look similar to this:

```
LocalMode=config  
LocalStatus=primary  
RemoteMode=peerdown  
RemoteStatus=unknown
```

- 3 Change the `/usr/cvfs/config/ha_peer` file on the primary MDC to the new MDC IP address.
- 4 If the `/usr/cvfs/config/fsnameserver` file includes the old MDC IP address, replace it with the new MDC IP address on the primary MDC and all the clients.
- 5 In the primary MDC's `/usr/cvfs/config/license.dat` file, remove all the old MDC licenses by commenting out the lines you want removed. Keep only the primary MDC licenses.
- 6 Push those changes to the synchronization mirror directory by running this command: `/usr/adic/util/syncha.sh -primary`
- 7 Install StorNext 4.0.0 build on the NEW secondary server by running this command: `install.stornext`
- 8 Put the new licenses on the NEW secondary servers into `/usr/cvfs/config/license.dat`. The StorNext GUI can be run on the secondary to enter the licenses.

Note: You must restart the StorNext GUI after you create or edit the `license.dat` file.

- 9 In the StorNext GUI, go to the **Tools > High Availability > Convert** screen and convert the secondary MDC to HA.

Post-Conversion Steps

- 1 After the conversion is complete, check the `snhamgr` status on both MDCs. Run the `cvadmin` command to verify that all file systems are listed correctly.
- 2 Perform a system backup by running the `snbackup` command. This process may take substantial time depending on the number of managed files in the system.
- 3 Start and mount StorNext file systems on the clients, and then verify that all clients have full access
- 4 Conduct a failover to confirm that the secondary MDC has converted correctly. Confirm this by testing access to all file systems, moving files to/from tapes, and reviewing GUI configuration information.
- 5 If you conducted a failover to the secondary server, fail back to the original primary server.

- 6 Verify that all clients still have full access.
- 7 If you are using the DDM feature and if you use the secondary server as a DDM mover, make sure the file systems are mounted.
- 8 If you are using DDM, edit `fs_sysparm` or `fs_sysparm_override` to use your preferred DDM mode, (All or Threshold).

Use the command `adic_control restart TSM` to put this change into effect.



Appendix D

Web Services API

Beginning with StorNext 4.0, a Web Services version of StorNext API (WS-API) is installed along with the StorNext 4.0 Linux GUI binary, which is installed by default.

WS-API provides basic control over StorNext Storage Manager systems to track media and drives and to store/truncate/retrieve files from any computer capable of creating a Web Services connection, which includes Windows, Macintosh, and Linux based systems, among others.

WS-API is different from the StorNext API (SNAPI) product, which allows you to run APIs for StorNext File System and Storage Manager. For more information about SNAPI, contact your Quantum Sales representative.

Enabling WS-API

In order to perform any command on the remote server (except for the `getSNAPIVersion` call), the correct password must be specified with the call.

The server verifies this password against the one stored in the `/usr/adic/.snapipassword` file on the server. Make sure this file is the same on all metadata controllers (MDCs) you will be accessing. This is especially important if you are using virtual IP (VIP) addresses, because

you can be communicating to different machines across different API calls or even retries of the same call.

The `.snapipassword` file is stored as clear text and it should be set to be readable only by root. If this file does not exist, no calls other than `getSNAPIVersion` will succeed.

Sample WS-API code is included in StorNext distributions in the Examples directory which is at the same level as the operating system installation directory. Inside the Examples directory is a zipped file named `SNAPITest.zip`, which includes the sample files. This code is ready to be copied to your Windows development machine.

Note: The installation procedure does not transfer the Examples directory from the distribution media.

WS-API APIs

This section provides descriptions and syntax for the APIs included with WS-API. Examples of each API are also provided.

The doCancel API

Given a `requestID` (which can be retrieved by running the `getSMQueue` API), running the `doCancel` API aborts an operation in progress. Running this API is equivalent to running the `fscancel` command.

Syntax

```
public string[] doCancel(string password, string requestID);
```

Example

```
String[] result = snapiClient.doCancel(password, requestID);
```

The doMediaMove API

Use the `doMediaMove` API to move media from one archive to another. Running this API is equivalent to running the `vsmove` command.

Syntax

```
public string[] doMediaMove(string password, string[] mediaIDs,
string archiveName, bool interactive, bool interactiveSpecified,
string remoteHost);
```

Example

```
String[] result = snapiClient.doMediaMove(password, mediaList,
archiveNameBox.Text.ToString(), interactiveCheckBox.Checked,
true, remoteHostBox.Text.ToString());
```

The doRetrieve API

Use the doRetrieve API to retrieve the data in files that have been stored and then truncated. Running this API is equivalent to running the fsretrieve command.

Syntax

```
public string[] doRetrieve(string password, string[] files, bool
updateATime, bool updateATimeSpecified, string copy, string
newFileName, string startByte, string endByte, string directory);
```

Example

```
String[] result = snapiClient.doRetrieve(password, fileList,
updateATimeCheckBox.Checked, true, copy, newFileName, startByte,
endByte, directory);
```

The doStore API

Use the doStore API to store files as specified by its respective policy. Running this API is equivalent to running the fsstore command.

Syntax

```
public string[] doStore(string password, string[] files, string
mediaType, string copies, string retention, string drivePool,
string minSize, string runTime);
```

Example

```
String[] result = snapiClient.doStore(password, fileList,
mediaType, numCopies, retention, drivePool, minSize, runTime);
```

The doTruncate API

Use the doTruncate API to truncate files that have been stored, thus freeing their allocated space on disk for reuse. Running this API is equivalent to running the fstruncate command.

Syntax

```
public string[] doTruncate(string password, string[] files);
```

Example

```
String[] result = snapiClient.doTruncate(password, fileList);
```

The getDriveReport API

Use the getDriveReport API to generate a report about the state of all storage subsystem drive components. Running this API is equivalent to running the fsstate command.

Syntax

```
public string[] getDriveReport(string password, string  
componentAlias);
```

Example

```
String[] result = snapiClient.getDriveReport(password,  
componentAlias);
```

The getFileLocation API

Use the getFileLocation API to generate a report about files known to TSM. Running this API is equivalent to running the fsfileinfo command.

Syntax

```
public string[] getFileLocation(string password, string[] files,  
bool checksum, bool checksumSpecified);
```

Example

```
String[] result = snapiClient.getFileLocation(password, fileList,  
checksumBox.Checked, true);
```

The getMediaInfo API

Use the getMediaInfo API to produce a list of media in a data and/or storage area. Running this API is equivalent to running the fsmedlist command.

Syntax

```
public string[] getMediaInfo(string password, bool  
scratchPoolOnly);
```

Example

```
String[] result = snapiClient.getMediaInfo(password,
genPoolCheckBox.Checked);
```

The getMediaReport API

Use the getMediaReport API to generate a report on media based on its current status. Running this API is equivalent to running the fsmedinfo and vsmedqry commands.

Syntax

```
public string[] getMediaReport(string password, string[] mediaIDs,
bool longReport, bool longReportSpecified);
```

Example

```
String[] result = snapiClient.getMediaReport(password, mediaList,
longReportBox.Checked, true);
```

The getSMQueue API

Use the getSMQueue API to produce a list of currently executing Storage Manager commands (retrieves, stores, etc.). Running this API is equivalent to running the fsqueue command.

Syntax

```
public string[] getSMQueue(string password);
```

Example

```
String[] result = snapiClient.getSMQueue(password);
```

The getSNAPIVersion API

Call the getSNAPIVersion API to obtain the version number of the currently running WS-API implementation.

Syntax

```
public string[] getSNAPIVersion(string @in);
```

This function takes one string as an argument, but that string is currently ignored and can be blank, and returns a string which is the version number of Web Services SNAPI running on the server.

Example

```
String[] result = snapiClient.getSNAPIVersion("");
```

The `getSystemStatus` API

Call the `getSystemStatus` API to obtain the current StorNext version number.

Syntax

```
String[] result;  
result = snapiClient.getSystemStatus(passwordTextBox.Text.ToString());
```

The result of the call is a string in the form "<version>, true|false, true|false, true|false, true|false, true|false". The strings are separated by a comma.

Following are the status items in the list:

- TSM_control status (True=up)
- database_control status (True=up)
- SRVCLOG_control status (True=up)
- vsping (True=MSM up)
- all file systems in the fsmlist are running (True=up)
- all of the above are running (True=all up)

Output Example

```
4.0.0 Build 14798, true, true, false, true, true, false
```

The `setMediaMoveInfo` API

Use the `setMediaMoveInfo` API to complete a media move, letting TSM know whether it was successful or not. Running this API is equivalent to running the `mmconsoleinfo` and `mmportinfo` commands.

Syntax

```
public string[] setMediaMoveInfo(string password, string  
archiveName, bool success, bool successSpecified, string[]  
operations);
```

Example

```
String[] result = snapiClient.setMediaMoveInfo(password,  
archiveNameBox.Text, successBox.Checked, true, operations);
```



Appendix E

Storage Manager Truncation

Truncation is a StorNext feature that results in removing data blocks from disk. This process frees up space for additional files to be stored on the disk. This appendix contains an overview of how Storage Manager truncation works, and how to perform simple troubleshooting.

Truncation Overview

Truncation operations fall into two categories. The first category is the truncation that is performed as part of the normal StorNext processing. The second category is the “space management” truncation policies that are run only when the disk usage reaches certain key points.

For each file system defined on the MDC, there must be an entry in the `/usr/adic/TSM/config/filesystems` file.

There are five variables specified for each file system:

- 1 Low-water mark (default value is 75%)
- 2 High-water mark (default value is 85%)
- 3 Min-Use mark (default value is 75%)
- 4 Min-Use enable (default is true)

5 Truncation enable (default is true)

If truncation is not enabled on a file system, no files residing within that file system will ever be truncated.

If truncation is enabled on a file system, as files are stored to media they automatically become truncation candidates unless they are marked for immediate truncation. (See below for more details).

Thus, a file can be truncated during one these operations:

- 1 Immediately after store (only if policy class is configured)
- 2 Daily truncation
- 3 LoSpace truncation
- 4 Emergency truncation

Normal Truncation

These truncations are performed as part of the normal processing done by StorNext.

Immediate Truncation

This refers to truncation performed immediately after all copies of a file are stored to media. This is enabled on a policy class basis and can be enabled with this command:

```
fsmodclass -c <classname> -f i
```

The default is that a stored file becomes a truncation candidate. The file will be dealt with through normal truncation processing.

Immediate Truncation can also be enabled on a file-by-file basis by using the `fschfiat` command: `fschfiat -t i filename...`

Daily Truncation

The `fs_tierman` TSM daemon kicks off policy-based truncations each day after midnight.

In this case the call is: `fspolicy -t -c <class> -m <class-trunc-min-time> -z 1`

This processes each defined policy class within StorNext until all policy classes have been completed. After the `fspolicy` has been run against

all policy classes, the daemon waits until the next day to run them again.

Each of these class-based truncation policies truncates eligible candidates until either the min-use mark, if enabled, or the low-water mark is reached or it runs out of truncation candidates. At that time it terminates execution.

An eligible truncation candidate is a file that has not been accessed during the truncation mintime interval.

Space Management

The two main space management cycles are described below. They will continue to run as long as one of the conditions for a particular cycle is met. Both the LOSPACE and "Emergency Space" conditions are handled by the `fs_space` TSM daemon.

LOSPACE Cycle

This cycle is activated when the disk usage of one or more file systems exceeds the percentage full defined by the high-water value. When reached, LOSPACE policies are executed in an attempt to reach the low-water mark on each affected file system.

By default, the policies are executed once in this order on all affected file systems:

- relocation policy
- truncation policy

The high-water and low-water values are displayed by the GUI File System Monitor and can be modified via the StorNext GUI. By default, these values are set to 85% and 75%, respectively.

In contrast to the Emergency policies described in the next section, what's different in the behavior of the LOSPACE policies is that `MINTRUNCTIME` and `MINRELOCTIME` are not ignored. Only files that can be truly relocated and truncated are affected.

First, the relocation policy is executed and it continues until there are no more relocation candidates available at which time it terminates.

The call made to perform the LOSPACE relocation is:

```
fspolicy -r -y <mountpoint>
```

If the file system usage still exceeds the high-water mark, the truncation policy is executed and it truncates all candidates until no further candidates are available, at which time it terminates.

The call made to perform the LOSPACE truncation is:

```
fspolicy -t -y <mountpoint> -z <mintruncsize>
```

At this time the LOSPACE Space Cycle is complete for this file system. All other affected file systems are then processed in the same manner, first by running the relocation policy and then the truncation policy, if needed.

After all file systems have been processed, if any of them still exceed the high-water mark, a new LOSPACE cycle is started after a one-minute wait.

Thus, the low-water percentage may or may not be reached on any given file system. It depends solely on whether there are enough candidates available for relocation and/or truncation for that file system.

Emergency Cycle

Emergency policies are executed when either of the following conditions is met for a file system:

- 1 When a file system encounters the NOSPACE event, i.e. a file write has failed because of lack of space.
- 2 When the file system usage is greater than 99%.

By default, the policies are executed once in this order:

- 1 emergency truncation policy
- 2 emergency relocation policy
- 3 emergency store policy

The emergency truncation policy finds up to the 3000 largest files that can be truncated, ignoring MINTRUNCTIME, and performs the truncation. This is executed once each time the NOSPACE condition is reached.

The call made to perform this emergency truncation is:

```
fspolicy -t -y <mountpoint> -e
```


If the file system usage has not dropped below 100% after the emergency truncation, the emergency relocation policy is now run.

When the emergency relocation policy is run, it finds all files that can be relocated, ignoring MINRELOCTIME, and performs the relocation. As with the emergency truncation policy, this is executed once each time the EMERGENCY condition is reached.

The call made to perform the emergency truncation is:

```
fspolicy -r -y <mountpoint> -e
```

If the file system usage is still not below 100% after the emergency relocation, an emergency store policy on the file system is performed.

An emergency store means that the request is placed first in the queue, and that any files in the file system which can be stored will be stored regardless of policy. As with the other emergency policies, it is run only once.

The call made to perform the emergency store is:

```
fspolicy -s -y <mountpoint> -e
```

At this point the Emergency Space Cycle is complete.

Disabling Truncation

There are two ways to disable truncation: by using truncation feature locking, and by running commands that disable truncation.

Truncation Feature Locking

Truncation operations can be locked, i.e. prevented from running, by using the `fsschedlock` command.

The feature name for each truncation operation is:

- `mintime`: Daily truncation
- `loSPACE`: LoSpace Cycle

Disable Truncation Commands

Truncation can be disabled for files by using one of the following commands:

```
fschfiat -t e <filename>
```

```
fschdiat -t e <directory name>
```

Running `fschfiat` sets an attribute on the file which will prevent it from ever being truncated. Likewise, running `fschdiat` causes the attribute to be set on files when they are created in the directory, but will not have any effect on files that already exist in the directory.

Common Problems

This section describes some common truncation problems and how to address them.

Files Are Not Truncated as Expected

Even if the truncation mintime requirement is met, files may not be truncated. Files are truncated only to keep the file system below the low-water mark (by default 75% of the capacity). When the daily truncation policies run, the oldest files are truncated first in an effort to bring the file system usage below the low-water mark. Thus, files may remain on disk even though their truncation mintime requirement has been met if the disk space is not required.

You can use the StorNext GUI to adjust the low-water and high-water marks on each file system if more free disk space is desired. A temporary option to free up disk space is to run the following command:

```
fspolicy -t -c <policyclass> -o <goal>
```

The goal argument is a disk usage percentage. For example specifying `"-o 65"` will truncate files until the disk usage either reaches 65% or there are no more valid truncation candidates, i.e. the mintime requirement has been satisfied.

"Old" Files Not Truncating According to Policy Class

Truncation uses the file access time to determine if the truncation mintime requirement has been satisfied. If any application changes the access time of a file, the aging of the file restarts.

An example of this is where image files are listed using the thumbnail mode on an Apple Macintosh. This causes the OS to read the file to present this thumbnail, and the access time of the file gets updated to the current time. This in turn results in StorNext determining this file has not satisfied the truncation mintime requirement.

Emergency truncation ignores mintime so the files could still be truncating if the file system fills up. However, the best solution is to modify the way files are accessed so as to not update the access time. In the above example, this would mean not using the thumbnail view.

Small Files Not Truncating

If a policy class has been configured to use stub files, files with a size that is less than or equal to the stub size will not get truncated.

Miscellaneous Usage Notes

If you ingest lots of data per day relative to the size of the file system, (for example, more than 80%), the file system disk usage can stay at a high level of 90% or even higher. The main reason is that the truncation mintime is a minimum of one day, so that neither the LoSpace nor the daily truncation will truncate any files until the next day.

Also the emergency truncation only works to get the disk usage less than 100% and no lower. If this is the case and the disk usage is a concern, you should consider using immediate truncation on the policy classes within this file system.

Truncation performance is typically from 1500-2000 files per second. This depends on the metadata controller (MDC) hardware configuration and other activity on the MDC.

The rebuild policy checks for truncation candidates.

Appendix E: Storage Manager Truncation
Miscellaneous Usage Notes



Appendix F Security

This appendix contains an in-depth overview security in general.

StorNext Security

There are two predominate security models in modern file systems: POSIX and Access Control Lists (ACLs). ACLs are actually “Lists” composed of Access Control Entries. These lists may be quite simple or quite complicated, depending on the user's requirements.

The POSIX model is the older and less flexible of the two, having just three main security groups: “User,” “Group” and “Other,” and three operation categories: “Read,” “Write,” and “Execute”. For a directory, “Execute” translates to the ability to change into that directory, while “Read” and “Write” control directory listings and file creation and deletion.

POSIX permissions are kept in the file's inode information and are read from the file system on Unix/Linux systems by calls to stat().

In order to know what kind of restriction to place on a file or directory, the OS first has to be able to track users and groups so it can later be matched up with its associated information in files and directories. On Windows, all users have two unique Security Identifiers (SIDs): one for their user identification and one for the groups they belong to. On Unix/

Linux and Mac OS X, every user has a User Identifier (UID) and that user is assigned to a group which has its own Group Identifier (GID).

This is the model that's built into StorNext and used by all StorNext clients on all operating systems unless it's overridden by the use of ACLs.

ACLs are currently supported only on Windows and Mac OS X. ACLs give fine-grained control over file access and do things POSIX permissions can't, such as allow for writes to a file while not allowing the file to be deleted. ACLs also offer the benefit of "inheritance", which allows a directory to specify the default set of ACLs for all files created inside of it.

ACLs are kept in the Extended Attributes for a file, which is an internal data structure attached to the file's first inode that contains additional information associated with the file. Only operating systems that know to ask for the extended information with the proper key will understand these ACLs. Currently, only Mac OS X and Windows know to use this information.

The StorNext File System implements both the Unix POSIX model, and on its Windows clients it implements the Windows Security Reference Model (SRM) to a level compatible with Microsoft's NTFS file system. Quantum attempts to marry the two models in a very simplistic way to allow a common user to bridge file objects between Unix and Windows.

StorNext does not implement any of the Unix ACLs models or the NFSv4 ACLs model.

ACLs on Windows

Each mapped drive, file, or folder on Windows contains a Windows Security Descriptor. This descriptor contains the owner, primary group, DACLs, and SACLs. Windows uses the Security Descriptor to control access to each object. Windows Administrators and Users typically use Windows Explorer to view, change, and create ACLs on files. This is done in Explorer by first selecting the file or folder, displaying its properties, and then clicking on the Security tab.

Each file/folder can have zero or more ACLs that specify how a user or group can access or not access the file or folder. The possible controls in each ACE are:

Folders	Files
Full control (all of the following)	Full control (all of the following)
Traverse Folder	Execute File
List Folder	Read Data
Read Attributes	Read Attributes
Read Extended Attributes	Read Extended Attributes
Create Files	Write Data
Create Folders	Append Data
Write Attributes	Write Attributes
Write Extended Attributes	Write Extended Attributes
Delete Subfolders and Files	
Delete	Delete
Read Permissions	Read Permissions
Change Permissions	Change Permissions
Take Ownership	Take Ownership

Each Item can be selected as: Allow, Deny, or not selected. If Full Control is selected as Allow or Deny, all the other attributes are set to either Allow or Deny.

In addition, each ACE on Windows is indicated to apply as follows:

- Folder
 - This folder only
 - This folder, subfolders, and files
 - This folder and subfolders
 - This folder and files
 - Subfolder and files only
 - Subfolder only

- Files only
- File
 - This object only

An individual object can also be set to disallow or allow inheritable ACLs from a parent, parent's parent, etc.

A folder can be created and it can be marked such that all of its ACLs will pass to any children. This process is called *propagation*. Individual ACLs on a folder can be propagated as indicated in the above list. File and sub-folders of a folder can have all or some of the “inherited” ACLs removed.

The propagation/inheritance information is contained in the Windows Security Descriptor. Users and administrators on Windows platforms use this capability extensively.

ACEs are ordered in an ACL. Explicit ACEs come first. An explicit ACE is one that is not inherited. Explicit ACEs which deny come before explicit ACEs which allow. Inherited ACEs are ordered such that the closer the parent, the sooner they appear. Each level of inherited ACEs contain deny before allow.

All file and folder access is determined by matching a user and group to the DACL of the object being accessed. The SACL is not used to perform the access check. The ACEs in the DACL are compared in order with the accessing user and group for the requesting access mode. If a “deny ACE” matches, access is denied. If an “allow ACE” matches all requested access bits, access is allowed. It is possible to have a “deny ACE” inherited after an “allow ACE” which will not take effect. This can happen because explicit ACEs take precedence as do inherited ACEs from a closer parent. See the examples in the Microsoft document “[How Security Descriptors and Access Control Lists Work.](#)”

There is an “everyone ACL” that can be added to objects such that all users are granted certain privileges if they do not match any other ACE.

When a Windows user creates a file on SNFS the Security Descriptor (SD) is kept as an attribute of the file object. The SD contains a primary SID, a group SID and a list of discrete ACLS (also know as the DACL). The SNFS file object also contains the Unix UID, GID and permissions fields. By default SNFS inserts user identifier “nobody” into both UID and GID containers. Then it modifies the Unix mode (permissions) container based on the following two rules.

- 1 If the file object contains the Windows access control entry (ACE) for the everyone SID (which equals S-1-1-0, equivalent to "world" or "all others" on Unix), then it will apply specific permissions using the following guidelines. If the object is a container object (directory) and the FILE_LIST_DIRECTORY access bit is set, mode O+R (4) is set, else it is clear.
 - a If the object is a container object and the FILE_TRAVERSE access bit is set, mode O+X (1); otherwise it is clear.
 - b If the object is a container object and the DELETE bit is set, mode O+W (2) is set; otherwise it is clear.
 - c If the object is a file and the FILE_READ_DATA bit is set, mode O+R (4) is set; otherwise it is clear.
 - d If the object is a file and the FILE_WRITE_DATA bit is set, mode O+W (2) is set; otherwise it is clear.
 - e If the object is a file and the FILE_EXECUTE bit is set, mode O+X (1) is set; otherwise it is clear.
- 2 If there is no everyone ACE, the Unix permissions for the file object will be NONE (-----).

If it is an existing file, when a user changes the Security Descriptor on a file or directory, the change can affect Posix Permissions as well:

If the owner of the file or directory is not being changed, then SNFS checks for a missing DACL or Everyone ACE within the DACL.

If there is no DACL, set the new mode to allow the owner to read/write/execute.

If there is a DACL, scan the ACEs for the "Everyone" SID, either in the Allow or Deny state:

- 1 Check the ACE mask to see if READ_DATA/WRITE_DATA/EXECUTE_FILE is set, and adjust the Other mode of the Posix permissions accordingly.
- 2 The User and Group mode bits are left untouched.
- 3 The Unix*FileCreationOnWindows configuration options are ignored for the Everyone SID

If the owner is changing:

- 1 map the SID owner to unix User/Group ownership via active directory - store this for later application

- If the SID does not have a UID associated with it, map the UID to the value of the MDCs configuration option, `UnixNobodyUidOnWindows`.
 - If the SID does not have a GID associated with it, map the GID to the value of the MDCs configuration option, `UnixNobodyGidOnWindows`.
- 2 Convert the mode bits for the Group and User - apply the `Unix*CreationModeOnWindows` config option masks to these.
 - 3 Apply the Everyone bits per step 1.2 above - again note that the Everyone ACE conversion to Posix Permissions ignores the `Unix*CreationModeOnWindows` configuration options
 - 4 Check to see if the `DOSMODE_READONLY` flag is set, and mask out the User/Group/Owner write bits if it is.
 - 5 If the UID is different from what is currently stored, change it (it is possible to have multiple SIDs mapped to the same UID)
 - 6 If the GID is different from what is currently stored, change it (it is possible to have multiple SIDs mapped to the same GID)

Note: The Standard Posix Permissions Other bits get set via the Everyone ACE regardless of the `UnixFileCreationModeOnWindows` and `UnixDirectoryCreationModeOnWindows` settings.

ACLs on Mac OS X

With Mac OS X 10.3 (Tiger), ACLs were introduced. This ACL implementation is very close to the Windows ACLs implementation.

The `chmod(1)` and `ls(1)` commands have been modified to handle ACLs. There is also a library API for applications, `acl(3)` that allows programs to operate on ACLs.

For a detailed description of Mac OS X ACLs, see "Security Overview: Permissions" from Apples web sites and click on ACLs.

ACLs take precedence over regular UNIX permissions. If no ACE match is found for a user's requested access, UNIX permissions are checked. Therefore, a user may not match any ACE but still have access if UNIX permissions allow.

Each ACE on Mac OS X has the same 13 possible permission bits as a Windows ACE:

Directories	Files
Search Through	Execute File
List Contents	Read Data
Read Attributes	Read Attributes
Read Extended (named) Attributes	Read Extended (named) Attributes
Create Files	Write Data
Create Subdirectories	Append Data
Write Attributes	Write Attributes
Delete Subdirectories and Files	
Delete this Directory	Delete this Directory
Read Permissions (ACL)	Read Permissions (ACL)
Change Permissions (ACL)	Change Permissions (ACL)
Take Ownership	Take Ownership

Inheritance on Mac OS X is similar but does vary from Windows propagation and inheritance. Each ACE applied to a directory can be “propagated” by indicating one of 4 tags:

- 1 **file_inherit**: Propagate this ACE to files created in this directory.
- 2 **directory_inherit**: Propagate this ACE to subdirectories created in this directory.
- 3 **limit_inherit**: After propagating this ACE to a new subdirectory, do not let its subdirectories inherit this ACE.
- 4 **only_inherit**: Do not apply this ACE to this directory, just to files and/or directories created below it.

The “limit_inherit” exists in Windows as a check box when creating an ACE on a folder that propagates. The mapping of the 3 remaining

tags to the 7 Windows propagation pull down menu options are as follows:

Windows	Mac OS X
This folder only	(none)
This folder, subfolders, and files	directory_inherit, files_inherit
This folder and subfolders	directory_inherit
Subfolders and files only	files_inherit
Subfolders and files only	files_inherit, directory_inherit, only_inherit
Subfolders only	directory_inherit, only_inherit
Files only	files_inherit, only_inherit

On Mac OS X, propagation/inheritance is typically applied only when a file or directory is created. That is, when an object is created, its parent's list of ACEs is checked and any that apply are "inherited." When an ACE is added to a parent directory, it is not "automatically" propagated to any existing files or directories. Window's has a check box to cause some of this action when creating an ACE. On Mac OS X, the "chmod" command with the "+a1" option can be used to cause children to inherit an ACE. This can be done for large sub-trees with the chmod -R option.

Order of ACE entries is important because some ACEs might explicitly deny while others allow. Local ACEs are entries which are not inherited and by default are inserted before inherited ACEs. ACEs are checked in order for the requesting user/group and the requested access. The first ACE that denies or allows all the requested access stops permission determination. If there is a subsequent opposing deny or allow ACE, it will be ignored.

ACLs can be explicitly ordered with the `chmod` command which can lead to “non-canonical” ordering of ACLs. See Apple documentation for more details.

“Central Control”

With StorNext 4.0, there is now support for cluster-wide central control to restrict the behavior of SNFS cluster nodes (fsm server, file system client and cvadmin client) from a central place. A central control file, `nss_cctl.xml`, is used to specify the desired controls on the cluster nodes. This file resides under `/usr/cvfs/config` on an nss coordinator server.

This control file is in xml format and has a hierarchical structure. The top level element is `snfsControl`. It contains the control element `securityControl` for certain file systems. If you have different controls for different file systems, each file system should have its own control definition. A special virtual file system `#SNFS_ALL#` is used as the default control for file systems not defined in this control file. It is also used to define the cvadmin related controls on clients.

Note: You cannot have a real file system named `#SNFS_ALL#`.

Each file system related control element (i.e., `securityControl`) has a list of `controlEntry` entries. Each `controlEntry` defines the client and the intended controls. A client can be of type `host` or `netgrp`. For the `host` type, `hostName` can be either an IP address or a host name. Both IP V4 and IP V6 are supported.

The `netgrp` entry specifies a group of consecutive IP addresses. `netgrp` has two sub-elements: `network` defines the IP address (either V4 or V6) of the network group, and `maskbits` defines the network mask bits.

Overlap is possible between the IP addresses in the `host` section and the `netgrp` section, and the `host` entries should be defined before `netgrp` entries. In this case, the `netgrp` control is considered to be a generic case, while the controls for individual hosts are considered to be a special case. A special case takes precedence.

Controls

Currently seven controls are supported. Each control has this format:

```
<control value="true|false"/>
```

The "value" can be either "true" or "false". The control is one of the following controls:

mountReadOnly

Controls whether the client should mount the given file system as read only. Value "true" means the file system is mounted as read only. Value "false" means the file system is mounted as read/write. If this control is not specified, the default is read/write.

mountDlanClient

Controls whether the client can mount the given file system via proxy client. Value "true" means the file system is allowed to mount via proxy client. Value "false" means the file system is not allowed to mount via proxy client. The default is "mount via proxy client not allowed".

takeOwnership

Controls whether users on a Windows client are allowed to take ownership of files or directories of the file system. Value "true" means Windows clients are allowed to take ownership of files or directories. Value "false" means Windows clients are not allowed to take ownership of files or directories. The default is that "take ownership is not allowed".

Note: This control only applies to the clients running on Windows platforms.

snfsAdmin

Controls whether cvadmin running on a host is allowed to have super admin privilege to run privileged commands such as starting or stopping a file system. Value "true" means the host is allowed to run privileged commands. Value "false" means the host is not allowed to run privileged commands. If this control is not specified, the default is that super admin privilege is not honored.

snfsAdminConnect

Controls whether cvadmin running on a client is allowed to connect to another fsm host via "-H" option. Value "true" means the client is allowed to connect to another fsm host. Value "false" means the client is not allowed to connect to another fsm host. The default is that "-H" is not allowed.

exec

Controls whether binary files on the file system are allowed to be executed. Value "true" means their execution is allowed. Value "false" means their execution is not allowed. The default is that their execution is allowed.

suid

Controls whether set-user-identifier bit is allowed to take effect. Value "true" means the set-user-identifier bit is honored. Value "false" means the set-user-identifier bit is not honored. The default is that suid bit is honored.

Note: If no match is found for a given client's IP address, then the client has no privilege to access a SNFS cluster. If a file system has been defined, but the client is not defined in that file system's control (`securityControl`), then the client has no access privilege to the specified file system.

Limitations

Currently only the Linux platform is supported to be a nss coordinator server capable of parsing this xml file. If you have a non-Linux machine as the fsm server, in order to enforce this cluster-wide central control, you must use a Linux machine as your nss coordinator with this central control file in place. The nss coordinator typically can be a very low-end machine as it is not stressed heavily.

Example

Following is an example of a `nss_cctl.xml` file. In the example this file defines control of file system "snfs1," and also the special virtual file system "#SNFS_ALL#".

```
<snfsControl xmlns="http://www.quantum.com/snfs/
cctl/v1.0">
  <securityControl filesystem="snfs1">
    <controlEntry>
      <client type="host">
        <hostName value="192.168.230.132"/>
      </client>
    <controls>
      <mountReadOnly value="true"/>
    </controls>
  </securityControl>
</snfsControl>
```

```
        <mountDlanClient value="true"/>
        <takeOwnership value="false"/>
        <exec value="true"/>
        <suid value="false"/>
    </controls>
</controlEntry>
<controlEntry>
    <client type="netgrp">
        <network value="192.168.1.0"/>
        <maskbits value="24"/>
    </client>
    <controls>
        <takeOwnership value="true"/>
        <mountReadOnly value="true"/>
    </controls>
</controlEntry>
</securityControl>
<securityControl fileSystem="#SNFS_ALL#">
    <controlEntry>
        <client type="host">
            <hostName value="linux_ludev"/>
        </client>
        <controls>
            <snfsAdmin value="true"/>
            <snfsAdminConnect value="true"/>
        </controls>
    </controlEntry>
</securityControl>
</snfsControl>
```

Cross-Platform Permissions

In a homogenous environment permissions aren't a problem because they are either all POSIX, all Windows ACLs, or all Mac OS X POSIX/ACLs. However, when moving to a heterogeneous environment with, say, Macs and Linux, or Windows and Macs, the interaction between POSIX and ACLs can become complicated.

Config (.cfg) File Options

The StorNext config file has the following options that relate directly or indirectly to security or permissions:

- GlobalSuperUser
- Quotas
- UnixDirectoryCreationModeOnWindows
- UnixFileCreationModeOnWindows
- UnixIdFabricationOnWindows
- UnixNobodyGidOnWindows
- UnixNobodyUidOnWindows
- WindowsSecurity

GlobalSuperUser defines whether or not the global super user (root) privileges on the file system. It allows the administrator to decide if any user with super-user privileges may use those privileges on the file system. When this variable is set to "Yes", any super-user has global access rights on the file system. This may be equated to the maproot=0 directive in NFS. When the GlobalSuperUser variable is set to "No", a super-user may modify files only where he has access rights as a normal user. This value may be modified for existing file systems.

Quotas has an indirect relationship with security in that it requires a Windows Security Descriptor (SD) to track the owner of a file to correctly maintain their quota allotment. Currently quotas in StorNext File System-only systems work correctly in either all-Windows or all-non-Windows environments. This is because of the way quotas are tracked; when the meta-data server is deciding how an allocation should be charged, it uses either the SD, if one exists, or the UID/GID.

Files created on Windows with WindowsSecurity ON always have an SD. Files created on non-Windows never have an SD. If a file that was created and allocated on a non-Windows platform is simply viewed on Windows, it gets assigned an SD as described above. At that point the quota will be wrong. Subsequent allocations of that file will be charged to the SD and not the UID/GID.

To fix this problem, the UID/GID "space" and SD "space" must be consolidated into one "space".

Note: When you enable or disable quotas using the CLI `cvadmin` command, the change does not persist after rebooting. In order to permanently enable or disable quotas, you must modify the Quotas parameter of the file system config file.

`UnixDirectoryCreationModeOnWindows` controls which initial permissions directories have. Typically this is set to 755, but might be set to 700 to prevent access by anyone other than the owner on Unix systems, and on Windows require the use of ACLs to allow the directory to be accessed by anyone other than the owner.

`UnixFileCreationModeOnWindows` controls which initial permissions files have. Typically this is set to 644, but might be set to 600 to prevent access by anyone other than the owner on Unix systems, and on Windows require the use of ACLs to allow the file to be accessed by anyone other than the owner.

`UnixIdFabricationOnWindows` prevents (when set to “no,”) or allows (when set to “yes”) fabricating a UID/GID for a GUID returned from a Microsoft Active Directory Server. When set to “yes”, the client overrides any UID/GID for that user, and instead fabricates its own UID/GID. Typically this setting is only set to “yes” if you have a Mac OS MDC.

`UnixNobodyGidOnWindows/UnixNobodyUidOnWindows` instructs the client to use this ID on Windows if an ID can't be found using Microsoft Active Directory.

`WindowsSecurity` enables or disables using Windows ACLs on Windows clients. Once turned on (provide a Windows security descriptor is created), it is always on, even if the `.cfg` is changed to “off”. In a Unix/Windows environment, if there isn't a specific Windows- User-to-Unix-User mapping, files created on Windows will be owned by “nobody” on Unix clients.



Appendix G

Troubleshooting

This appendix contains some basic troubleshooting remedies for common error conditions that may occur. Please see if your particular issue is listed, and then try the recommended solution before calling the Quantum Technical Assistance Center.

Another good troubleshooting resource is the Quantum Knowledge Base, which contains articles about issues pertaining to StorNext. Access the Knowledge Base from Quantum.com.

This appendix contains the following troubleshooting topics:

- [Troubleshooting StorNext File System](#)
- [Troubleshooting StorNext Storage Manager](#)
- [Troubleshooting OS Issues](#)
- [Troubleshooting Replication](#)
- [Troubleshooting HA](#)
- [Troubleshooting StorNext Installation and Upgrade Issues](#)
- [Troubleshooting Other Issues](#)

Troubleshooting StorNext File System

This section contains troubleshooting suggestions for issues which pertain to StorNext File System.

Question: How do I rename a standalone (unmanaged) StorNext file system?

Answer: Use the following procedure to change the name of a StorNext file system:

Note: This procedure is only for StorNext file systems that do not have the Tertiary Storage Manager (TSM) component installed.

- 1 Unmount the file system from all the client systems using it.
- 2 Stop the file system in cvadmin.
- 3 Run cvfsck with the following parameters:

```
cvfsck -j file_system_name  
cvfsck -n file_system_name
```

where `file_system_name` is the actual name of your file system.
Make sure that cvfsck says that the file system is clean.
- 4 Do one of the following:
 - * If cvfsck detects no file system errors, go to the next step.
 - * If cvfsck detects file system errors, run it in a "fix" mode

```
cvfsck file_system_name
```
- 5 Rename the `file_system_name.cfg` file and edit the `fsmlist` file to reflect the new file system name.

By default, these files reside in the `/usr/cvfs/config` directory on UNIX systems and in the `C:\SNFS\config` folder on Windows systems.
- 6 Run cvfsck in interactive mode to remake icb by typing cvfsck without double quotation marks. You will be asked which file system to check.

Here is a command example:

```
[root@testbox]# cvfsck
StorNext File System File Systems on host testbox:
1) *snfs1
2) *snfs2
The asterisk (*) denotes the file system is active.
Choose a file system by number (1-2) or zero (0) to
exit
```

Run the command against the file system that has a new name.

- 7 During its run, cvfsck senses that there is an icb mismatch and asks if you want to fix the mismatch. Type yes.
- 8 Make adjustments to the /etc/vstab and /etc/fstab files, as well as in the Windows StorNext User Interface to reflect the new file system name on all the systems involved.
- 9 Start the file system and make it active (cvadmin).
- 10 Mount the file system.

Question: What can I do when a StorNext File System client fails to mount a StorNext file system? I receive the following error:

```
'install path'\debug\mount..out
mount.cvfs: Can't mount filesystem 'FILESYSTEMNAME'.
Check system log for details. Invalid argument
```

Answer: This condition occurs when the system cannot resolve the IP address or hostname defined in the fsnameservers file.

Use the following procedure to troubleshoot this problem.

- 1 Find the failure reported in the file install_path/debug/nssdbg.out.


```
ERR NSS: Establish Coordinator failed GetHostByName
of '[HOST01]'
No such file or directory)
INFO NSS: Primary Name Server is 'HOST01' (unknown
IP)
ERR NSS: Establish Coordinator failed GetHostByName
of '[HOST02]'
(No such file or directory)
INFO NSS: Secondary #1 Name Server is '[HOST02]'
(unknown IP)
```

- 2 If it is similar to the events reported above, please check the file `fsnameservers` for proper setup.

The file is located in the following directory, depending upon the product and operating system:

- * For Windows StorNext File System 2.x: `C:\SNFS\config`

- * For Windows StorNext File System 3.x: `C:\Program Files\Stornext\config`

- * For Linux or UNIX 3.x and higher: `/usr/cvfs/config`

For this example, the hostname definition line was set up incorrectly:

```
# Primary FS Name Sserver is rock # HOST01#
# Secondary FS Name Server
#1 is crag
# [HOST02]
```

The format for the `fsnameservers` file should contain the name of the IP address or hostname to use as either a primary or a secondary coordinator. Using the IP addresses is preferred to avoid problems associated with lookup system (DNS or NIS) failures. The format of an `fsnameservers` file line is either:

```
IP_address or HOSTNAME
```

- 3 Correct the `fsnameservers` file so that it looks like this:

```
10.65.160.42
10.65.160.78
```

- 4 If the same error reoccurs, contact Quantum Technical Support.

Question: [I have trouble with StorNext clients connecting to the StorNext metadata controller. What can I do?](#)

Answer: One of the common issues in working with StorNext clients is the inability to connect to the StorNext metadata controllers (MDCs). Usually you can show this problem either by running `cvadmin` on a UNIX-based client or by clicking `Device Mappings>StorNext File System Client Properties` for a Windows-based client, and not being able to see the file systems from the StorNext MDC(s). If file systems are not visible at this level, the client is not connected to the MDC(s).

As described in the StorNext documentation, the MDC(s) and all clients should be on a dedicated and isolated metadata network. The dedicated metadata network should be open to all ports for UDP and

TCP traffic. In addition, the metadata controller(s) and network switches should not have firewalling enabled for the dedicated metadata network.

If the client is still not able to connect to the MDCs through the dedicated metadata network, check for the following:

- Is the hostname or IP address of the correct MDC(s) listed in the `fsnameservers` file (found in `/user/cvfs/config` for UNIX-based clients and `c:\SNFS\config` for Windows-based clients)?
- If the hostname (rather than the IP address) is listed in `fsnameservers`, can the client resolve the hostname (using `nslookup` at the UNIX prompt or at the command prompt on a Windows-based client)?

If the client cannot resolve the hostname, do one of the following:

- Resolve either the DNS setup or hosts file setup
- Enter the IP address of the MDC(s) in the `fsnameservers` file instead of the hostname.
- Can the client ping the metadata controller?

If the client cannot ping the metadata controller, resolve the networking issue to make sure the client is on the same dedicated metadata network and can ping the MDC(s).

- If the client can ping the MDC(s), can the client either telnet, ftp, or ssh from the client to the MDC(s)?

If the client cannot run telnet, ftp or ssh from the client to the MDC(s), it is likely that there is some manner of firewalling set up between the client and the MDC(s). If possible, disable this firewalling.

- If firewalling is set up on the dedicated metadata network and it is not possible to disable it due to some internal policy (the metadata network should be a dedicated and isolated network), the client can specify a range of ports to be used for metadata traffic.

By creating an `fsports` file (located in `/user/cvfs/config` for UNIX-based clients and `c:\SNFS\config` for Windows-based clients), you can specify a range of ports, both UDP and TCP, that can be allowed to pass through the firewall between the client and the MDC(s).

If other clients are having problems connecting to the MDC(s), they must also use their own copy of the fsports file.

Sample fsports File

```
#
# File System Port Restriction File
#
# The fsports file provides a way to constrain the TCP
# and UDP ports used by the SNFS server processes.
# This is usually only necessary when the SNFS
# control network configuration must pass through
# a firewall. Use of the fsports file permits
# firewall 'pin-holing' for improved security.
# If no fsports file is used, then port assignment
# is operating system dependent.
#
# If an fsports file exists in the SNFS 'config'
directory it
# restricts the TCP and UDP port bindings to the user
specified
# window. The format of the fsports file consists of two
lines.
# Comments starting with pound-sign (#) in column one
# are skipped.
#
# MinPort VALUE
# MaxPort VALUE
#
# where VALUE is a number. The MinPort to MaxPort values
define
# a range of ports that the SNFS server processes can
use.
#
#
# Example:
#
# Restrict SNFS server processes to port range 22,000 to
22,100:
#
# MinPort 22000
# MaxPort 22100
#
```


Question: Does StorNext support dynamic file system growth? How can I grow a file system?

Answer: StorNext does not support dynamic growth. You can grow a file system by adding stripe groups, but this is a manual process.

The process takes only a few minutes, with the exception of running the `cvfsck` command, which can take a long time depending on the size and number of files in the existing file system.

Use this procedure to grow a file system.

- 1 Unmount all clients.
- 2 On the Metadata Controller (MDC) go into `cvadmin` and stop the active file system.
- 3 Run a `cvfsck` command in active mode.
- 4 Label new disks.
- 5 Create a new Stripe Group at the bottom of the existing Stripe Group Section in your `file_system_name.cfg` file.

Caution: Make sure you put the new stripe group at the bottom of the configuration file. Putting the new stripe group elsewhere in the file can cause either data loss or data corruption.

- 6 Run the `cvupdatefs` command from the `/usr/cvfs/bin` directory.
- 7 Start file system in `cvadmin`.
- 8 Mount clients.

Question: How much data is reserved for StorNext disk labels, and what is the process for recovering damaged labels?

Answer: StorNext reserves the first 1 MB of the disk for the label.

- For VTOC disk labels, the critical area of the label is the first 1,536 bytes (three 512-byte sectors).

VTOC is the only label type used by StorNext Version 2.6 and earlier, and is the default type used for LUNs with less than 2GB sectors by StorNext Version 2.7.

- For EFI disk labels, the critical area of the label varies with the disk sector size:

- For 512-byte sectors it is the first 18,432 bytes (36 sectors).
- EFI is used by StorNext 2.7 for LUNs larger than 2GB sectors.

If a StorNext disk label is ever inadvertently overwritten or otherwise damaged, the only method of recovery is to run the `cvlabel` utility with the original parameters used when the disk was initially labeled. The `nssdbg.out` log file for the system often proves useful in determining what label each disk device on the system had before the problem occurred.

Contact Quantum technical support for assistance recovering damaged disk labels.

Question: `Umount` hangs or fails for StorNext File Systems even though the `fuser` shows nothing. What's going on?

Answer: If a process opens a UNIX domain socket in a StorNext File System and does not close it, `umount` hangs or fails even though `fuser` does not show anyone using the file system.

Use the "`lsof -U`" command to show the UNIX domain socket. The process can be killed with the socket open.

Question: Why can I mount only 16 StorNext file systems on systems running Linux?

Answer: A pseudo device must be created in `/dev` for each file system to be mounted. By default, only 16 pseudo devices are created.

To increase that number, edit `/etc/init.d/cvfs` and change the line that says "`NumDevs=16`" to reflect the desired number of file systems.

Question: How do I resolve invalid inode errors

Answer: You may receive the error `File System FSS 'File System Name[0]': Invalid inode lookup: 0x2a5b9f markers 0x0/0x0 gen 0x0 nextiel 0x0`

Deleting an old file system while an NFS client is still mounted leaves legacy data about inodes that no longer exist on that client. The client is out of sync with the file system and calls for inodes that no longer exist. This leaves StorNext users with the concern that they have lost files that can't be recovered. Because of this issue, the MDC generates alarming messages about metadata corruption.

Checking the "epoch" field of the NFS request and the file system will show that these inodes are all zeros and thus invalid. Code can be

changed in the NFS handles so they include a unique identifier such as the “epoch” (microsecond creation time) for the file system.

Question: What happens when a file is moved from one managed directory to another?

Answer: Here are three possible scenarios, which assume that the file data is no longer on disk and only exists on tape:

- Scenario 1: If the managed directories are on the same file system and have the same policy class, then tape is not accessed.
- Scenario 2: If the managed directories are on different file systems and have the same policy class, the data is retrieved from tape so it can be moved to the new file system, but it does not get stored again.
- Scenario 3: If the managed directories have different policy classes, then the data is retrieved, moved, and then gets stored to media associated with the new policy class.

You might receive the following error message if a StorNext file system client system continuously reports restarting the file system and fills up the nssdbg.out file (excerpted from logfile </usr/cvfs/debug/nssdbg.out>):

```

:
[0327 14:40:59] 0x40305960 NOTICE PortMapper: RESTART
FSS service 'stornext-fs1[0]' on host stornext-client.
[0327 14:40:59] 0x40305960 NOTICE PortMapper: Starting
FSS service 'stornext-fs1[0]' on stornext-client.
[0327 14:40:59] 0x40305960 (debug) Portmapper: FSS
'stornext-fs1' (pid 8666) exited with status 2 (unknown)
[0327 14:40:59] 0x40305960 (debug) FSS 'stornext-fs1'
LAUNCHED -> RELAUNCH, next event in 60s
[0327 14:41:59] 0x40305960 (debug) FSS 'stornext-fs1'
RELAUNCH -> LAUNCHED, next event in 60s
[0327 14:41:59] 0x40305960 NOTICE PortMapper: RESTART
FSS service 'stornext-fs1[0]' on host stornext-client.
[0327 14:41:59] 0x40305960 NOTICE PortMapper: Starting
FSS service 'stornext-fs1[0]' on stornext-client.
[0327 14:41:59] 0x40305960 (debug) Portmapper: FSS
'stornext-fs1' (pid 8667) exited with status 2 (unknown)
[0327 14:41:59] 0x40305960 (debug) FSS 'stornext-fs1'
LAUNCHED -> RELAUNCH, next event in 60s

```

```
[0327 14:42:59] 0x40305960 (debug) FSS 'stornext-fs1'  
RELAUNCH -> LAUNCHED, next event in 60s
```

:

This error occurs because on the StorNext client system the file `/usr/cvfs/config/fsmlist` was set up and configured. However, the 'fsmlist' file belongs to the server components of StorNext and is set up on the MDC only.

Verify this by running the command `<ls-l/usr/cvfs/config/fsmlist>` on the client: `stornext-fs1`

On the StorNext client, only the client portion of the StorNext product suite is installed. Verify this by running the command `# cvversions`. The following output appears:

Server not installed.

File System Client:

Built in `/scmbld/phxbld/cvfs`

Created on Wed Jun 4 23:11:32 MDT 2008

Built for Linux 2.6.9-67.ELsmp x86_64 -- RHEL 4.6

Client Revision 3.1.2 Build 10

To resolve this issue, delete `/usr/cvfs/config/fsmlist` and then restart the StorNext services.

Before you restart the StorNext services, verify the size of the `/usr/cvfs/debug/nssdbg.out`.

If the output file is considerably large, delete or rename the file and then restart StorNext.

If the problem persists, contact Quantum Technical Support.

Troubleshooting StorNext Storage Manager

This section contains troubleshooting suggestions for issues which pertain to StorNext Storage Manager.

Question: What should I do if StorNext fails to write to a tape drive and varies it to 'off-line' after the drive has been replaced?

Answer: In this situation you might receive the following error message after the write fails and the replaced drive has been placed off-line:

```
fs_resource[6609]: E1004(4)<00000>:{3}: Drive 2
SN:1310012345 has invalid device path and is being
taken off-line.
```

The message indicates that the device configuration was not updated and the replacement tape drive has a different serial number. Compare the serial numbers of the configured tape drives against which tape drives are seen by the operating system.

In this example, the system has two tape drives configured. Run the `-fsconfig` command and check the command output. It should look similar to the following:

```
Component ID: V0,1
```

```
-----
-----
Device pathname: /dev/sg6
Compression: On
User Alias: scsi_archive1_dr1
Component Type: DRIVE
Device serial #: 1310999999
Drive Type: LTO
Drive ID: 1
```

```
Component ID: V0,2 <--- this is Drive 2
```

```
-----
-----
Device pathname: /dev/sg2
Compression: On
User Alias: scsi_archive1_dr2
Component Type: DRIVE
Device serial #: 1310012345 <--- the serial number no
longer matches with the new tape drive
Drive Type: LTO
Drive ID: 2 <--- this is Drive 2
```

Compare the results with the output of the 'fs_scsi -p' command.

```
ADICA0C012345_LLA | Scalar i500 | medium changer | /
dev/sg5
```

```
1310999999          | ULTRIUM-TD4 | sequential access | /
dev/sg6  <--- scsi_archive_dr1
```

```
1310888888          | ULTRIUM-TD4 | sequential access | /
dev/sg4  <--- device path and serial number is not
known.
```

A new tape drive has a new serial number. If a drive is replaced, the special device file (/dev/sg2) is no longer valid.

To resolve the issue, follow these steps:

- Delete the original removed tape drive using the StorNext GUI. (See the StorNext User Guide for more information about this procedure.)
- Add the replacement tape drive using the StorNext GUI. (Again, consult the StorNext User Guide for more information about this procedure.)

If the issue persists, contact Quantum Technical Support. Refer to the Worldwide Service and Support page for more information.

Troubleshooting OS Issues

This section contains troubleshooting suggestions for issues pertaining to the operating system on which StorNext runs.

Question: When I updated the OS, all connected LUNs were reformatted and data lost. Is there anything I can do to prevent this from happening?

Answer: If you are not careful when performing an operating system update or reload, all attached LUNs can be reformatted and data on those LUNs will be removed. If the updated system includes StorNext, this could cause StorNext to no longer function.

When performing an operating system update or reload, disconnect any fibre-attached media from the system and have only local operating system-required LUNs visible. This will make sure only the required LUNs are affected.

Question: I've discovered that StorNext cannot see all disks when running Red Hat Linux. What should I do?

Answer: StorNext File System cannot see all the drives you want to configure in Red Hat Linux. When Linux is installed, it defaults to only 40 disk devices when it boots up.

To address this limitation, modify the `CONFIG_SD_EXTRA_DEVS` setting in your Linux config file (or use `xconfig` under the SCSI Support tab). Then, rebuild the kernel and reboot the system.

If you require assistance rebuilding a Linux kernel, contact the Linux support resources for your installation.

Question: What does the 'heartbeat lost' message from a Solaris client mean?

Answer: On a Solaris client, you may see the following error:

```
fsmpm[3866]: [ID 702911 daemon.warning] NSS: Name Server
'StorNext hostname' (xxx.xxx.xxx.xxx) heartbeat lost,
unable to send message.
```

In StorNext, the metadata controller and clients use an Ethernet network to exchange file system metadata. The `fsmpm` is a portmapper daemon residing on each StorNext File System client and server computer. Its purpose is to register an RPC identifier to the system's portmap daemon. The `fsmpm` publishes a well-known port where the file system (`fsm`) daemons register their file system name and port access number. All clients then talk to their local `fsmpm` to discover access information for their associated service.

Because of the importance of maintaining this connection, a heartbeat is performed over the metadata network, so if this connection is lost, a message is sent indicating a network communication problem to the `fsnameserver` (`xxx.xxx.xxx.xxx`).

Portmapper messages are logged in the `nssdbg.out` log file located in `/usr/cvfs/debug`.

System administrators should monitor the log files to make sure that connectivity is maintained.

Question: Why does StorNext fail to write to an LTO-4 tape drive and varies media to suspect on my Red Hat 5 and SuSE 10 system?

Answer: StorNext Storage Manager fails to write to a tape drive and marks the medium as 'suspect'.

Note: This is applicable only to Red Hat RHEL 5 and SuSE SLES 10 operating systems and StorNext 3.1.x (not to 3.5.0).

When a medium is marked as 'suspect,' check if the below messages are reported in the TSM log files:

```
Received check condition with no error data. op=0A
Flush residue write to destination failed: errno 0
Unable flush all of residue buffer to destination.
Write error occurred - marking media suspect.
Medium XXXXXX was marked as suspect.
```

If you receive this error message, the default settings of the SCSI generic driver of RHEL 5 and SLES 10 must be adjusted. (For more information about the default settings, visit the following web site: <http://www.linux.org/>.)

Following is a description of the parameters in question:

`allow_dio`: 0 indicates direct I/O disable, 1 indicates enabled

`def_reserved_size`: This is the default buffer size reserved for each file descriptor. Values between 0 and 1048576 are supported.

`allow_dio`: Quantum recommends setting this parameter to 1.

`def_reserved_size`: Quantum recommends setting this parameter to 524288 (= 512kB)

To verify, run these commands:

```
cat /proc/scsi/sg/allow_dio
cat /sys/module/sg/parameters/allow_dio
```

If the above commands return a value of '0', this means direct I/O is disabled. Run these commands:

```
cat /proc/scsi/sg/def_reserved_size
cat /sys/module/sg/parameters/def_reserved_size
```

If the above commands return a value less than '524288', this means the buffer size is not appropriate for LTO-4 tape drives.

Verify if the TSM startup file `/usr/adic/TSM/bin/TSM_control` defines any of the above parameters.

Substitute the settings as seen below or add them to the startup script after the shell declaration (`#!/bin/sh`) and the initial comments.

```
if echo RedHat50AS_26x86 | egrep "RedHat5|SuSE10" > /
dev/null; then
    echo      1 > /proc/scsi/sg/allow_dio
    echo 524288 > /proc/scsi/sg/def_reserved_size
    echo      1 > /sys/module/sg/parameters/allow_dio
    echo 524288 > /sys/module/sg/parameters/
def_reserved_size
fi
```

If the issue persists after making the above changes, contact Quantum Technical Support from the Worldwide Service and Support page.

Troubleshooting Replication

This section contains troubleshooting suggestions for issues which pertain to replication.

Question: After completing the steps to set up replication, I received this message: "Replication disabled on target." What went wrong?

Answer: You will receive this message if you fail to turn on inbound replication. To do this, edit the replication policy named "target" and then click the **Inbound Replication** tab. At the Inbound Replication field, select **On** from the pulldown list of options.

Question: What should I do if something happens to my replication source, such as if the source directory or its contents becomes damaged?

Answer: If there is a failure on the source, the system administrator must reconfigure both the replication source and target hosts. Specifically, the administrator must turn the former replication target into a replication source, and then reconfigure the former source (once it is repaired) as a replication target.

Question: I upgraded to StorNext 4.0 from a previous release. How do I replicate files that were previously truncated by Storage Manager in that previous release?

Answer: One solution would be to retrieve the files from the original managed source location, and then replicate and truncate the files.

Troubleshooting HA

This section contains troubleshooting suggestions for issues which pertain to StorNext HA (high availability) systems.

Question: How can I restart a file system without causing an HA failover?

Answer: To be clear, individual file-system failover must be distinguished from HA Reset of an entire MDC. When redundant FSMs are running on both MDCs in an HA Cluster, the active FSM can be on either MDC. In the case of managed file systems, the FSMs are started only on the Primary MDC, so these can be stopped and started at will without causing an HA Reset. Unmanaged file-system FSMs are started on both MDCs, so stopping an active unmanaged FSM will result in a single file system failover to the standby FSM on the peer MDC. An HA Reset occurs only when the failover is putting the file system in danger of data corruption from simultaneous write access to StorNext metadata and databases. This is typically the case for the HaShared file system, so take extra care with its FSM.

The recommended way for making configuration changes and restarting FSMs is to use the 'config' mode, which stops CVFS on one MDC and disables HA Reset on the other. CVFS will be restarted when returning to 'default' mode with both MDCs operating redundantly. Use the following steps to do this at the CLI:

```
snhamgr config
<make configuration changes>
snhamgr start
```

If you are only restarting FSMs without making configuration changes, the following steps will restart an FSM:

To restart an HaManaged FSM, use this cvadmin command:

```
fail <file system name>
```

To restart an HaUnmanaged FSM or the HaShared FSM:

```
snhamgr mode=locked # on the secondary
snhamgr mode=single # on the primary
cvadmin # on the primary
fail <file system name>
select # repeat until you observe the FSM has started and
activated
snhamgr start # on the primary
```

Question: What Conditions Trigger a Failover in StorNext (File System only)

Answer: There could be several reasons why a failover is triggered. See [HA Resets](#) on page 336 in the HA appendix.

Question: What conditions trigger the voting process for StorNext file system failover?

Answer: Either a StorNext File System client or a Node Status Service (NSS) coordinator (the systems listed in the `fsnameservers` file) can initiate a vote.

An SNFS client triggers a vote when its TCP connection to a File System Manager (FSM) is disconnected. In many failure scenarios this loss of TCP connectivity is immediate, so it is often the primary initiator of a vote.

On Windows systems, StorNext provides a configuration option called *Fast Failover* that triggers a vote as a result of a 3 second FSM heartbeat loss. Occasionally, this is necessary because TCP disconnects can be delayed. There is also an NSS heartbeat between members and coordinators every half second. The NSS coordinator triggers a vote if the NSS heartbeat is absent for an FSM server for three seconds. Because the client triggers usually occur first, the coordinator trigger is not commonly seen.

Question: Why does the Primary MDC keep running without the HaShared file system failing over and without an HA Reset when I pull its only Ethernet cable? The HA Cluster appears to be hung.

In this situation the lab configuration is as follows

```
MDC 1:
Hostname Shasta
10.35.1.110
```

```
MDC 2:
Hostname Tahoe
10.35.1.12
```

```
Two File Systems:
HaShared type: HAFS
HaManaged type: Reno3
```

There are no other client computers.

Shasta is the Primary MDC before the Ethernet cable is pulled.

At one point after the Ethernet was pulled, cvadmin on Tahoe showed:

```
Tahoe:/usr/cvfs/config # cvadmin
StorNext Administrator
Enter command(s)
For command help, enter "help" or "?".
```

List FSS

```
File System Services (* indicates service is in control of FS):
1>*HAFS[0]                located on tahoe:50139 (pid 13326)
```

```
snadmin> select FSM "HAFS"
Admin Tap Connection to FSM failed: [errno 104]: Connection reset
by peer
FSM may have too many connections active.
Cannot select FSS "HAFS"
```

```
snadmin> start reno3
Start FSS "reno3"
Cannot start FSS 'reno3' - failed (FSM cannot start on non-Primary
server)
```

```
snadmin> activate reno3
Activate FSM "reno3"
Could not find File System Manager for "reno3" on Tahoe.
Cannot activate FSS reno3
```

Answer: The reason the failover and HA Reset did not occur is because the HaShared FSM on Shasta continues to be active, and this was detected in the ARB block through the SAN by the FSM on Tahoe.

Here's why. When the LAN connection is lost on Shasta, its active HaShared FSM continues to have one client: the Shasta MDC itself. On Tahoe, an election is held when the LAN heartbeats from Shasta's HAFS FSM stop, and Tahoe's FSM gets one vote from the client on Tahoe. The Tahoe FSM is told to activate, but cannot usurp the ARB with a 1-to-1 tie. So, it tries five times, then exits, and a new FSM is started in its place. You can observe this by running the cvadmin command and watching the FSM's PID change every 20 seconds or so.

With the StorNext 3.5.1 and earlier STONITH HA implementation, other FSMs (not the HaShared FSM) would get tie-breaking votes from the

non-MDC clients and activate, and the first of these to activate would trigger the STONITH reset of the disconnected MDC. In StorNext 4.0 HA allows HaUnmanaged FSMs to failover without resetting the MDC if possible, and HaManaged FSMs do not fail over because they are only started on the primary MDC.

StorNext HA in 4.0 requires configuring at least one more client (other than the MDCs) of the HaShared file system to break the tie. This allows StorNext to determine which MDC has LAN connectivity, and to elect its HaShared FSM with enough votes to usurp control. When an HA Cluster is configured this way, the disconnected MDC (Shasta) will reset because of the usurpation of the HaShared ARB.

After the reboot, CVFS will restart and attempt to elect its HaShared FSM because it is not getting heartbeats from its peer. However, these activation attempts fail to cause a second reset because the HaShared FSM never has enough votes to have a successful usurpation. (You can watch it repeatedly fail to usurp if you can get on the console and run the `cvadmin` command).

But what about the HaManaged Reno3 FSM? HaManaged FSMs are not started until the HaShared FSM activates and puts the MDC in Primary status. You can observe these blocked HaManaged FSMs with the `cvadmin 'fsmlist'` command, which displays the local FSM's internal FSM and process table. A remote FSM's table can also be viewed with `'fsmlist on <MDC name or address>'`.

Finally, the message: 'Admin Tap Connection to FSM failed', is an intermittent response that occurred because the timing of the `cvadmin select` command was during the period after the FSM failed the fifth usurpation attempt and before the FSM was restarted (a ten-second delay). At other times, the response will show an activating FSM. Note that the `cvadmin`-displayed asterisk simply indicates that the FSM has been told to activate, not that it has been successful at usurpation and activation.

Question: Using the same configuration above (Shasta and Tahoe), an HA Reset occurs if I pull the fibre connection from Shasta when it is the Primary MDC, but it takes 30-40 seconds. Why does it take so long?

Answer: When the fibre connection is lost, Shasta's FSMs cannot maintain their brands on their ARB blocks, so the HA timers do not get restarted in the *read, write, restart-timer ARB branding* loop. After five

seconds the timers would expire and reset the MDC. However, there is a second method for resetting the timers that uses the LAN.

Every two seconds, the FSMPM on an MDC with active HA monitored FSMs sends a request to its peer FSMPM with the list of locally active FSMs. The peer gives permission to reset those FSMs' HA timers if it is not activating them, and promises not to activate them for two seconds. When the reply returns within one second of the request, the timers are reset by the FSMPM. This allows the cluster to ride through brief periods when LUNs are too busy to maintain the ARB brand, but otherwise are operating correctly.

So why does the reset occur after 30-40 seconds? After this delay, the HBA returns errors to the FSM, and the FSM quits. When the HaShared FSM quits with the file system mounted locally, an HA Reset occurs to protect databases for the Storage Manager etc.

Question: How do I resolve a StorNext GUI login issue in my high availability environment?

Answer: When CVFS is running on only one MDC of an HA Cluster, attempting to connect a browser to the down MDC's GUI produces a single page with a URL to the running MDC. Simply click the URL and login again.

When CVFS is down on both MDCs, the GUIs on both MDCs present a set of four troubleshooting pages. You can start CVFS from the CLI by running the following command: `service cvfs start`

Or, you can use the StorNext GUI's Manage HA page and click the **Enter Config Mode** button, and then click the **Exit Config Mode** button. When the second step has completed, the HA Cluster will be running in Default-Default mode with MDC redundancy.

Troubleshooting StorNext Installation and Upgrade Issues

This section contains troubleshooting suggestions for issues which pertain to installing or upgrading StorNext.

Question: Does a StorNext installation only support a single ACSLS server?

Answer: If there are multiple libraries that will be accessed by a StorNext instance, they are not controlled by the same ACSLS server. StorNext supports multiple ACSLS servers, but only one library on each server.

Troubleshooting Other Issues

This section contains troubleshooting suggestions for general StorNext issues and other issues which do not fall into another category.

Question: How can I find the Product Serial Number?

Answer: The serial number for StorNext Storage Manager is physically located on the front side of the media kit box. In addition, the administrator initially responsible for the software may have received the serial number through email when either he or she requested license information.

Both StorNext Storage Manager and StorNext File System have serial numbers in the format S/N SN000123 (for example, SN02728).

Note: The serial number is not available through the StorNext application.

Question: A system panic caused connectivity loss to metadata. Is there anything I can do to prevent this from happening?

Answer: Quantum testing has determined that there is an extremely small chance of the metadata controller causing a system failure if metadata or journal activity is interrupted by the loss of connectivity to the metadata LUN (one occurrence during a week of testing by unplugging disk devices from the metadata controller every five minutes).

If a metadata write exceeds the space allocated (due to loss of disk), StorNext may stop all kernel activity on the metadata controller to avoid potential data corruption. This is a timing issue when metadata IO activity is attempted during a tear-down of internal data structures as a result of losing disk space.

You can avoid downtime from this system failure by configuring a redundant metadata controller with the High Availability (HA) feature.

You should recover from this particular failure by bringing the metadata controller back online and running the `cvfsck` command to repair the metadata before allowing clients to remount the file system.

Question: My backups failed with database errors. What caused the failure?

Answer: Check the error logs for possible causes of backup failure. Errors in logs might look similar to this:

*

```
Error while executing select statement; code: 1069,
message: HY000 ERR# 1069 : [Relex][Linter ODBC Driver]
SQLExecDirect: native error #1069, STMT: select
count(*).
```

```
*
```

```
2008-10-25-23:00:24: ERR: /usr/adic/DSM/bin/
snetadump error at line 1490 of snmetadump.c: System
call failed (1): File exists (17): Failed to acquire
snetadump lock.
```

```
*
```

```
ERR: snmetadump returned exit status 2.
```

To remedy the situation, remove all the lock files under “/usr/adic/TSM/internal/locks/” . .

Question: What should I do after a database (Linter) crash?

Answer: After a planned or unplanned sudden stoppage of the Linter database (due to a system crash, power outage, etc.), the database is left in an inconsistent state. This is due to an uncompleted recovery based on the Incomplete Transaction Log. Thus, tools such as testdb will return an errant or misleading error status.

The database recovery process is automatically initiated the next time the Linter Database starts up. Linter must replay the incomplete transactions, after which the database can be gracefully stopped and checked via testdb if desired.

Note: After replaying the Incomplete Transaction Log, the database SHOULD be in a consistent state, eliminating the need for testdb to be initiated.

Question: snbackup is failing with the log message 'Manual cleanup required'. How do I do manual cleanup? The full log message is similar to this:

```
File /usr/adic/database/metadumps/metadump.<FS Name>.gz exists.
This means that journals were in the process of being applied.
Manual cleanup required for file system: <FS Name>
```

Answer: The metadump.<FS Name>.gz file referenced in the log message is created at the start of backup processing to provide an opportunity to restart the backup processing if it does not complete. Failure to complete could happen because of a power outage, hardware

failure or unknown software bug. After successfully completing backup processing, the .gz file is removed.

Normal backup processing of the metadump file involves three steps:

- 1 'Roll' the restore journal to a new sequence number by closing the current `restore_journal-<FS Name>.<Seq Number>` file, renaming it to `restore_journal-<FS Name>.<Seq Number>.completed`, and creating a new `restore_journal-<FS Name>.<Seq Number>` file.
- 2 Apply the 'completed' restore journals to the metadump to bring it up to date with the time of the last rolling of the restore journal, and rename each `restore_journal-<FS Name>.<Seq Number>.completed` file to `restore_journal-<FS Name>.<Seq Number>.applied` as it finishes being applied.
- 3 Save the metadump and applied restore journals to a Storage Manager relation-point directory that exists to save these files on tape or disk.

When a '.gz' file exists, it prevents running the three steps listed above for its related file system to allow the following corrective steps to be taken:

- 1 Change directory to `/usr/adic/database/metadumps`
- 2 Save copies of the metadump file, the .gz file and any `restore_journal` files for the file system
- 3 Take steps to resolve the root cause of the problem if known
- 4 Remove the `metadump.<FS Name>` file, and unzip the `metadump.<FS Name>.gz` file; this should remove the .gz file in the process of unpacking it
- 5 Rename any `restore_journal-<FS Name>.<Seq Number>.applied` files to `restore_journal-<FS Name>.<Seq Number>.completed`
- 6 Run `snbackup`

If the preceding steps fail again and leave another .gz file, send the files saved in step 1 to Quantum for analysis. The following steps will then restore normal backup processing:

- 1 Stop the file system
- 2 Run `cvfsck` on the file system to check for possible metadata inconsistency

- 3 Remove the metadump.<FS Name>.gz file
- 4 Run 'snmetadump -c -d' to create a new metadump
- 5 Start the file system

Note: The preceding steps may take a long time to complete, during which time the file system is not available to clients.



Appendix H

StorNext Offline Notification

StorNext supports a Windows feature called **StorNext Offline Notification**. This feature should be installed only at sites which are using StorNext Storage Manager.

This appendix provides an overview of the feature and describes how to install the application, configure and uninstall the feature. The following topics are addressed:

- [StorNext Offline Notification Overview](#)
- [Installing the Notification Application](#)
- [Starting the Notification Application](#)
- [Configuring the Notification Application](#)
- [Uninstalling the Notification Application](#)

StorNext Offline Notification Overview

The StorNext Offline Notification feature is a Windows only application which helps users from accidentally retrieving offline StorNext files. Retrieving an offline (i.e., truncated) file often takes several minutes, and the user's application is "blocked" while the retrieval is in progress. This feature prevents unintentional access and the subsequent retrieval of offline files by asking the user if the retrieval is desired before continuing.

What is a StorNext Offline File?

A StorNext *offline file* is a file in the StorNext file system which has been moved from primary storage (such as a disk) to secondary storage by the Storage Manager. Usually this involves a storage device such as tape, which is slower than disk. Files are moved to secondary storage according to administrative policies (see Appendix E: Storage Manager Truncation).

Once this has occurred, the StorNext Storage Manager truncates the file and adds the Windows offline attribute to the file. You can identify an offline file in Windows Explorer by the square black box with a clock icon or X icon. Although the offline file is visible and you can view its properties, the data in the file is not physically present on primary storage (although stub files have some data present). The offline attribute should not be confused with Microsoft Windows[®] CIFS-related offline files.

Why Block Access to Offline Files?

Moving files from secondary storage to primary storage is often a lengthy process. The application causing the retrieval will be blocked until the file is restored. The file is usually on a tape, which contributes to the length of the delay. Users may wish to avoid these delays for files which are accidentally accessed. Generating a warning not only helps users understand they are accessing an offline StorNext file, but also why accessing the data in the file is taking so long.

Offline Notification Configuration Options

The StorNext Offline Notification application can be configured to work in one of the following three modes (see configuration instructions):

- 1 Notify the user via a pop-up dialog
- 2 Deny access to all offline files
- 3 Allow access to all offline files

The first mode, notify the user, should be used when the user is allowed to decide whether the file should be retrieved.

The second mode should be used if the workstation user never wants to retrieve offline files. In this case the user's application will fail if it tries to access data in an offline file.

The last mode should be used if unrestricted access to offline files is desired.

How the Notification Feature Operates

If your StorNext Offline Notification feature is set to configuration mode #1, you will see a pop-up any time any application on the Windows system tries to read or write an offline StorNext file. Your application will be blocked until either you respond to this pop-up or the pop-up times out after two minutes. If the pop-up times out, the I/O request will be allowed. The pop-up can occur only with files on a StorNext file system. Offline files on other file systems will not be blocked.

Note: Metadata file operations such as looking at a file's properties or renaming a file will not be blocked.

When a user responds to a pop-up, the response is stored in an internal cache. The cache is 1024 entries long. This cache is used for both "allow" and "deny" entries. The cache is checked before generating a pop-up. If a matching entry is found, the previous answer is used. If the cache is full and a new entry is needed, the oldest entry is removed. Files marked as "deny" will eventually time-out. "Allow" entries do not time-out.

If configuration mode #2 is selected, no pop-up will appear; access to the file will automatically be denied. The application immediately receives the error "Access Denied."

If configuration mode #3 is selected, no pop-up will appear; access to the file is automatically allowed. However, the application's I/O request will be blocked by StorNext until the file is retrieved.

For configuration mode #1: If multiple applications are trying to access the same file at the same time, all applications are blocked, but only one pop-up will appear. If the user wants to allow access to the file, he should select the "Yes" button. All blocked applications will continue to be blocked until the file is retrieved to primary storage. If another application tries to access the file before it is retrieved, it will not cause a new pop-up (unless the file has been removed from the Offline Notification's cache.)

If, on the other hand, the user wants to deny access to the file, the user should select the "No" button. All blocked applications will be denied access and all future requests will be denied access until the file is removed from the Offline Notification's cache.

Note: Responding "Yes" or "No" to any new pop-up will not affect previous responses.

In summary, for configuration mode #1 only, one pop-up dialog will appear for each accessed offline StorNext file. The file is no longer offline when the file is restored to primary storage.

In configuration mode #2, access to an offline file is always immediately denied.

In configuration mode #3, access to an offline file is always allowed. The user will experience a delay while the file is being retrieved, and she will not see a popup.

Installing the Notification Application

The Quantum Offline Notification feature can be installed on the following platforms:

- Windows XP (x86)
- Windows 2003 SP1 (x86)
- Windows 2003 SP1 (x64)
- Windows Vista (x86)
- Windows Vista (x64)
- Windows 2008 Server (x64)
- Windows 2008 R2 Server (x64)
- Windows 7 (x86)
- Windows 7 (x64)

Caution: Do not install this feature on a Windows CIFS server or multi-user machines. This feature should be installed only on single user machines.

Installing onto a Standalone Machine

Locate the appropriate installation package for the machine onto which you want to install. Use `SnfsOfflineNotifyInstall32.zip` for 32-bit machines and `SnfsOfflineNotifyInstall64.zip` for 64-bit machines.

Move the appropriate installation package to the destination machine and unzip it. You will find two files: `SnfsOfflineSetup.exe` and `SnfsOfflineSetup.msi`. Use the following steps to install:

- 1 Log onto the machine as a Local or Domain Administrator. In Windows Explorer start the install by double clicking on `SnfsOfflineSetup.exe`.

On Windows XP platforms and higher Windows versions, an alternate method to start the installation is to right-click on `SnfsOfflineSetup.exe` and select "Run as ..." as shown in [Figure 128](#).

If you select this option, you must log in with the credentials for the Administrator account as shown in [Figure 129](#).

Figure 128 Run as Administrator


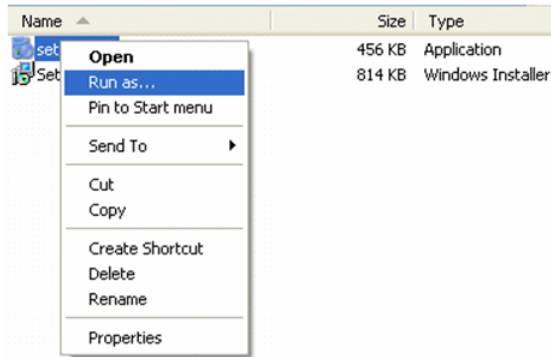


Figure 129 Logging in to the Administrator Account



- 2 The application installer requires .NET updates to function correctly. If you are installing onto a machine without any of the .NET updates, you will be prompted to update to .NET Framework 3.5 as shown in [Figure 130](#).


Figure 130 Installing the .NET Framework

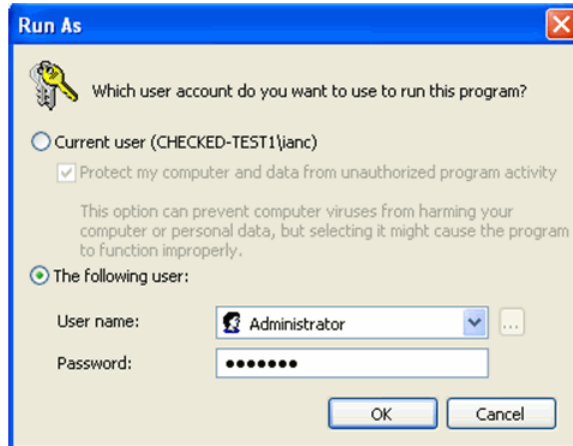

- 3 Read the end user license agreement, and then click **Accept** to continue.

- 4 Wait for the .NET updates to be downloaded and installed. After this process is complete, the Offline Notification Setup Wizard launches.

Figure 131 Offline
Notification Setup Wizard

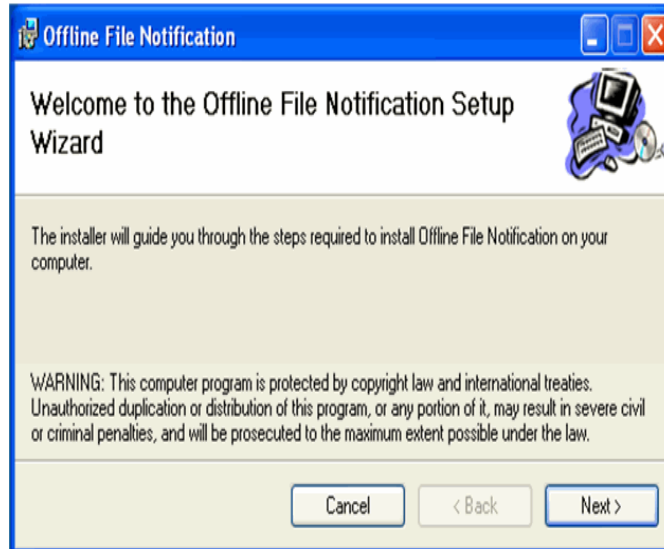


- 5 Click **Next** to continue. The Quantum End User License Agreement window appears.

Figure 132 Quantum End User License Agreement




- 6 Read the end user license agreement. If you accept the terms of the agreement, select **I Agree** and click **Next** to continue. The **Select Installation Folder** window appears. (If you do not accept the terms of the agreement, click **Cancel** to stop the installation.)

Figure 133 Select Installation Folder

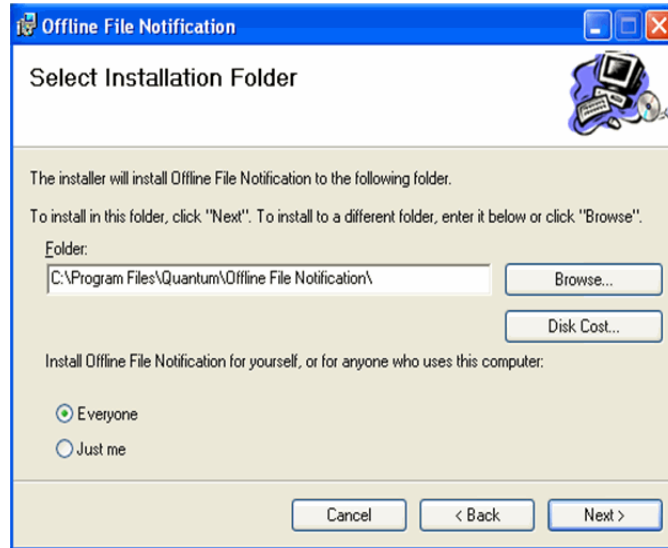

- 7 On the **Select Installation Folder** window, you can do the following:
 - Change the location where the installation resides by clicking **Browse** and navigating to the desired location
 - Specify whether to install Offline Notification for yourself only, or for everyone who uses the computer
- 8 Click **Next** to continue. The **Confirm Installation** window appears.

Figure 134 Confirm Installation

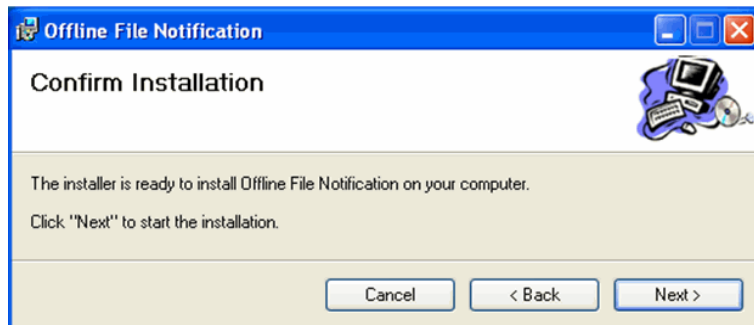


- 9 Before you proceed, make sure you have enough disk space to install the binaries. A minimum of 10MB is required.
- 10 Click **Next** to begin the installation.

Note: This is the last opportunity you will have to cancel the installation, so be certain you want to install before you click **Next**.

After the application is installed, the **Installation Complete** window appears.

Figure 135 Installation Complete

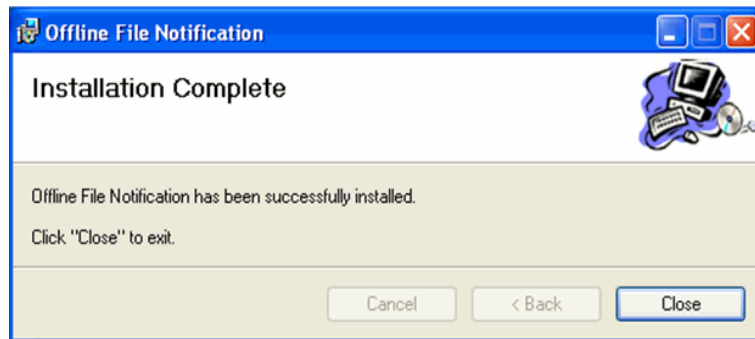

- 11 Click **Close** to exit the installation .


The next time you start your computer, the notification application automatically starts on login.

Starting the Notification Application

The StorNext Offline Notification application starts automatically after you log in, but if necessary you can start it manually.

From the Windows Start menu, choose **All Programs > Quantum > StorNext Offline Notification**. The application starts.

Figure 136 Manual Start

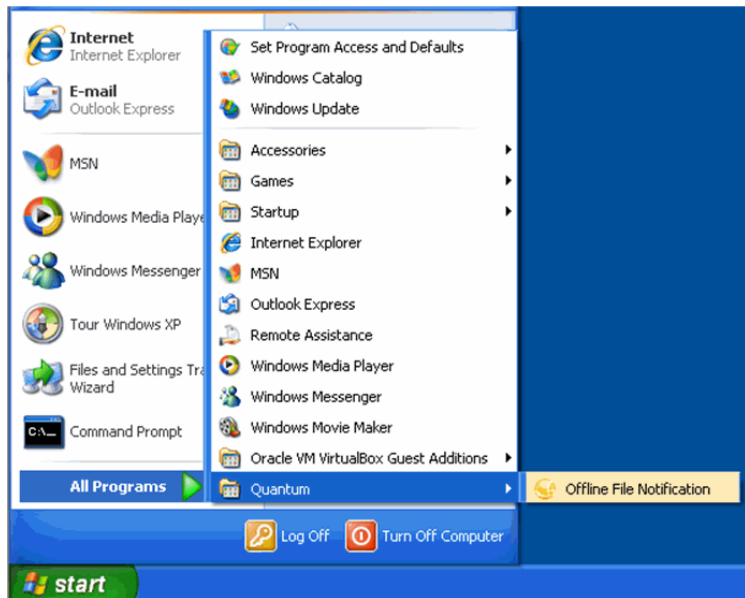

Configuring the Notification Application

When the application is already running, the gold StorNext icon appears in the Windows System Tray (generally found at the lower right corner of the screen).

When you hover the mouse over the gold StorNext icon and right click, three options appear:


- **Preferences:** View and enter application options, view a blocked file list, and view the application log
- **About:** View the StorNext Offline Notification application's current version number and copyright date
- **Exit:** Terminate the application

Setting Application Options

Follow these steps to set preferences for the StorNext Offline Notification application:

- 1 If you have not already done so, move the mouse over the gold StorNext icon in the Windows system tray and right-click. Select **Preferences**. (Alternatively, you can double-click the StorNext icon.)

Figure 137 Application
Options

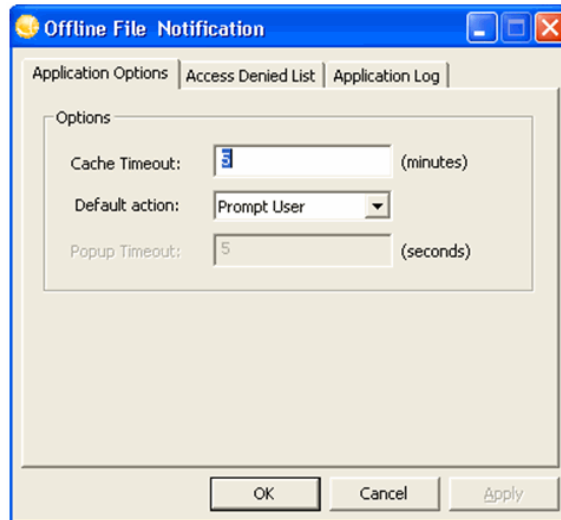

2 View or adjust the following fields on the **Application Options** tab:

- **Cache Timeout:** The value in the **Cache Timeout** field determines how many minutes a file remains in the "Access Denied" list. The range is 1 to 499,999 minutes, and the default is 5 minutes. However, the cache can hold only 1024 entries total for both allowed and denied entries. If the total entries exceeds 1024, the oldest entry is deleted even if the timeout has not been reached.
- **Default Action:** This drop down list provides three options:
 - **Prompt User:** When this option is selected, users are always prompted with a dialog box whether to open an offline file, which means retrieving the file from offline storage such as tape, or from near-line disk storage. Users also have the option of preventing the file from being retrieved.
 - **Always Deny Access:** When this option is selected, access to offline files is always denied, preventing files from being retrieved from offline storage.
 - **Always Allow Access:** When this option is selected files are always allowed to be retrieved from offline storage without prompting the user.

Viewing Access Denied Files


The **Access Denied List** tab displays a list of files that have been prevented from being retrieved from offline storage. (See [Figure 138](#).) The files listed are automatically prevented from being retrieved as long as they remain in the Access Denied list.

These files are automatically removed from this list after they have not been accessed for a period of time (see the **Cache Timeout** field on the **Application Options** tab to determine the timeout period.) If you need to access any file in this list before the timeout period has expired, you must remove it from the list.

To remove files from the list, select the check box next to the desired files and then click **Remove Files**. Only the files selected will be removed from the access denied list.

Note: The **Remove Files** button is disabled when there are no files in the list.

Figure 138 Access Denied List

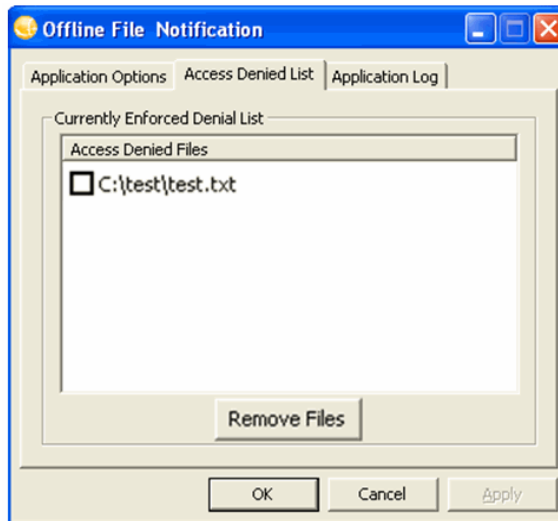


When you select the **Prompt User** option from the **Default Action** dropdown list, files are added to the access denied list after an attempt is made to open an offline file and you prevent the file from being retrieved.

Files are also added to the blocked files list whenever the **Default Action** of **Always Deny Access** is selected. This means that every offline file opened is added to the list and no notification is presented to the user.

Viewing the Application Log

The Application Log tab displays any events that have occurred in the system.

Figure 139 Application log

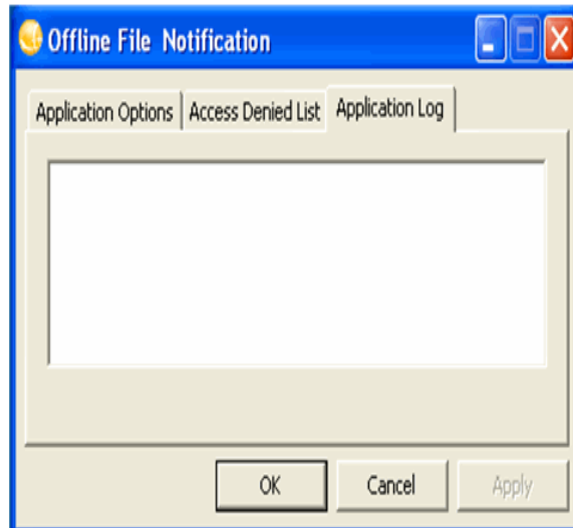

Exiting Application Preferences


When you are finished viewing or setting preferences for the StorNext Offline Notification application, click **OK** to close the Preferences window.

Uninstalling the Notification Application

Follow these steps to uninstall the StorNext Offline Notification application:

- 1 Access the Control Panel by choosing **Control Panel** from the Windows Start menu.
- 2 When the Control Panel launches, open **Add or Remove Programs** (on Windows XP) or **Programs and Features** (on Windows Vista and later platforms).
- 3 When the **Add or Remove Programs** window appears click **Change or Remove Programs** if it isn't already selected.

Figure 140 Removing the Application

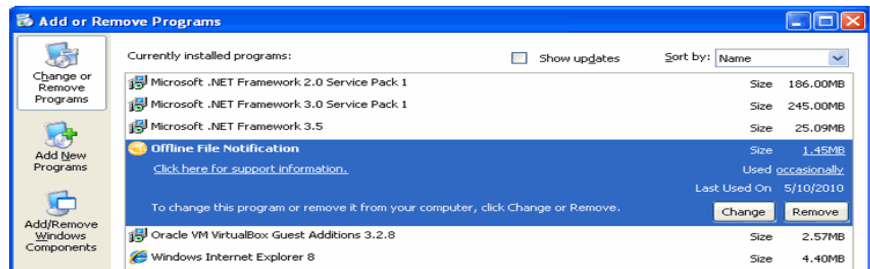

- 4 Locate and select the **StorNext Offline Notification** application. Programs are typically listed alphabetically.
- 5 Click **Remove** to uninstall the application.

Appendix H: StorNext Offline Notification Uninstalling the Notification Application



Appendix I

RAS Messages

RAS messages appear when StorNext encounters an error condition. The RAS window shows symptoms of the condition, plus workarounds you can try to resolve the condition before calling the Quantum Technical Assistance Center.

This appendix shows the different RAS messages you might see. Messages are separated into the following categories:

- [Media and Drive RAS Messages](#)
- [SNFS RAS Messages](#)
- [Other RAS Messages](#)

Media and Drive RAS Messages

This section describes RAS messages that might appear as a result of a media-related error condition, such as no media detected or media format failure.

Figure 141 Possible Drive/
Media Mount Discrepancy RAS

Recommended Actions

Possible Drive/Media Mount Discrepancy

IF	THEN
A service ticket indicates the drive is mounted and the media mounted in the drive cannot be verified:	<p>This is a caution regarding drive and media mounts, and might require user intervention. In this situation, StorNext assigns to the unverified media the barcode (media ID) of the last tape mounted in the drive, and continues to operate.</p> <p>If StorNext cannot dismount this drive at a later time, dismount it manually.</p> <ol style="list-style-type: none"> 1. Check the drive to see if the media has been ejected. 2. If the media has not been ejected, press Eject on the drive. 3. Try to dismount the drive again using the GUI. (From the SNSM home page, choose Library > Dismount from the Media menu.) 4. If the dismount fails using the GUI, dismount the drive using the operator panel on the physical library. 5. Using the GUI, perform an audit to make sure that the Remap Audit checkbox is selected. (From the SNSM home page, choose Library > Audit Library from the Admin menu.)
A service ticket indicates the drive is NOT mounted and the media mounted in the drive cannot be verified:	<ol style="list-style-type: none"> 1. Dismount the drive via the operator panel on the physical library. 2. Using the GUI, perform an audit to making sure that the Remap Audit checkbox is selected. (From the SNSM home page, choose Library > Audit Library from the Admin menu.)
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 142 Tape Drive Alerts
RAS part 1

Recommended Actions

Tape Drive Alerts

Follow the recommendations below after the tape drive has issued a tape alert. Some alerts are fatal and indicate that the drive is no longer useful. Other alerts indicate that user intervention (such as cleaning) will correct the problem. Note the flag number from the ticket for use in troubleshooting.

The host application should have received the same tape alert message. Not all host applications respond with the same behavior.

The recommendations below are based on best practices for a typical host application.

IF	THEN
Flag 1 (01h) - Read warning Flag 2 (02h) - Write warning	Contact the Quantum Technical Assistance Center .
Flag 3 (03h) - Hard Error The problem could be the tape or the drive. The drive cannot isolate the source.	<ol style="list-style-type: none"> 1. Close the ticket and retry the read/write operation on the original drive and media. 2. Monitor operation for a reoccurrence of the ticket. 3. Insert the suspect media into an alternate drive and retry the read/write operation. 4. If the error follows the media, retire the media. 5. If the error stays with the drive, contact the Quantum Technical Assistance Center to replace the drive.
Flag 4 (04h) - Media	<ol style="list-style-type: none"> 1. Copy the data to another piece of media. 2. Remove the original media from the library and discard.
Flag 5 (05h) - Read Failure Flag 6 (06h) - Write Failure The problem could be the tape or the drive. The drive cannot isolate the source.	<ol style="list-style-type: none"> 1. Close the ticket and retry the read/write operation on the original drive and media. 2. Monitor operation for a reoccurrence of the ticket. 3. Insert the suspect media into an alternate drive and retry the read/write operation. 4. If the error follows the media, retire the media. 5. If the error stays with the drive, contact the Quantum Technical Assistance Center to replace the drive.
Flag 7 (07h) - Media life	<ol style="list-style-type: none"> 1. Copy the data to another piece of media. 2. Remove the original media from the library and discard.
Flag 9 (09h) - Write protect	If the media is used for writing data, adjust the write-protect tab on the media and clear the write-protect setting.
Flag 10 (0Ah) - No removal	The prevent media removal flag is on, so it must be turned off.
Flag 11 (0Bh) - Cleaning media	If cleaning media does not reside in the cleaning media pool, move it there.

Figure 143 Tape Drive Alerts
RAS part 2

Flag 12 (0Ch) - Unsupported format	The media is not supported by the drive. If the media is blank, remove it. Otherwise, contact the Quantum Technical Assistance Center .
Flag 13 (0Dh) - Recoverable snapped tape	Contact the Quantum Technical Assistance Center .
Flag 14 (0Eh) - Unrecoverable snapped tape	
Flag 15 (0Fh) - Memory chip in cartridge failure	<ol style="list-style-type: none"> 1. Write protect the media. 2. Copy the data to a new piece of media. 3. Discard the old media.
Flag 16 (10h) - Forced eject	Investigate whether the StorNext administrator's actions might have initiated an eject operation.
Flag 17 (11h) - Read-only format	The loaded cartridge is a read-only type in this drive. If the media contains data, write protect it.
Flag 18 (12h) - Tape directory corrupted on load	The tape directory must be rebuilt. Contact the Quantum Technical Assistance Center .
Flag 19 (13h) - Nearing media life	<ol style="list-style-type: none"> 1. Copy the data to another piece of media. 2. Remove the original media from the library and discard.
Flag 20 (14h) - Clean now	Clean the drive.
Flag 21 (15h) - Clean periodic	
Flag 22 (16h) - Expired cleaning media	<ol style="list-style-type: none"> 1. Remove the media. 2. Add new media.
Flag 23 (17h) - Invalid cleaning media	
Flag 24 (18h) - Retension requested	Contact the Quantum Technical Assistance Center .
Flag 25 (19h) - Dual-port interface error	
Flag 26 (1Ah) - Cooling fan failure	
Flag 27 (1Bh) - Power supply failure	
Flag 28 (1Ch) - Power consumption	
Flag 29 (1Dh) - Drive maintenance	
Flag 30 (1Eh) - Hardware A	Contact the Quantum Technical Assistance Center .
Flag 31 (1Fh) - Hardware B	
A hardware error has occurred that should be captured and returned for failure analysis.	

Figure 144 Tape Drive Alerts
RAS part 3

Flag 32 (20h) - Interface	<ol style="list-style-type: none"> 1. Check the cabling between the library and the attached tape library. 2. If the problem is unresolved, contact the Quantum Technical Assistance Center.
<p>Flag 33 (21h) - Eject media</p> <p>The drive has experienced an issue that can be resolved by unloading and reloading media.</p>	<ol style="list-style-type: none"> 1. Retry the operation. 2. If the problem persists, contact the Quantum Technical Assistance Center.
Flag 34 (22h) - Firmware download via SCSI or FC has failed	StorNext does not support user firmware updates. Contact the Quantum Technical Assistance Center for upgrade information.
<p>Flag 35 (23h) - Drive Humidity</p> <p>Flag 36 (24h) - Drive Temperature</p> <p>Flag 37 (25h) - Drive Voltage</p> <p>Flag 38 (26h) - Predictive Failure</p> <p>Flag 39 (27h) - Diagnostics Required</p> <p>Flag 40 (28h) - Loader hardware A</p> <p>Flag 41 (29h) - Loader stray tape</p> <p>Flag 42 (2Ah) - Loader Hardware B</p> <p>Flag 43 (2Bh) - Loader door</p> <p>Flag 44 (2Ch) - Loader hardware C</p> <p>Flag 45 (2Dh) - Loader magazine</p> <p>Flag 46 (2Eh) - Loader predictive failure</p>	Contact the Quantum Technical Assistance Center .
Flag 51 (33h) - Tape directory invalid at unload	The tape directory must be rebuilt. Contact the Quantum Technical Assistance Center .
<p>Flag 52 (34h) - Tape system area</p> <p>Flag 53 (35h) - Tape system area read failure</p> <p>Flag 54 (36h) - No start of data</p> <p>Flag 55 (37h) - Loading failure</p>	Contact the Quantum Technical Assistance Center .
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .

Figure 145 Drive Reported
Drive Error RAS

Recommended Actions

Tape Drive - Drive Reported Drive Error

IF	THEN								
The service ticket indicates the tape drive reported a drive error:	<ol style="list-style-type: none"> 1. Check the tape library's control panel to determine if any other errors exist. <ul style="list-style-type: none"> ○ If other errors exist, correct them before proceeding. Refer to the documentation for this type of tape library. ○ If no other errors exist and the media is mounted, dismount the media. 2. If the media is not dismounted, check the drive to see if it has been ejected. 3. If the media has not been ejected: <ul style="list-style-type: none"> ○ Press the Eject button on the drive to eject the media. ○ Try to dismount the media again. 								
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <table style="margin-left: 20px;"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 146 Cleaning of Drive
Failed RAS

Recommended Actions	
Tape Drive - Cleaning of Drive Failed	
IF	THEN
Drive cleaning failed:	<p>The cleaning media might be defective or expired, or there is a problem with the drive.</p> <ol style="list-style-type: none"> 1. Replace existing cleaning media. 2. Attempt to clean the drive using the StorNext GUI. (From the SNSM home page, choose Drive > Clean Drive from the Admin menu.) 3. If the drive still indicates that cleaning is required, contact the Quantum Technical Assistance Center using the contact information below.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 147 Wrong Firmware Level/Invalid Drive Type RAS

Recommended Actions

Tape Drive - Wrong Firmware Level/Invalid Drive Type

IF	THEN								
The service ticket indicates the tape drive's firmware level is wrong:	Contact the Quantum Technical Assistance Center using the contact information below.								
The service ticket indicates the drive type is invalid:	Disconnect the drive, and then contact the Quantum Technical Assistance Center using the contact information below.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> <p>OR</p> <ol style="list-style-type: none"> 3. If you are a properly-trained service professional, perform the procedures required for this type of tape library. 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 148 Tape Drive -
Reported Media Error RAS

Recommended Actions	
Tape - Drive Reported Media Error	
IF	THEN
The drive reported a media error (sense data, tape alert):	<ol style="list-style-type: none"> 1. Check the tape library's control panel to determine if any other errors exist. <ul style="list-style-type: none"> ○ If other errors exist, correct them before proceeding. Refer to the documentation for this type of tape library. ○ If no other errors exist and the media is mounted, dismount the media. 2. If the media is not dismounted, check the drive to see if it has been ejected. 3. If the media has not been ejected: <ul style="list-style-type: none"> ○ Press the Eject button on the drive to eject the media. ○ Try to dismount the media again.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <ul style="list-style-type: none"> In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 149 Cleaning Media Expired RAS

Recommended Actions

Cleaning Media - Expired

IF	THEN
The service ticket indicates the cleaning media for the tape library has expired:	<ol style="list-style-type: none"> 1. If the tape library has exported the cleaning media to the entry port, remove the cleaning media. 2. If the tape library has NOT exported the cleaning media to the entry port, export it. 3. If no other cleaning media is available in the tape library, add a new one.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 150 Duplicate Physical Media Found RAS

Recommended Actions

Duplicate Physical Media Found

IF	THEN
If the service ticket indicates that duplicate physical media has been found:	Remove the duplicate media using the library's operator panel. Refer to your library's reference manual for operator panel instructions.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 151 Storage Disk Taken Offline RAS

Recommended Actions	
Storage Disk Taken Offline	
IF	THEN
A storage disk exceeds its failure threshold and is taken offline.	<ol style="list-style-type: none"> 1. Verify that the file system can be reached (NFS), and is still mounted and accessible. 2. If the storage disk is located on a CFVS file system, check the File System Manager (FSM).
A deduplication-enabled storage disk is taken offline:	<ol style="list-style-type: none"> 1. Try bringing the dedup sdisk back online. 2. If this doesn't work, run the health checks on the media to validate the blockpool used for deduplication. After verifying, bring the dedup sdisk back online. 3. If the storage disk is located on a CFVS file system, check the File System Manager (FSM). <p>(The above recommended actions apply only to deduplication-enabled storage disks.)</p>
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00900 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

SNFS RAS Messages

This section describes RAS messages that might appear as a result of a file system-related error condition, such as an I/O error or a missing LUN.

Figure 152 Configuration Not Supported RAS

Recommended Actions	
<h3>Configuration Not Supported</h3>	
IF	THEN
The file system configuration file is corrupt, missing, or causes a syntax error to be reported:	Verify that a valid file system configuration file exists for the specified file system. Also, check the system logs for additional configuration file error details.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 153 Label Validation Failure RAS

Recommended Actions	
<h3>Label Validation Failure</h3>	
IF	THEN
Disk label verification has failed:	Use the cvlabel command to check for corrupt, incorrect, or missing disk labels. Also inspect system logs for I/O errors, and check SAN integrity.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 154 Connection Rejected RAS

Recommended Actions									
Connection Rejected									
IF	THEN								
A client connection has been rejected unexpectedly:	Check the system logs to determine the root cause. If the problem is caused by exceeding the maximum number of connections, increase MaxConnections in the file system configuration file.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 155 File System Failover RAS

Recommended Actions									
File System Failover									
IF	THEN								
A file system failed over unexpectedly:	Inspect the system log and the FSM cvlog to determine the root cause.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 156 I/O Error RAS

Recommended Actions									
I/O Error									
IF	THEN								
An I/O error has occurred:	Check LUN and disk path health, as well as overall SAN integrity. Also, inspect the system logs for driver-level I/O errors.								
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 157 Journaling Error Detected RAS

Recommended Actions									
Journaling Error Detected									
IF	THEN								
Journal recovery has failed:	Contact the Quantum Technical Assistance Center and open a service request.								
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 158 SNFS License
Required RAS

Recommended Actions	
<h3>SNFS License Required</h3>	
IF	THEN
You receive a warning that your SNFS license will expire within 48 hours:	Contact the Quantum Technical Assistance Center to obtain a valid license.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 159 SNFS License
Failure RAS

Recommended Actions	
<h3>SNFS License Failure</h3>	
IF	THEN
You receive a warning that your SNFS license will expire within 48 hours:	Contact the Quantum Technical Assistance Center to obtain a valid license.
OR	
Your SNFS license has expired:	
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 160 LUN Mapping Changed RAS

Recommended Actions									
<h2>LUN Mapping Changed</h2>									
IF	THEN								
A disk scan has detected a change in an existing LUN path:	If the LUN mapping change is unexpected, run the cvadmin "disks" and "paths" commands to confirm that all LUN paths are present. Also, check SAN integrity and inspect the system logs to determine the root cause.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 161 Communication Failure RAS

Recommended Actions									
<h2>Communication Failure</h2>									
IF	THEN								
A client has disconnected unexpectedly:	Check the health of the network used for metadata traffic. Also, inspect the FSM log and the system logs on the clients and metadata controller to determine the root cause.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 162 Metadata Inconsistency Detected RAS

Recommended Actions									
Metadata Inconsistency Detected									
IF	THEN								
The FSM has detected a metadata inconsistency:	Check SAN integrity and inspect the system logs for I/O errors. If the SAN is healthy, run <code>cvfsck</code> on the affected file system at the earliest convenient opportunity.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 163 Bad File System Metadata Dump RAS

Recommended Actions									
Bad File System Metadata Dump									
IF	THEN								
The system has detected that a new metadata dump is required:	Run <code>snmetadump</code> for the affected file system as soon as possible. Note: This condition could occur if <code>cvfsck</code> or <code>cvupdatefs</code> was recently run, or if a Restore Journal error occurred and the Restore Journal was shut down.								
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the QuantumTechnical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 164 Metadata Dump Failure RAS

Recommended Actions									
Metadata Dump Failure									
IF	THEN								
The system has detected either a stale or missing metadata dump for a managed file system.	<p>StorNext backup and restore operations (and also some file system scanning operations such as a rebuild policy.) require the existence of a current, valid metadata dump. Use the following procedure to perform a metadata dump.</p> <p>Unmount the system:</p> <ol style="list-style-type: none"> From the SNFS Home Page, choose Unmount from the Admin menu. Select from the Mounted File Systems list the file system to unmount. Click Unmount. <p>Stop the file system:</p> <ol style="list-style-type: none"> From the SNFS Home Page, choose Start/Stop File System from the Admin menu. Select from the Active File Systems list the file system you want to stop. Click Stop. <p>Perform the metadata dump:</p> <ol style="list-style-type: none"> From the SNFS Home Page, choose Metadata Dump from the Admin menu. Select the file system on which to perform the metadata dump. Click Apply. <p>After the dump is complete, restart and mount the file system.</p>								
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem has NOT been resolved:	<ol style="list-style-type: none"> Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. Contact the Quantum Technical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 165 File System or Metadata Capacity Warning RAS

Recommended Actions									
File System or Metadata Capacity Warning									
IF	THEN								
You receive a warning about your file system exceeding <code>FsCapacityThreshold</code> :	Add additional storage capacity or reduce file system usage.								
You receive a warning that the file system is running out of metadata capacity:	Add additional metadata storage capacity.								
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .								
The problem is NOT resolved:	<ol style="list-style-type: none"> Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. Contact the Quantum Technical Assistance Center. <table border="0"> <tr> <td>In the USA:</td> <td>1+800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1+800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1+800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Figure 166 File Processing Failure RAS

Recommended Actions	
File Processing Failure	
IF	THEN
A failure occurred while trying to process an internal file.	See the error details for more complete information about the failure. Possible reasons for the failure: <ul style="list-style-type: none"> • An attempt to roll the file (close the current file and open a new one for use) failed • A corruption in the file was detected <p>In general, the system can continue without intervention after one of these errors occurs. However, if you experience these failures on a regular basis it could be indicative of a more serious situation, and you should contact the Quantum Technical Assistance Center.</p>
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 167 Missing LUNs RAS

Recommended Actions	
Missing LUNs	
IF	THEN
A client fails to mount because a LUN is missing:	Check the system logs to determine the root cause. Run the cvadmin "disks" and "paths" commands, and then check for missing LUNs.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 168 Disk Space Allocation Failure RAS

Recommended Actions

Disk Space Allocation Failure

IF	THEN
A disk space allocation has failed:	Free up disk space by removing unnecessary disk copies of files, or add disk capacity. If the allocation failure is unexpected, contact the Quantum Technical Assistance Center.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <p>In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support</p>

Figure 169 System Resource Failure RAS

Recommended Actions

System Resource Failure

IF	THEN
SNFS has failed to allocate memory:	Determine the cause of memory depletion and correct the condition by adding memory or paging space to your system. If SNFS is using excessive amounts of memory, adjusting the configuration parameters might resolve the problem. For information about adjusting parameters, refer to the Release Notes, the <code>cvfs_config(4)</code> and <code>mount_cvfs(1)</code> man pages, and the SNFS Tuning Guide.
The FSM detects exhaustion of a resource controlled by an adjustable parameter:	Modify the file system configuration file as needed, and then restart the file system.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <p>In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support</p>

Figure 170 Affinity Configuration Violations RAS

Recommended Actions

Affinity Configuration Violations

When a configuration violation occurs in the StorNext application, it must be repaired by stopping the system, editing the configuration, and then restarting the system. Below are specific configuration violations and recommended actions to repair each specific issue.

IF	THEN
There is more than one affinity on one stripe group:	<p>You cannot have more than one affinity on one stripe group.</p> <p>Examine all DSM configuration files (/usr/adic/DSM/config/*.cfg). In any file that has the Data Migration Flag set to YES, and for every stripe group with more than one affinity, remove the extra affinities.</p>
The file system does not contain at least one non-exclusive data stripe group:	<p>The file system has at least one affinity, and therefore must contain at least one non-exclusive data stripe group.</p> <p>Examine all DSM configuration files (/usr/adic/DSM/config/*.cfg). In any file that has the Data Migration Flag set to YES, make sure at least one stripe group has the following configuration:</p> <pre> Metadata No Journal No Exclusive No </pre>
A file system contains both data stripe groups with affinities and data stripe groups without affinities:	<p>A file system can contain data stripe groups with affinities, or data stripe groups without affinities, but it cannot contain both.</p> <p>Examine all DSM configuration files (/usr/adic/DSM/config/*.cfg). In any file that has the Data Migration Flag set to YES, make sure that either every stripe group has an affinity, or that every stripe group does not have an affinity.</p>
There are more than two affinities across all managed file systems:	<p>No more than two affinities across all managed file systems are allowed.</p> <p>Examine all DSM configuration files (/usr/adic/DSM/config/*.cfg). For all of the configuration files that have the Data Migration Flag set to YES, change the stripe group Affinities so there are no more than a total of two.</p>
The number of affinities on managed file systems do not match for TSM and CVFS:	<p>Examine all DSM configuration files (/usr/adic/DSM/config/*.cfg). For all of the configuration files that have the Data Migration Flag set to YES, make sure the complete list of affinities matches the TSM affinity names found in the TIERDEF database table.</p>
TSM does not recognize the CVFS managed file system affinity name:	<p>Examine all DSM configuration files (/usr/adic/DSM/config/*.cfg). For all of the configuration files that have the Data Migration Flag set to YES, make sure the complete list of affinities matches the TIERNAME fields found in the TSM TIERDEF database table.</p>
An affinity in a policy class is not found in the TIERDEF table:	<p>Make sure the non-zero elements in the TIERLIST field of the TSM CLASSDEF tables all match the TIERNUM fields in the TSM TIERDEF table.</p>
The problem IS resolved:	<p>Close the service ticket. Refer to Closing Service Tickets.</p>
The problem has NOT been resolved:	<ol style="list-style-type: none"> Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. Contact the Quantum Technical Assistance Center. <p>In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support</p>

Figure 171 Quota Limit or Fragmentation Warnings RAS

Recommended Actions	
Quota Limit or Fragmentation Warnings	
IF	THEN
You receive a warning that the quota hard limit is reached for a user:	Either increase the user's quota, or notify the user.
You receive a warning that fragmentation has been detected in an inode:	<ol style="list-style-type: none"> 1. Consult the snfsdefrag man page for instructions on performing fragmentation analysis and defragmenting files. 2. See ExtentCountThreshold in the cvfs_config documentation for information on adjusting this RAS event.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem is <u>NOT</u> resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <ul style="list-style-type: none"> In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 172 Shutdown Error RAS

Recommended Actions	
Shutdown Error	
IF	THEN
SNFS shutdown errors have occurred:	Inspect the file system and system logs to determine the root cause.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <ul style="list-style-type: none"> In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 173 Initialization Failure RAS

Recommended Actions	
Initialization Failure	
IF	THEN
An FSM or FSMPM process has failed to start.	Correct the system configuration as suggested by the event detail, or examine system logs to determine the root cause.
OR	If the detail text suggests a problem with starting the fsmppm process, run "cvlabel -f" to verify that disk scanning is working properly.
An attempt to mount an SNFS file system has failed:	
All CVFS file systems are not mounted:	Mount the file systems that are not mounted.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 174 SNFS I/O Error RAS

Recommended Actions	
I/O Error	
IF	THEN
An I/O error has occurred:	Check LUN and disk path health, as well as overall SAN integrity. Also, inspect the system logs for driver-level I/O errors.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 175 Port Failure

Recommended Actions	
SNFS Port Failure	
IF	THEN
SNFS cannot resolve the IP address of the coordinator <name server> after 600 seconds.	Check the name in the fsnameservers file.
The name server <name server> (<IP address>) heartbeat is lost for 600 seconds.	The name server may not be reachable. Verify that the name server machine is running, can be reached on the network, and that SNFS is running on it.
The problem is NOT resolved.	Contact the Quantum Technical Assistance Center. In the USA: 1+900-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Other RAS Messages

This section describes RAS messages that might appear as a result of an error condition that is not related to media or the file system.

Figure 176 Checksum Error
RAS

Recommended Actions

Checksum Error

When a checksum error occurs during a file retrieve operation, the error is generally due to a hardware failure in a tape drive, host bus adapter, or the cabling between them. The error can also be caused by damaged media. If the checksum error is due to a drive or media failure, there might be an associated "Tape Alert" service ticket.

IF	THEN
The drive or media is suspected:	<ol style="list-style-type: none"> 1. Close the ticket and retry the read/write operation on the original drive and media. 2. Monitor operation for a reoccurrence of the ticket. 3. Insert the suspect media into an alternate drive and retry the read/write operation. 4. If the error follows the media, retire the media. 5. If the error stays with the drive, contact the Quantum Technical Assistance Center to replace the drive.
The media is bad:	<ol style="list-style-type: none"> 1. Copy the data to another piece of media. 2. Remove the original media from the library and discard.
The host bus adapter is suspected:	<ol style="list-style-type: none"> 1. Check the host's system log for HBA-related errors. 2. Replace the HBA with a spare. 3. Close the ticket and retry the read/write operation on the original drive and media. 4. Monitor operation for a reoccurrence of the ticket. 5. If the problem is unresolved, contact the Quantum Technical Assistance Center.
Cabling is suspected:	<ol style="list-style-type: none"> 1. Check the cabling between the drive and the host bus adapter. 2. If the problem is unresolved, contact the Quantum Technical Assistance Center.
There is an associated "Tape Alert" service ticket:	<ol style="list-style-type: none"> 1. Follow the instructions in the Tape Alert service ticket. 2. If the problem is unresolved, contact the Quantum Technical Assistance Center.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 177 Troubleshooting the StorNext Software RAS

Recommended Actions	
Troubleshooting the StorNext Software	
IF	THEN
A service ticket indicates software issues including incorrect firmware levels:	<ol style="list-style-type: none"> 1. Capture the StorNext system state. Refer to Capturing a System State. 2. Download the captured state. Refer to Downloading a System State Capture. 3. Stop and restart the StorNext software.
An I/O error occurs on a path in a multipath environment (LUN communication failure):	Check the system and RAID logs for SAN integrity.
A process or task dies and does not restart:	Check the FSM logs and system logs to determine the root cause. If possible, take corrective action. If you suspect a software bug, contact the Quantum Technical Assistance Center.
You receive a message that the FSM is delayed or the file system is not responding:	Verify that the FSM process for the specified file system is running on the metadata controller. Also check the health of the metadata network.
A health check operation is launched with invalid command arguments:	<p>Contact the Quantum Technical Assistance Center.</p> <p>To temporarily disable the invalid health check operation until a fix is delivered, follow these steps:</p> <ol style="list-style-type: none"> 1. Locate the 'filelist' file under /usr/adic that contains the health check entry for the failed operation. 2. Place a '#' character at the front of that health check entry line.
<p>You receive an "Internal Software Error" message describing one of the following conditions:</p> <ul style="list-style-type: none"> • Process initialization failed • A database operation failed • An unhandled software error has occurred • A CLI command failure has caused the process that invoked it to abort • A Blockpool Verify command failed to complete successfully 	<ol style="list-style-type: none"> 1. If you suspect there might have been a temporary problem with system resources, rerun the health check operation via the StorNext GUI's Health Check Service. 2. If the problem persists, contact the Quantum Technical Assistance Center.
<p>You receive one of the following "TSM Control Error" messages:</p> <ul style="list-style-type: none"> • The TSM software could not be started • The TSM software could not be stopped 	<ol style="list-style-type: none"> 1. Try restarting the TSM software. (On the command line, run "tmsstop; tmsstart") If restarting succeeds, rerun the Health Check using the StorNext GUI. 2. If restarting does not succeed, contact the Quantum Technical Assistance Center.
You cannot connect to the SNAPI server process:	<ol style="list-style-type: none"> 1. Restart the system software. 2. Run the Health Check service using the StorNext GUI. 3. If the problem persists, contact the Quantum Technical Assistance Center.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem is <u>NOT</u> resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <p>In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support</p>

Figure 178 Software Resource Violations RAS

Recommended Actions	
Software Resource Warning	
IF	THEN
If the service ticket indicates that no media is found to satisfy the request:	<ul style="list-style-type: none"> Add more media to StorNext <p>OR</p> <ul style="list-style-type: none"> Check for suspect media
A StorNext file system has exceeded the maximum allowable threshold for percent used:	Identify any obsolete or unneeded files in that file system. Either delete those files or move them to a different file system.
A tape drive is in an unusable state:	<ol style="list-style-type: none"> If this is a new or temporary problem, run the <code>execute</code> command to change the tape drive state. If the problem persists, restart StorNext. If the problem still persists, contact the Quantum Technical Assistance Center.
A tape drive is off-line:	<ol style="list-style-type: none"> If this is a new or temporary problem, run the <code>execute</code> command to change the tape drive state. If the problem keeps occurring, contact the Quantum Technical Assistance Center.
Not enough media are available for TSM Data Policies:	Add more media to the StorNext system.
A policy class does not store automatically and is not scheduled:	<ul style="list-style-type: none"> Change the policy class so that 'Store Automatically' is set to 'Yes' <p>OR</p> <ul style="list-style-type: none"> Add the policy to the list of scheduled features, specifying the <policyClassName> as the Option
A device path could not be resolved:	<ol style="list-style-type: none"> Verify that the device is powered on. Verify that the device has not registered any errors. Verify that the device is physically connected by checking all cabling and connections. Verify that the device is correctly mapped to the host server. (Caution: If your system configuration allows you to logically remap all devices, ensure that StorNext has been stopped prior to beginning remapping. Restart StorNext after remapping is complete.)
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets
The problem has NOT been resolved:	<ol style="list-style-type: none"> Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 179 Vault Failure RAS

Recommended Actions	
Vault Failure	
IF	THEN
The problem indicates that vaulting has failed:	<ol style="list-style-type: none"> 1. Capture the StorNext system state. Refer to Capturing a System State. 2. Download the captured state to a local or network drive. Refer to Downloading a System State Capture. 3. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support

Figure 180 Robotics - Not Ready RAS

Recommended Actions	
Robotics - Not Ready	
IF	THEN
The service ticket indicates that the tape library's robotics is not ready:	<ol style="list-style-type: none"> 1. Verify that the tape library is online and ready. 2. Verify that the tape library is online and ready through the StorNext GUI. 3. Verify that the tape library is connected to the server.
No archives or storage disks exist:	Use the StorNext GUI to add at least one physical archive or storage disk to the system.
An archive is off-line:	<ol style="list-style-type: none"> 1. Use <code>searchivevazy</code> to change the archive state to online. 2. Run <code>zestate</code> and verify that all drives are listed correctly. In particular, no drive state should be listed as 'Unknown.' 3. If running <code>zestate</code> shows 'Unknown' for every drive state, do the following: <ul style="list-style-type: none"> o Run <code>zestatop: zestatart</code> to reinitialize software communication pathways. o Repeat step 2 above.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> 1. Note any codes displayed on the tape library's control panel. 2. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 3. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support <p>OR</p> <ol style="list-style-type: none"> 4. If you are a properly-trained service professional, perform the procedures required for this type of tape library.

Figure 181 Robotics - Move Failure RAS

Recommended Actions

Robotics - Move Failure

IF	THEN
The service ticket indicates that the tape library's robotics has experienced a move failure:	<ol style="list-style-type: none"> 1. Verify that the tape library is online and ready. 2. Verify the state of the tape library component that failed. 3. Verify the media is in the slot. 4. Verify the drive/library is online using the StorNext GUI.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Note any codes displayed on the tape library's control panel. 2. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 3. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support <p>OR</p> <ol style="list-style-type: none"> 4. If you are a properly-trained service professional, perform the procedures required for this type of tape library.

Figure 182 Robotics - Wrong Firmware Level/Invalid Library Type RAS

Recommended Actions

Robotics - Wrong Firmware Level/Invalid Library Type

IF	THEN
The service ticket indicates the tape library's firmware level is wrong:	Use the tape library's control panel to verify the firmware level for this release against the StorNext Release Notes . Contact your library vendor to obtain the proper firmware.
The service ticket indicates the tape library type is invalid:	Disconnect the tape library and contact the Quantum Technical Assistance Center using the contact information below.
The problem <u>IS</u> resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has <u>NOT</u> been resolved:	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. In the USA: 1+800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support <p>OR</p> <p>If you are a properly-trained service professional, perform the procedures required for this type of tape library.</p>

Figure 183 Backup Errors RAS

Recommended Actions	
Backup Errors	
<p>The backup status can be obtained on any currently running or last completed backup by running the <code>sbackup -s</code> command. The first line shows the overall status; the status line contains the same string viewed in the RAS message. The log file associated with that backup is shown beneath the status line, and shows any errors that have occurred. All errors in the log file are prefaced with ERR.</p> <p>Below is a list of individual errors and recommended actions.</p>	
IF	THEN
Backup execution could not complete:	This is a generic failure message. Run the <code>sbackup -s</code> command and examine the failure.
There was an error connecting to database:	The database has not been started or is in a state that does not allow communication. Restart the database software.
There was an error opening the <code>fs_sysparm</code> file:	The <code>/usr/adc/TSM/config/fs_sysparm</code> file cannot be located. Contact the Quantum Technical Assistance Center for assistance.
TSM software is not running:	The StorNext TSM software is down. Restart the software.
The backup staging directory could not be created:	<ul style="list-style-type: none"> Verify that the file system used by the <code>sbackup</code> command is active and mounted. Make sure <code>root</code> user has permission to create new directories.
The system could not store exclude on <code><file system></code> :	Contact the Quantum Technical Assistance Center .
The backup temporary directory could not be created:	<ul style="list-style-type: none"> Verify that the file system used by the <code>sbackup</code> command is active and mounted. Make sure <code>root</code> user has permission to create new directories.
There were invalid arguments:	Check the usage by issuing the <code>sbackup -h</code> command, or through the man page.
Application of metadata journals failed:	The metadata for a file system might be corrupt. Contact the Quantum Technical Assistance Center .
The file <code>/usr/adc/DSM/config/tsm1st</code> is missing:	A configuration file is missing from the file system software directory. Contact the Quantum Technical Assistance Center .
The file <code>/usr/adc/DSM/config/<file system>.cfg</code> is missing:	A configuration file is missing from the file system software directory. Correct or provide a configuration file for this file system.
The metadata dump file for <code><file system></code> is missing:	A new file system metadata dump must be generated for the file system. Use the GUI to create the metadata dump file. (From the SNFS Home Page, choose Metadata Dump from the Admin menu.)
<ul style="list-style-type: none"> All copies of files not stored: Store files to media failed. Store failed for backup files: 	<p>Run either the <code>sbackup -s</code> or the <code>sbackupreport</code> command, or through the GUI run a Backup Report to see which copy of the backups failed. Check all media and archives associated with that copy to determine the failure.</p> <p>To run a Backup Report from the GUI:</p> <ol style="list-style-type: none"> Access the SNFS home page. Choose Backups from the Reports menu.
The problem IS resolved:	Close the service ticket. Refer to Closing Service Tickets .
The problem has NOT been resolved:	<ol style="list-style-type: none"> Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. Contact the Quantum Technical Assistance Center. <p>In the USA: 1-800-284-5101 UK, France and Germany: 00800 4 QUANTUM EMEA: +44 1256 848 766 On the Web: http://www.quantum.com/support</p>

Figure 184 Invalid Configuration RAS part 1

Recommended Actions	
Invalid Configuration	
IF	THEN
The configuration file containing the error is <code>filesystems.config</code> , and the error indicates that an entry is missing:	<p>Examine the configuration file to identify the missing entry.</p> <ul style="list-style-type: none"> If the entry should be included in the configuration file, add it to the file. If the entry should not be included in the configuration file, contact the Quantum Technical Assistance Center to clean up the database entries.
The list of managed file system names do not match for TSM and CVFS:	<p>If the file system is supposed to be managed by TSM but is listed as not managed, do the following:</p> <ol style="list-style-type: none"> Stop StorNext. Change the <code>/usr/adc/dsm/config/</code> configuration file for that file system. Change the "Data Migration" property from "No" to "Yes." Note: Verify with your system administrator that other settings in the configuration file are valid. Restart StorNext. <p>If the file system is not supposed to be managed by TSM but is listed as managed, contact the Quantum Technical Assistance Center for assistance locating and deleting all StorNext management data for all data on that file system.</p>
Multiple tape drives have the same serial number and device path:	<ol style="list-style-type: none"> Restart the StorNext software system, which will correct the internal records of the device path and serial number. If the problem persists, contact the Quantum Technical Assistance Center.
A configured tape drive has an invalid slot identifier:	<ol style="list-style-type: none"> Use the StorNext GUI to delete and then re-add the drive. <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> Contact the Quantum Technical Assistance Center.
A configured tape drive has no detectable SCSI device path:	<ol style="list-style-type: none"> Verify that the device is powered on. Verify that the device has not registered any errors. Verify that the device is physically connected by checking all cabling and connections. Verify that the device is correctly mapped to the host server. (Caution: If your system configuration allows you to logically remap all devices, verify that StorNext has been stopped prior to beginning the remapping. Restart StorNext after the remapping is complete.
A managed tape drive does not have a corresponding TSM <code>CfgD1r</code> element:	<ol style="list-style-type: none"> Use the StorNext GUI to delete and then re-add the drive. <p style="text-align: center;">OR</p> <ol style="list-style-type: none"> Contact the Quantum Technical Assistance Center.
You receive one of the following "Invalid Media Configuration" messages: <ul style="list-style-type: none"> MSM does not have any Data media classes A TSM Media type could not be converted to an MSM media type MSM does not have any MediaCriteria for managed media 	Contact the Quantum Technical Assistance Center for help further diagnosing the invalid media configuration.
A TSM Data Policy media type does not match any media existing in the system:	<ul style="list-style-type: none"> If the data policy media type is correct, add that type of media to an archive that supports that media type. <p style="text-align: center;">OR</p> <ul style="list-style-type: none"> If the data policy media type is incorrect, change that policy's media type to the correct media type.

Figure 185 Invalid Configuration RAS part 2

<p>A media ID that exists in TSM does not exist in MSM.</p>	<ol style="list-style-type: none"> 1. Visually locate the medium in a specific archive. 2. Run the <code>vsaudit</code> command and verify that the medium now appears as a New Medium. 3. Run the <code>vsreclassify</code> command, converting the medium from the ADDBLANK to the DATA media class. <p>If the medium does not physically exist in any archive or if the above commands fail, contact the Quantum Technical Assistance Center.</p>								
<p>The SNAPI configuration file is not valid.</p>	<p>Correct the errors in the configuration file <code>/usr/adc/SNAPI/config/snapi.cfg</code>.</p>								
<p>The problem IS resolved:</p>	<p>Close the service ticket. Refer to Closing Service Tickets.</p>								
<p>The problem has NOT been resolved:</p>	<ol style="list-style-type: none"> 1. Modify the ticket according to the troubleshooting steps taken. Refer to Analyzing Service Tickets. 2. Contact the Quantum Technical Assistance Center. <table style="margin-left: 20px;"> <tr> <td>In the USA:</td> <td>1-800-284-5101</td> </tr> <tr> <td>UK, France and Germany:</td> <td>00800 4 QUANTUM</td> </tr> <tr> <td>EMEA:</td> <td>+44 1256 848 766</td> </tr> <tr> <td>On the Web:</td> <td>http://www.quantum.com/support</td> </tr> </table> 	In the USA:	1-800-284-5101	UK, France and Germany:	00800 4 QUANTUM	EMEA:	+44 1256 848 766	On the Web:	http://www.quantum.com/support
In the USA:	1-800-284-5101								
UK, France and Germany:	00800 4 QUANTUM								
EMEA:	+44 1256 848 766								
On the Web:	http://www.quantum.com/support								

Appendix I: RAS Messages
Other RAS Messages